

EC axial fan

with brushless DC motor
Automotive



Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd
Phone +86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com



Nominal data

Type	W3G300-BV24-01	
Motor	M3G084-BF	
Nominal voltage	VDC	26
Nominal voltage range	VDC	16 .. 32
Type of data definition		fa
Speed	min ⁻¹	3160
Power input	W	205
Current draw	A	7.9
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	95/110
Starting current	A	10

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.00

* Specific ratio = 1 + p_{fs} / 100 000 Pa

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}	%	46.1	25.8	29.8
Efficiency grade N		56.3	36	40
Power input P _e	kW	0.24		
Air flow q _v	m ³ /h	1805		
Pressure increase p _{fs}	Pa	197		
Speed n	min ⁻¹	3040		

Data definition with optimum efficiency. LU-141130
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



Technical features


Mass	2 kg
Size	300 mm
Material of blades	PA plastic
Material of wall ring	PA plastic
Number of blades	7
Direction of air flow	"V"
Balance quality according to DIN ISO 1940-1	G 10
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 24 KM; (motor); electronics IP 6K9K
Insulation class	"B"
Humidity class	F4-1
Note ambient temperature	Over +95° C with power derating
Max. permissible ambient motor temp. (transp./ storage)	+110 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Operation mode	S1
Motor bearing	Ball bearing; (sealed)
Life expectancies	40,000 h (typical)
Technical features	- Lowering input - Fault output (high-side switch max. 30 mA) - INVLIN (control input, inverse linear) - Output limit - Load dump (58 V) - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Temperature derating - Overvoltage detection - Over-temperature protected electronics - Line undervoltage detection
EMC directives	ECE R10 Rev.3
Electrical leads	With plug; Standby current less than 500 µA
Motor protection	Reverse polarity and locked-rotor protection
Cable exit	Lateral
Approval	E1; EAC

EC axial fan

with brushless DC motor

Automotive

Product drawing

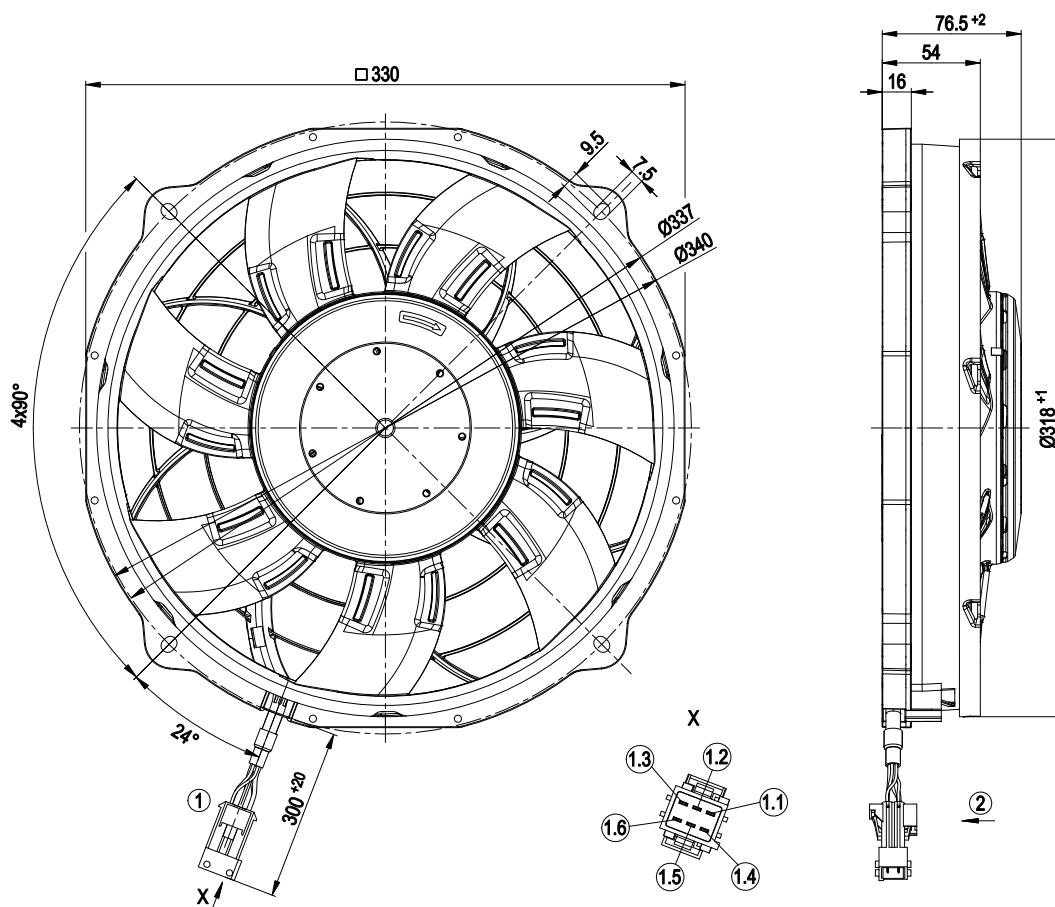


1	Connection line with plug Tyco Junior Power Timer 1-962349-1, 6-pole, coded
	Connection line (460 mm) with mating connector part no. 02002-4-1021 not included in scope of delivery
1.1	+ UB (black)
1.2	GND (brown)
1.3	PWM/LIN (yellow)
1.4	INVLIN (orange)
1.5	ABSENK (blue)
1.6	Diagnostic output (white)
2	Direction of air flow "V"

EC axial fan

with brushless DC motor

Automotive


Connection screen

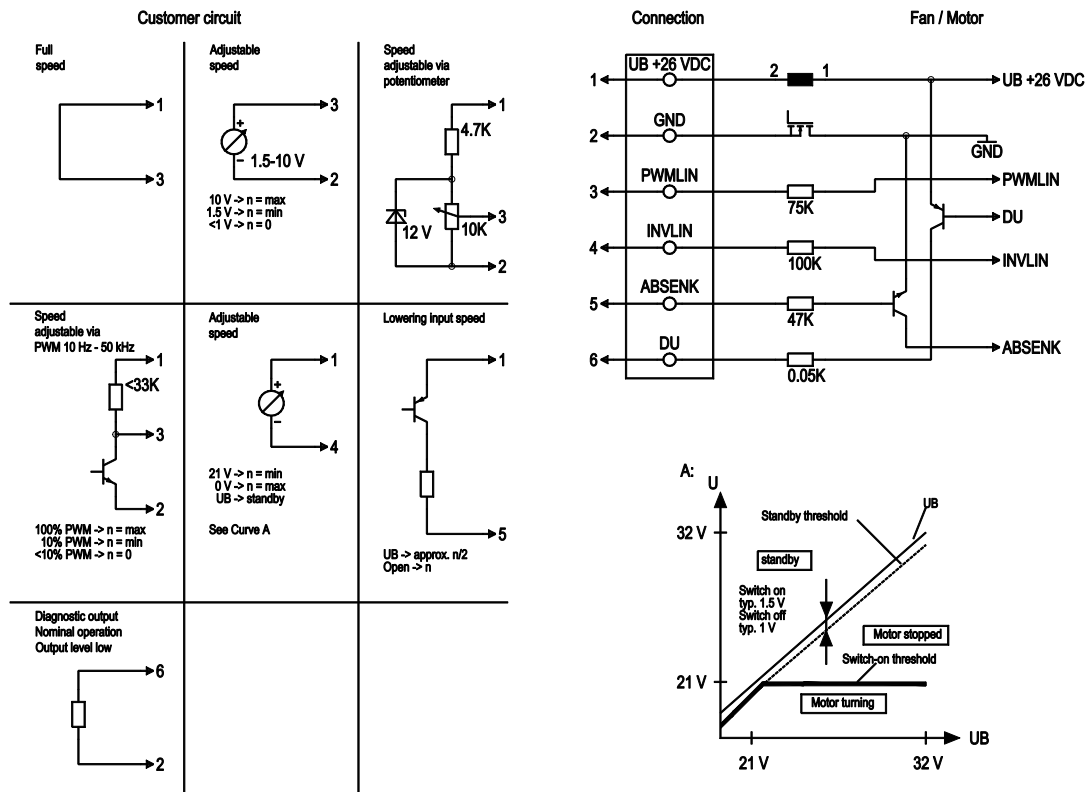

No.	Conn.	Designation	Function / assignment
1	UB +26 VDC		Power supply 26 VDC
2	GND		Power supply GND, reference ground
3	PWMLIN		Analogue voltage control input 0 -10 V or PWM
4	INVLIN		Control input, inverse linear
5	ABSENK		Lowering input
6	DU		Diagnostic output

EC axial fan
with brushless DC motor
Automotive

Charts: Air flow

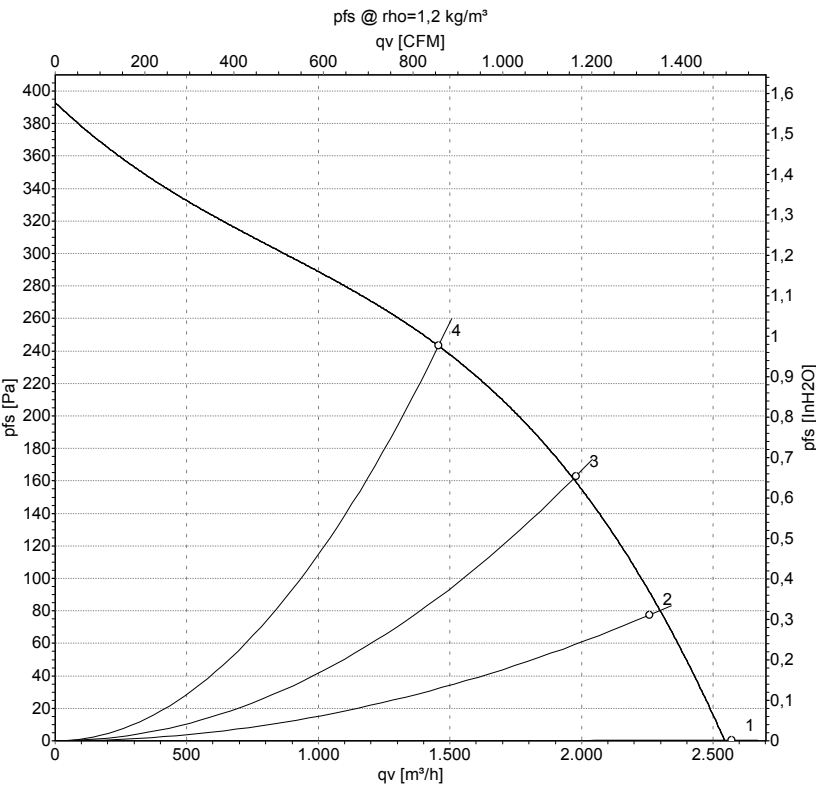

Measurement: LU-141130

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	n	P _{ed}	I	LpA _{in}	LwA _{in}	qv	p _{fs}
	V	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa
1	26	3160	205	7.90	74	82	2570	0
2	26	3155	216	8.32	73	82	2255	77
3	26	3085	240	9.24	73	81	1980	165
4	26	2965	244	9.36	73	80	1455	244

U = Supply voltage · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · qv = Air flow · p_{fs} = Pressure increase

