

G1G097-AA05-01

EC centrifugal fan

forward-curved, single-intake
with housing (without flange)



Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd
Phone +86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

Nominal data

Type	G1G097-AA05-01	
Motor	M1G045-BE	
Nominal voltage	VDC	24
Nominal voltage range	VDC	16 .. 28
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	2650
Power consumption	W	16
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Technical description


Weight	0.794 kg
Size	97 mm
Motor size	45
Rotor surface	Thick-film passivated
Impeller material	Sheet steel, hot-dip galvanized
Housing material	Sheet steel, hot-dip galvanized
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP22
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Tach output - Soft start - Control input 0-10 VDC / PWM
Motor protection	Reverse polarity and locked-rotor protection
With cable	Axial
Conformity with standards	EN 60950-1
Approval	EAC



EC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Product drawing

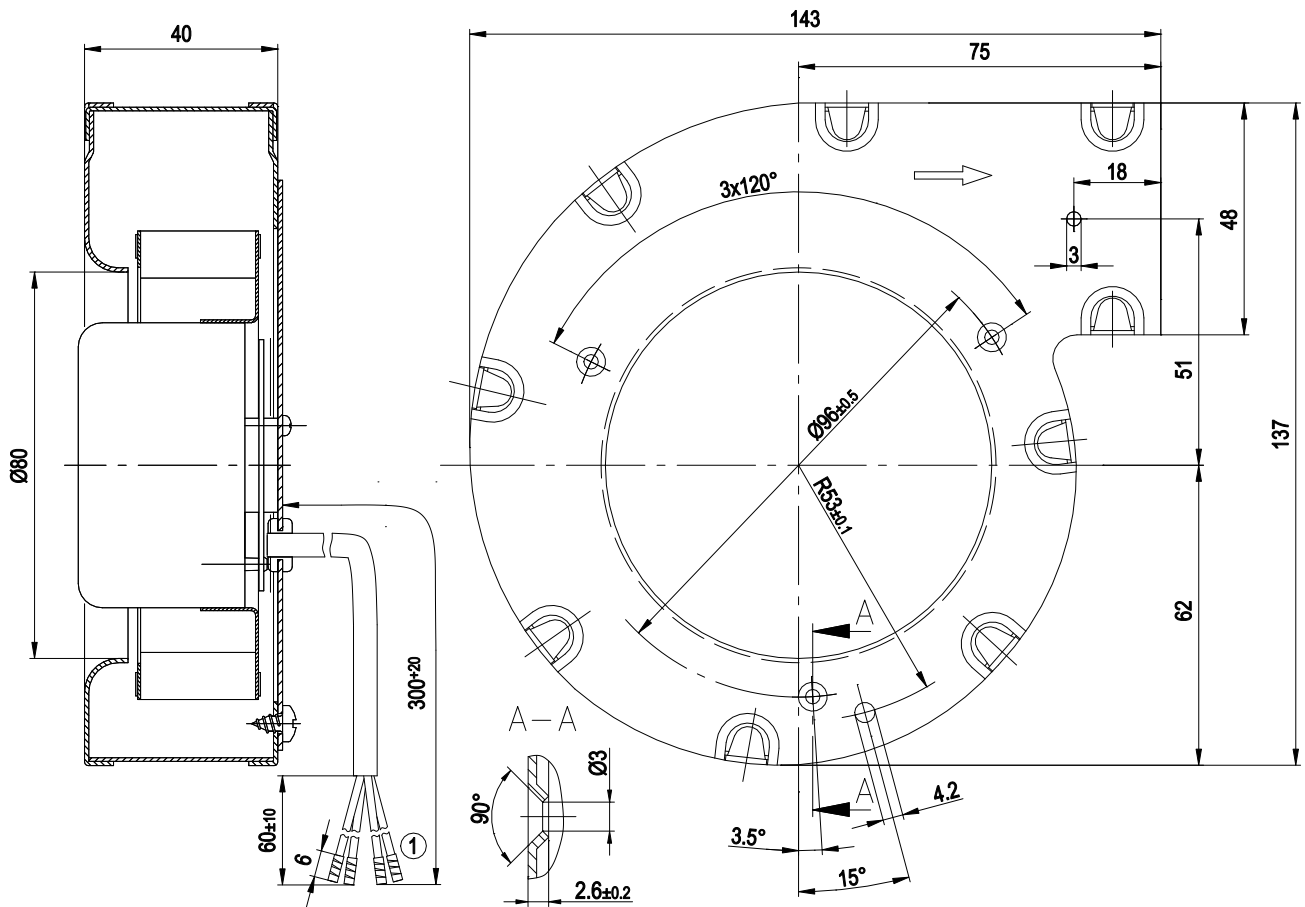


1	Cable PVC AWG22, 4 x crimped splices
---	--------------------------------------

EC centrifugal fan

forward-curved, single-intake
with housing (without flange)


Connection diagram

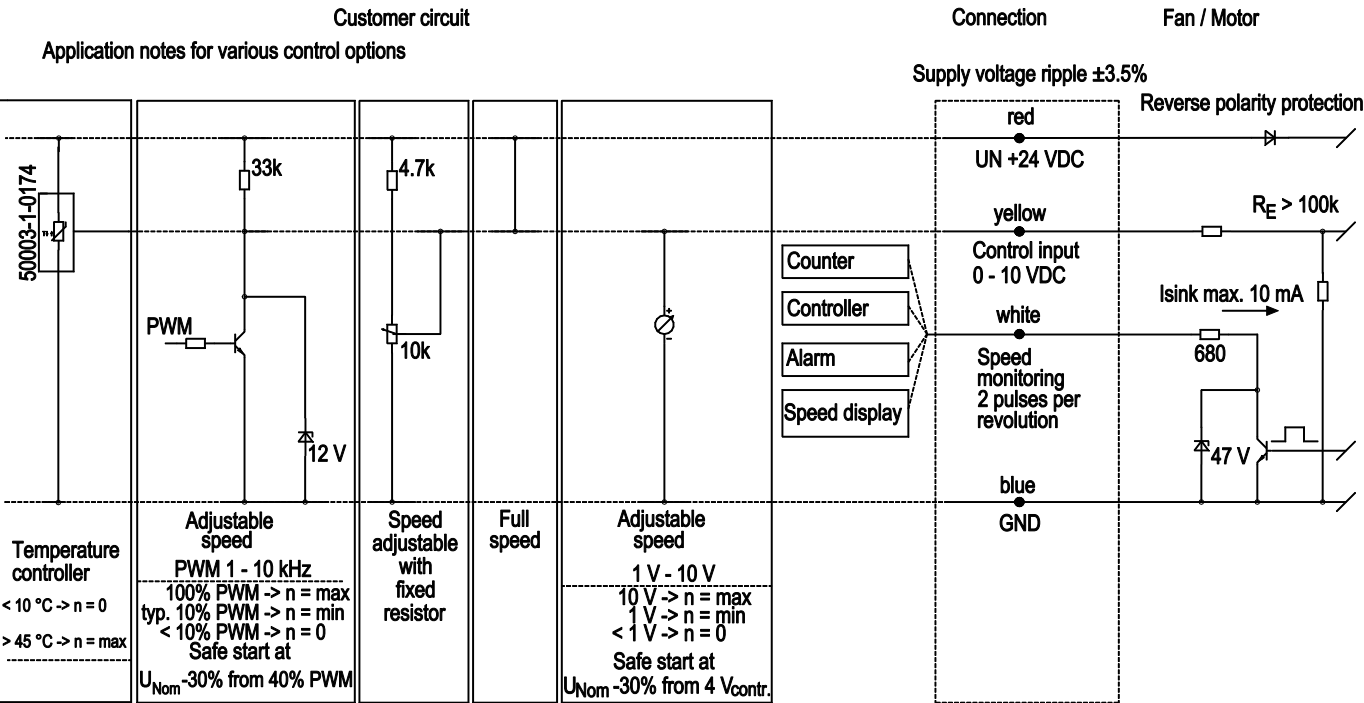

EC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Curves: Air performance

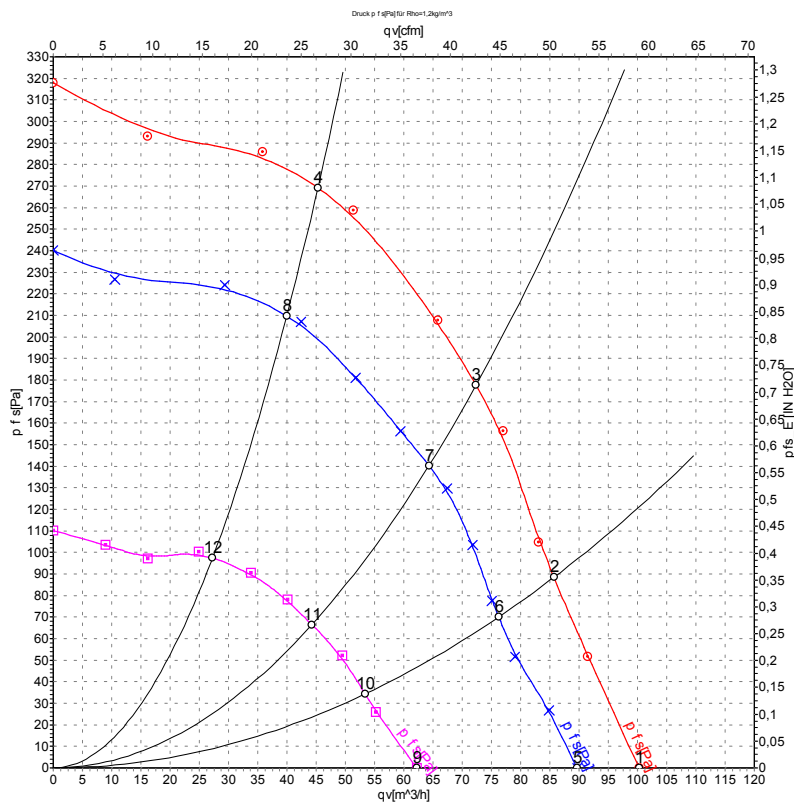

Measurement: LU-53694-1
Measurement: LU-53693-1
Measurement: LU-53695-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	28	2825	20	0.78	100	0	60	0.00
2	28	2960	18	0.71	85	88	50	0.35
3	28	3115	16	0.64	70	178	40	0.71
4	28	3410	13	0.52	45	269	25	1.08
5	24	2550	15	0.70	90	0	55	0.00
6	24	2640	13	0.61	75	70	45	0.28
7	24	2755	12	0.55	65	140	40	0.56
8	24	3005	9.4	0.45	40	210	25	0.84
9	16	1820	6.0	0.44	60	0	35	0.00
10	16	1885	5.5	0.41	55	34	30	0.14
11	16	1950	5.0	0.38	45	66	25	0.26
12	16	2085	4.0	0.33	25	98	15	0.39

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

