

AC diagonal module

single inlet
with support bracket



Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd
Phone +86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

Nominal data

Type	K2E200-AA52-02			
Motor	M2E068-CF			
Phase		1~	1~	1~
Nominal voltage	VAC	230	230	230
Frequency	Hz	50	60	60
Type of data definition		fa	fa	fa
Valid for approval / standard		CE	CE	UL 2111
Speed	min ⁻¹	2650	2950	2950
Power input	W	65	90	100
Current draw	A	0.3	0.4	0.42
Motor capacitor	μF	2	2	2
Capacitor voltage	VDB	400	400	400
Capacitor standard		P0 (CE)	P0 (CE)	UL
Min. back pressure	Pa	0	0	0
Max. back pressure	Pa	200	245	245
Min. ambient temperature	°C	-25	-25	-25
Max. ambient temperature	°C	80	80	80

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



Technical features


Mass	2.1 kg
Size	200 mm
Surface of rotor	Coated in black
Material of impeller	PA plastic
Housing material	PA plastic
Material of support bracket	PA plastic
Number of blades	7
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position
Insulation class	"F"
Humidity class	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Electrical leads	STK; Capacitor mounted
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Protection class	I (if protective earth is connected by customer)
Motor capacitor according to EN 60252-1 in safety protection class	P0/S0
Product conforming to standard	EN 60335-1; CE
Approval	CSA C22.2 Nr.77; UL 2111

AC diagonal module

single inlet


with support bracket

Product drawing

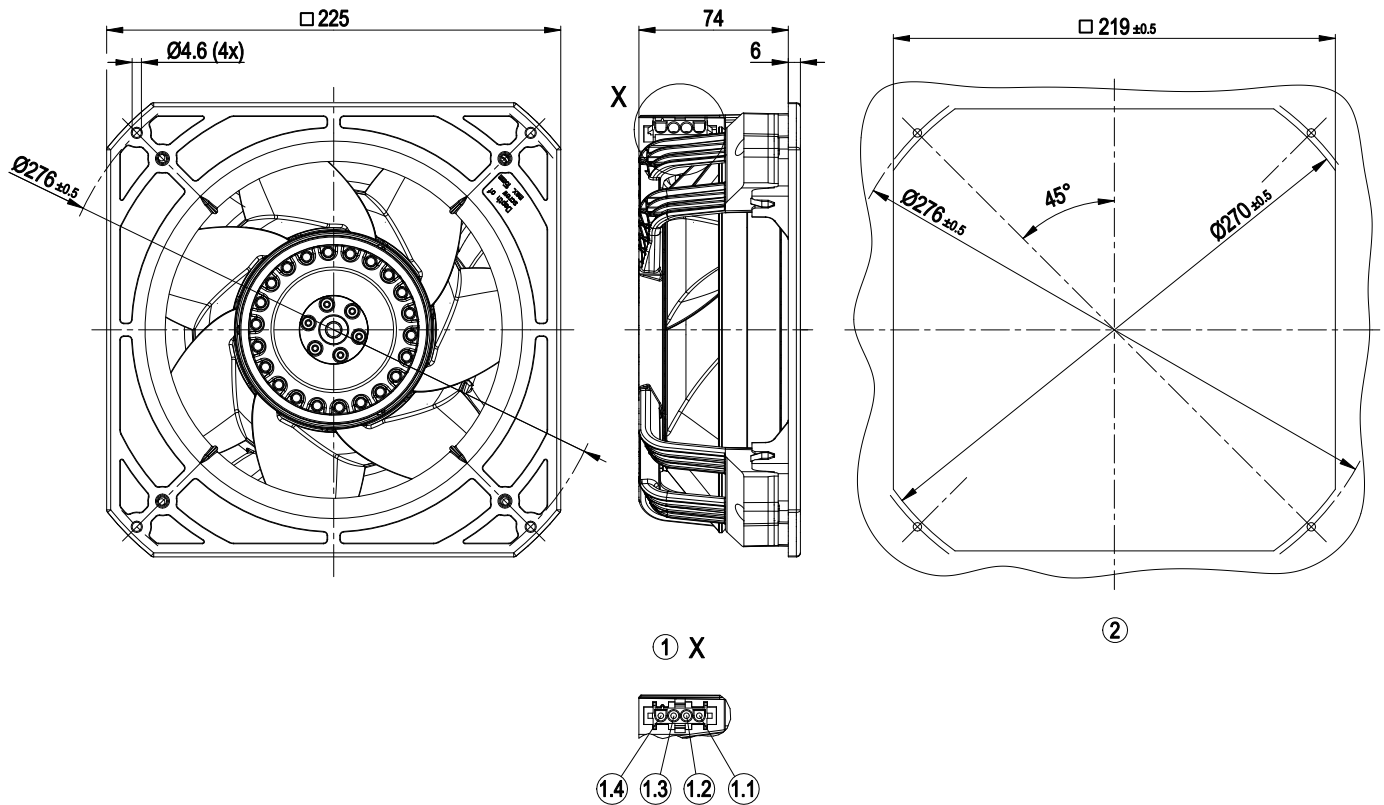

1	Coded plug system Tyco
	Connector housing 4-pole Tyco 1586845-1
	2x plug pin Tyco 926885-1, 1x plug pin Tyco 350538-1
	Mating connector (not included in scope of delivery):
	Connector housing 4-pole Tyco 926298-6
	4x female connector Tyco 926884-1
1.1	PE
1.2	L
1.3	N + capacitor
1.4	Not assigned
2	Mounting dimensions

Connection screen




L	blue	N	black	PE	green/yellow
---	------	---	-------	----	--------------

AC diagonal module

single inlet
with support bracket

Charts: Air flow 50 Hz

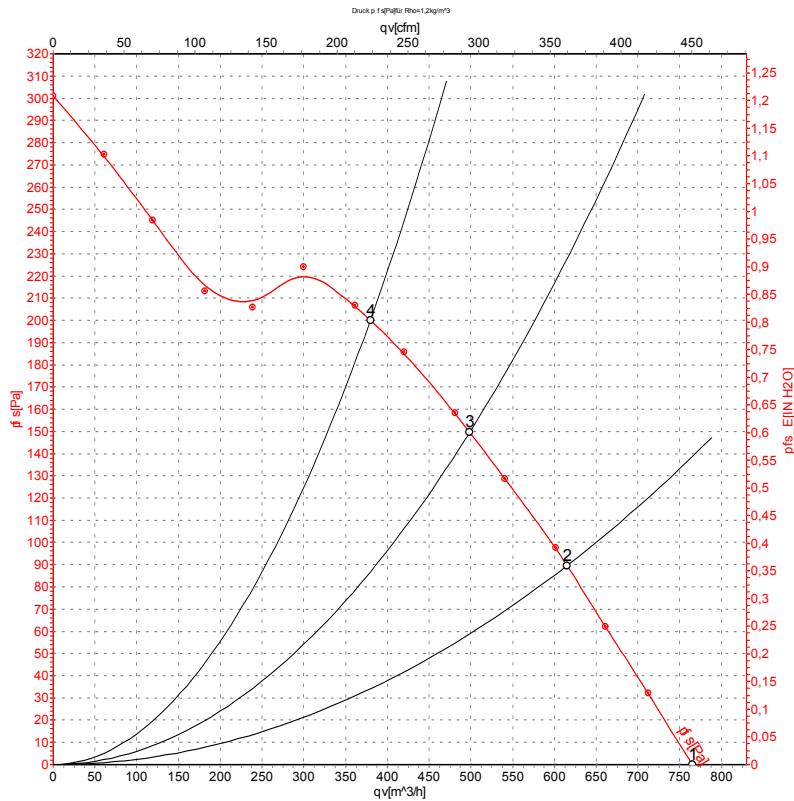

Measurement: LU-123757

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.


Measured values

	U	f	n	P _e	I	L _{pA_{in}}	L _{wA_{in}}	qv	p _{ts}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa
1	230	50	2650	65	0.30	62	70	765	0
2	230	50	2620	67	0.30	59	68	615	90
3	230	50	2605	68	0.30	59	67	500	150
4	230	50	2610	68	0.30	61	69	380	200

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · L_{pA_{in}} = Sound pressure level inlet side · L_{wA_{in}} = Sound power level inlet side · qv = Air flow
p_{ts} = Pressure increase



Charts: Air flow 60 Hz

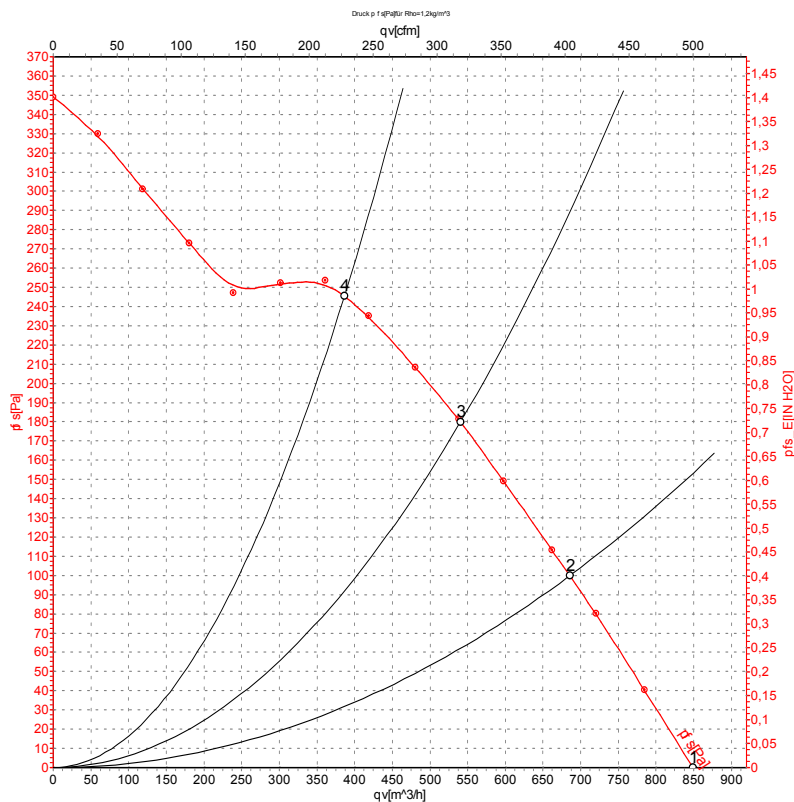

Measurement: LU-123761

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa
1	230	60	2950	90	0.40	65	73	850	0
2	230	60	2865	93	0.41	62	70	685	100
3	230	60	2820	96	0.42	61	69	540	180
4	230	60	2840	94	0.41	63	71	385	245

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · qv = Air flow
p_{fs} = Pressure increase

