

AC axial panel fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd
Phone +86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

Nominal data

Type	S4D300-AR36-48							
Motor	M4D068-CF							
Phase		3~	3~	3~	3~	3~	3~	3~
Nominal voltage	VAC	230	265	400	400	440	460	480
Wiring		Δ	Δ	Y	Y	Y	Y	Y
Frequency	Hz	50	60	50	60	60	60	60
Method of obtaining data		fa	fa	fa	fa	fa	fa	fa
Valid for approval/standard		CE	CE	CE	CE	CE	CE	CE
Speed (rpm)	min ⁻¹	1300	1490	1300	1380	1430	1490	1500
Power consumption	W	45	67	45	60	64	67	70
Current draw	A	0.16	0.19	0.09	0.1	0.1	0.11	0.12
Max. back pressure	Pa	45	53	45	45	51	53	55
Max. back pressure	in. wg	0.18	0.21	0.18	0.18	0.2	0.21	0.22
Min. ambient temperature	°C	-40	-40	-40	-40	-40	-40	-40
Max. ambient temperature	°C	80	65	80	65	65	65	65

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

AC axial panel fan

sickle-shaped blades (S series)
with guard grille for short nozzle


Technical description

Weight	2.95 kg
Size	300 mm
Motor size	68
Rotor surface	Painted black
Terminal box material	PP plastic
Blade material	Sheet steel, painted black
Guard grille material	Steel, coated with signal white plastic (RAL 9003)
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+70 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing with low-temperature lubricant
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Terminal box
Motor protection	Thermal switch auto reset, lead out, with basic insulation
With cable	Axial
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.

AC axial panel fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Product drawing

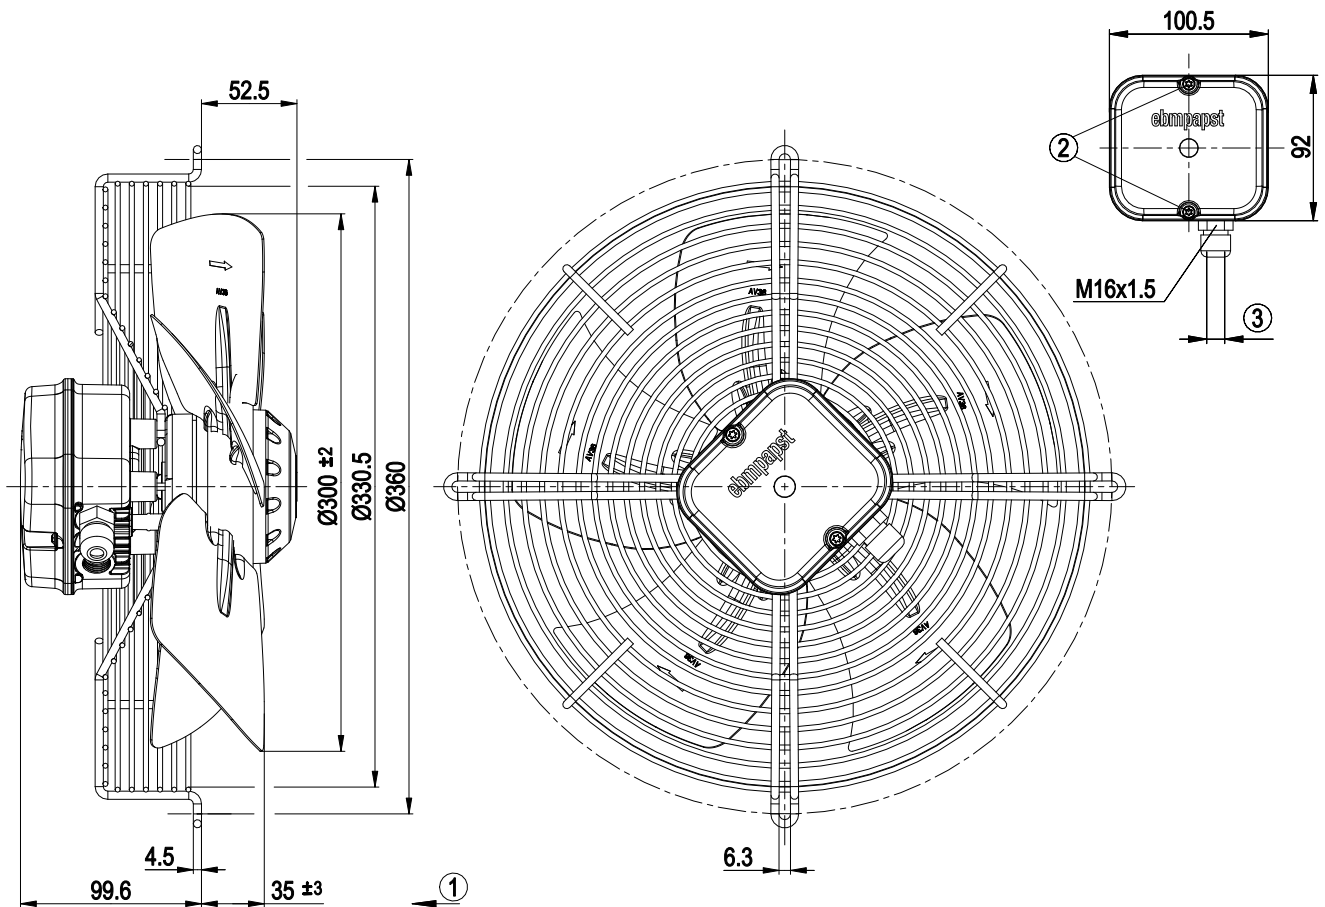


1	Direction of air flow "V"
2	Tightening torque 1.5 ± 0.2 Nm
3	Cable diameter: max. 7.5 mm, tightening torque 1.3 ± 0.2 Nm

AC axial panel fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Connection diagram

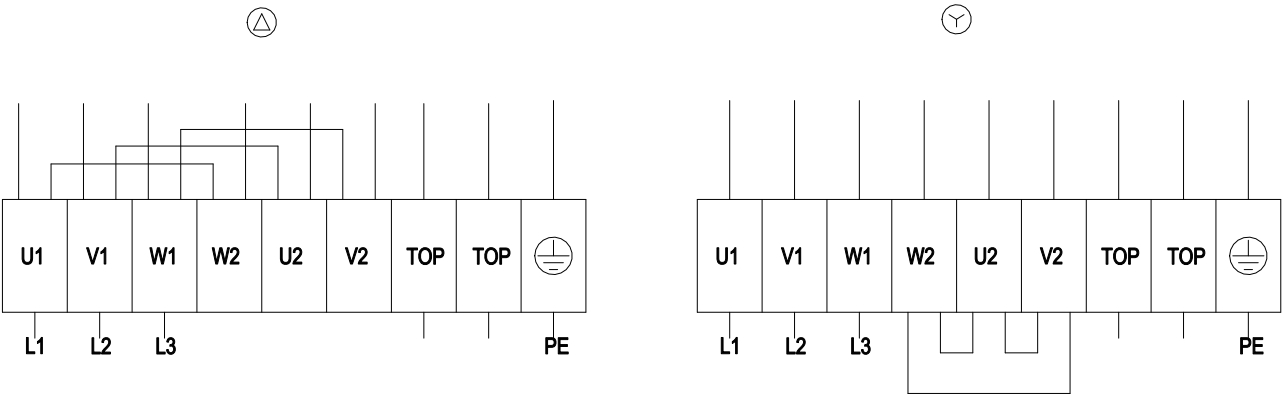


△	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x gray
PE	green/yellow				

AC axial panel fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Curves: Air performance 50 Hz

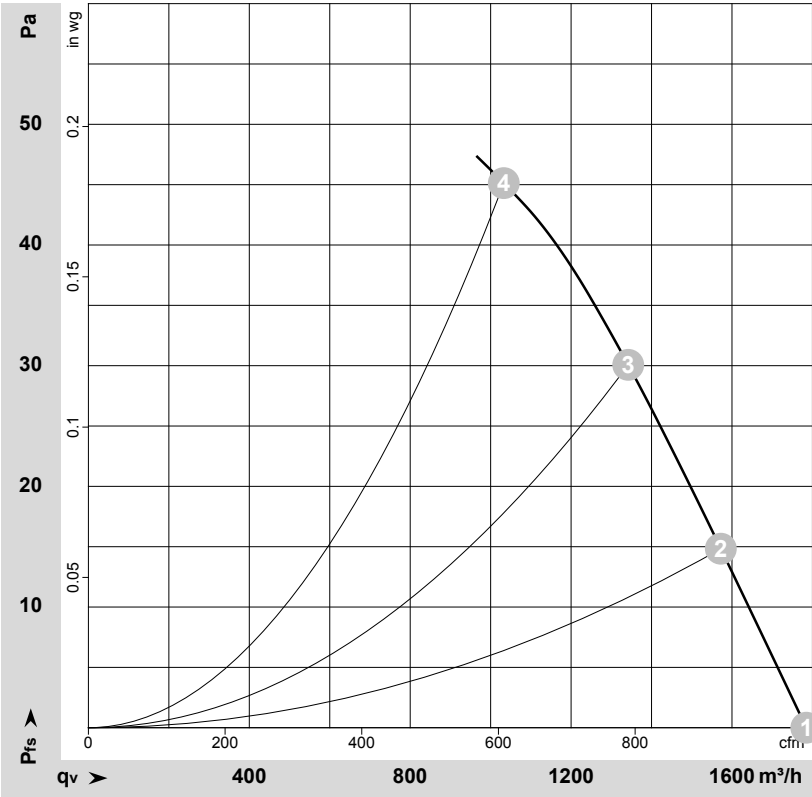

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-110338-1
Date: 2008-05-15
Housing: 03968-2-4037

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.


Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	Y	400	50	1300	45	0.09	1785	0	1050	0.00
2	Y	400	50	1265	50	0.09	1570	15	925	0.06
3	Y	400	50	1230	54	0.10	1340	30	790	0.12
4	Y	400	50	1185	60	0.10	1035	45	610	0.18

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

AC axial panel fan
sickle-shaped blades (S series)
with guard grille for short nozzle

Curves: Air performance 60 Hz

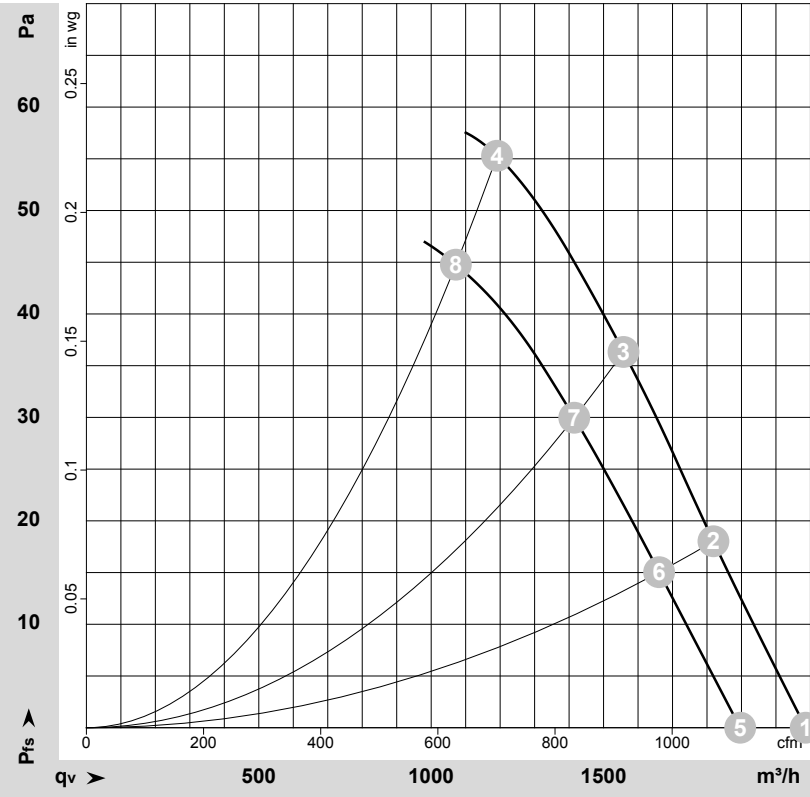

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-110546-1
Date: 2008-05-29
Housing: 03968-2-4037

Measurement: LU-110339-1
Date: 2008-05-15
Housing: 03968-2-4037

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	Y	460	60	1490	67	0.11	2085	0	1230	0.00
2	Y	460	60	1440	75	0.11	1820	18	1070	0.07
3	Y	460	60	1395	81	0.12	1560	36	915	0.14
4	Y	460	60	1335	88	0.12	1190	55	700	0.22
5	Y	400	60	1380	60	0.10	1895	0	1115	0.00
6	Y	400	60	1325	66	0.11	1660	15	980	0.06
7	Y	400	60	1275	71	0.11	1415	30	835	0.12
8	Y	400	60	1195	77	0.12	1070	45	630	0.18

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase