

Nominal data

Type	W3G300-QX25-33	
Motor	M3G084-BF	
Nominal voltage	VDC	26
Nominal voltage range	VDC	16 .. 32
Method of obtaining data		fa
Status		prelim.
Speed (rpm)	min ⁻¹	3800
Power consumption	W	400
Current draw	A	15.0
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	85

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	50.4	31.6	09 Power consumption P_e	kW	0.46
02 Measurement category		A		09 Air flow q_v	m ³ /h	2050
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	373
04 Efficiency grade N		58.8	40	10 Speed (rpm) n	min ⁻¹	3645
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-187429

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

EC axial fan

with brushless DC motor


Technical description

Weight	2 kg
Size	300 mm
Motor size	84
Impeller material	PA plastic
Fan housing material	PA plastic
Number of blades	7
Airflow direction	V
Balancing grade according to DIN ISO 21940-11	G 10
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	Motor IP24 KM, electronics IP6K9K (mating connector installed)
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H4
Ambient temperature note	Over +85 °C with power derating
Max. permitted ambient temp. for motor (transport/storage)	+85 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing; (sealed)
Life expectancy	40,000 h (typical)
Technical features	- Error output (high-side switch) - Power limiter - Load dump (58 V) - Motor current limitation - Reverse operation (reversal of rotation) - Soft start - Control input 0-10 VDC / PWM - Temperature derating - Overvoltage detection - Thermal overload protection for electronics - Line undervoltage detection
Electrical hookup	Connector with cable; Standby current less than 500 µA
Motor protection	Reverse polarity and locked-rotor protection
With cable	Lateral
Protection class assignment	Built-in component, protection class is based on the intended installation. This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Approval	EAC

EC axial fan

with brushless DC motor

Product drawing

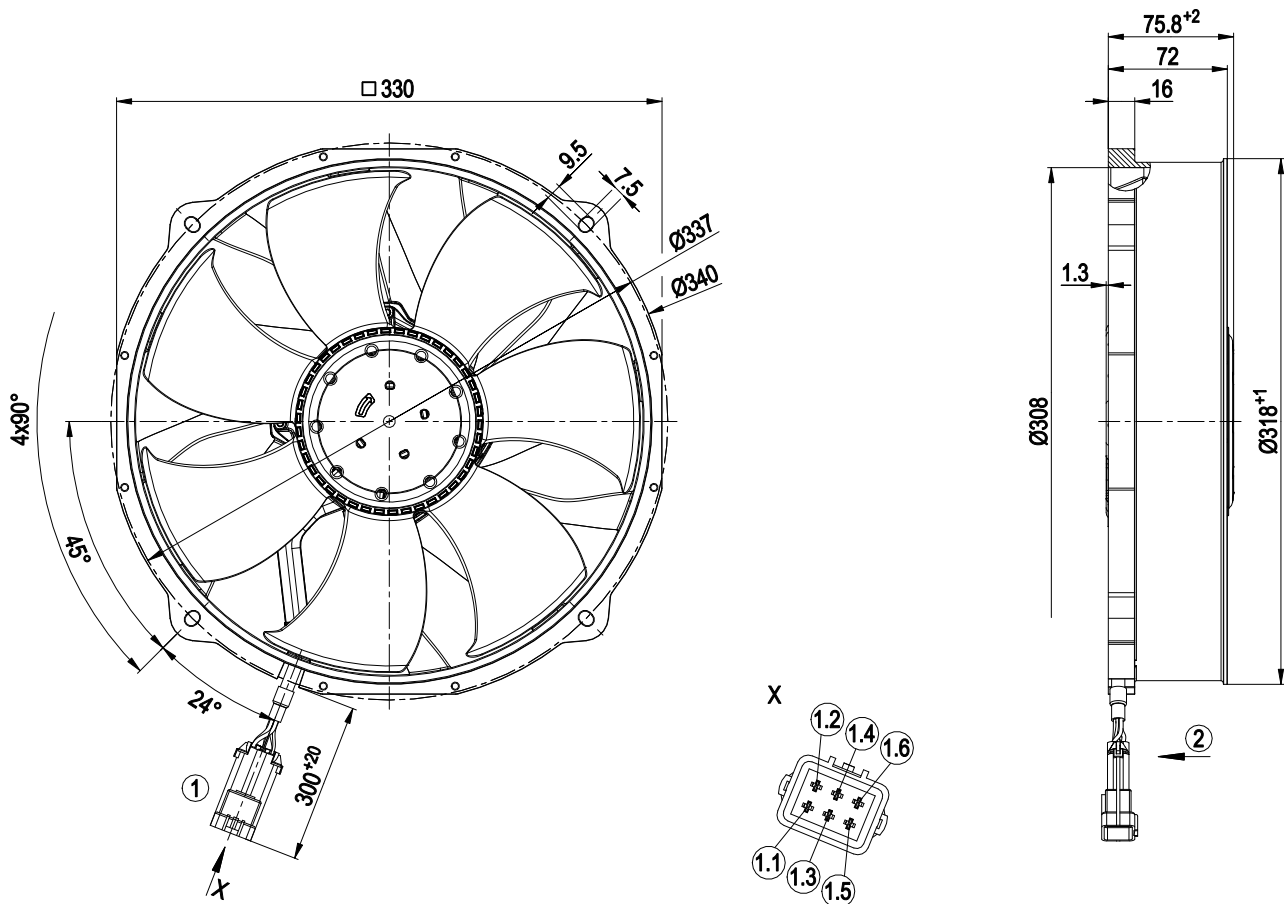


1	Cable FLRYW 2x 3 mm ² , 3x 0.75 mm ² 6-pole connector housing Delphi 12185126, 3x flat plug Delphi 12185129, 2x flat plug Delphi 12185237, 3x seal Delphi 15324974, 2x seal Delphi 15324976, 1x dummy plug Delphi 10730124, 1x locking cover Delphi 12185000
1.1	+ UB
1.2	GND
1.3	PWM/LIN
1.4	Not used / no function
1.5	Reverse
1.6	Diagnostic output
	6-pole mating connector Delphi 15344052, 3x flat plug Delphi 12158098, 2x flat plug Delphi 12185008, 3x seal Delphi 15324974, 2x seal Delphi 15324976, 1x dummy plug Delphi 10730124, 1x locking cover Delphi 12185000
2	Airflow direction "V"

EC axial fan


with brushless DC motor

Connection diagram

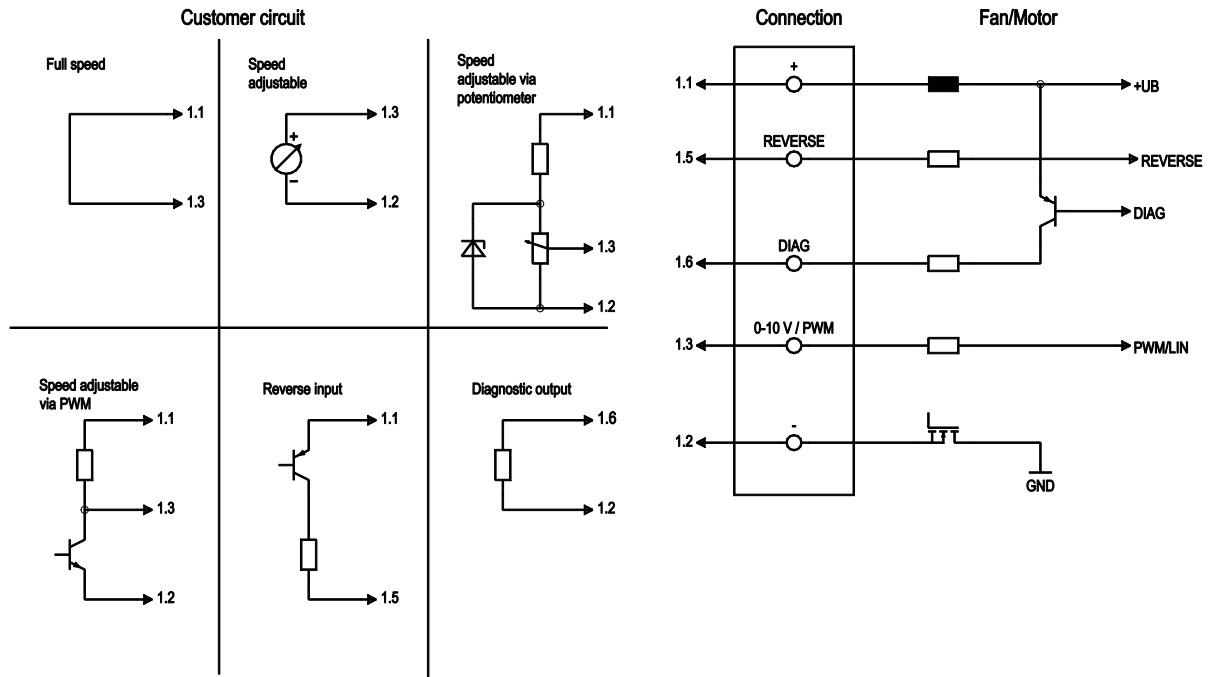

No.	Conn.	Designation	Color	Function/assignment
1.1	1	+	black	Power supply, see nameplate for voltage range
1.2	2	-	brown	Power supply, see nameplate for voltage range
1.5	3	Reverse	blue	Reversal of rotation input: Ri = 47 kΩ connected to power supply + -> direction of rotation is reversed, or open -> reversal of rotation inactive
1.6	4	DIAG	white	Diagnostic output: Ri = 0.05 kΩ output level in nominal operation -> Low
1.3	5	0-10 V / PWM	yellow	Control input: Ri > 42 kΩ 0-10 V (typ. <1 V -> n = 0; 1.5 V -> n = min.; 10 V -> n = max.), potentiometer (limit voltage at potentiometer with 12 V Z-diode) or PWM (>12 V; 0.1-50 kHz; typ. <2% -> n = 0; 5% -> n = min. ; 100% -> n = max.)

Curves: Air performance

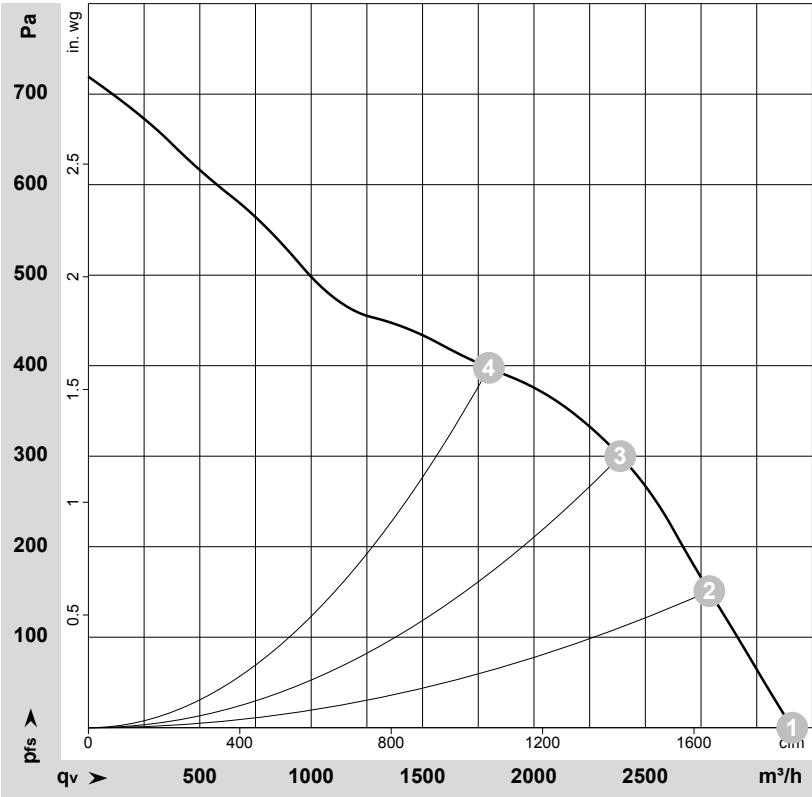

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-187429-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	26	3800	400	15.00	80	88	3160	0	1860	0.00
2	26	3725	426	16.37	79	87	2785	150	1640	0.60
3	26	3700	465	17.89	79	87	2385	300	1405	1.20
4	26	3700	462	17.74	82	89	1800	400	1060	1.61

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side · q_v = Air flow
p_{fs} = Pressure increase

