

Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd

Phone +86 10-62547612

zhangyu@bjhengrui.cn

en.bjhengrui.com

Nominal data

Type	W3G800-KS39-03	
Motor	M3G150-FF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	940
Power input	W	1950
Current draw	A	3.1
Max. back pressure	Pa	220
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data in accordance with ecodesign regulation EU 327/2011

		Actual	Request 2015
01 Overall efficiency η_{es}	%	50.7	35.2
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		55.5	40
05 Variable speed drive		Yes	

Data definition with optimum efficiency.

The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_{ed}	kW	1.75
09 Air flow q_v	m³/h	16655
09 Pressure increase p_{fs}	Pa	181
10 Speed (rpm) n	min ⁻¹	945
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-185106



Technical features

Mass	43 kg
Size	800 mm
Motor size	150
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium, painted grey
Material of impeller	PP plastic
Material of wall ring	Sheet steel, galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	0°
Direction of air flow	V
Direction of rotation	Clockwise, seen on rotor
Protection rating	IP55
Insulation class	"F"
Humidity (F) / environmental protection class (H)	H2
Note ambient temperature	Occasional start-up between -40°C and -25°C is permissible. For continuous operation at ambient temperatures below -25°C (e.g. refrigeration applications) we recommend our fan version with special low-temperature bearings.
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display via LED - External 15-50 VDC input (parametrisation) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6 - Motor current limit - RFID - ISO 15693 compatible - RS485 MODBUS RTU - Soft start - Maximum EEPROM write cycles 100,000 - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical connection	Terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE

W3G800-KS39-03

EC axial fan - AxiBlade

sickled blades (S series)

with full square nozzle

Approval

EAC; CSA C22.2 no. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730




EC axial fan - AxiBlade

sickled blades (S series)

with full square nozzle

Product drawing

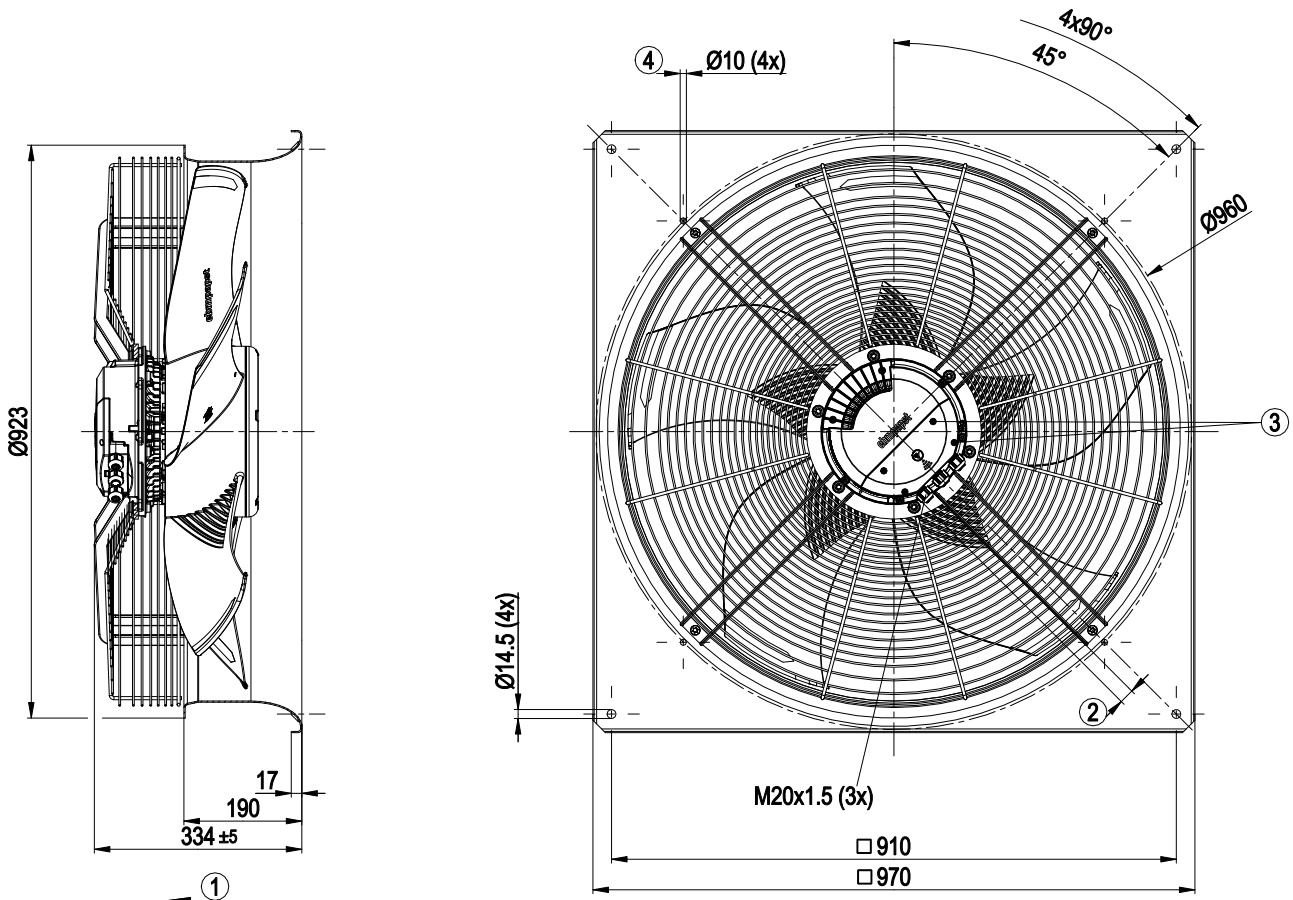


1	Direction of air flow "V"
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 2 ± 0.3 Nm
3	Tightening torque 1.5 ± 0.2 Nm
4	Mounting holes for FlowGrid

EC axial fan - AxiBlade

sickled blades (S series)


with full square nozzle

Connection screen

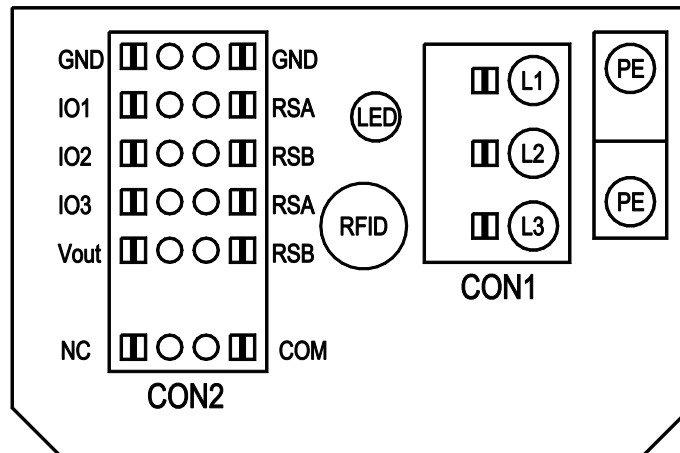

No.	Conn.	Designation	Function / assignment
CON1	-	L1, L2, L3	Mains connection, power supply, safety class 1
PE	-	PE	Earth connection, PE connection
CON2	-	RSA	Bus connection RS-485, RSA, MODBUS RTU; SELV
CON2	-	RSB	Bus connection RS-485, RSB, MODBUS RTU; SELV
CON2	-	GND	GND reference earth for control interface, SELV
CON2	-	IO1	IN2: Digital input - positive logic (factory setting: Enable) function parametrizable, SELV - normal: Pin open or applied voltage < 1.5 VDC - inverse: applied voltage 3.5-50 VDC
CON2	-	IO2	IN1: Analogue input 0-10 V 0-10 V, Ri=100 K, parametrizable as set value or actual value (factory setting: set value) characteristic curve parametrizable, SELV
CON2	-	IO3	OUT1: Analogue output 0-10 V 0-10 V, max 5 mA, function parametrizable (factory setting: modulation level) max. output frequency 300 Hz, SELV
CON2	-	V out	Voltage output 3.3-24 VDC +/-5%, Pmax=800 mW, voltage parametrisable (factory setting: 10 VDC) short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parametrisation via Modbus without mains power
CON2	-	COM	Status relay, floating status contact; common connection, nominal voltage 250 VAC; max 2 A (AC1): min 10 mA; Reinforced insulation as per EN60335-1, EN61800-5-1, UL60730-1
CON2	-	NC	Status relay, floating status contact, break for failure

Charts: Air flow 50 Hz

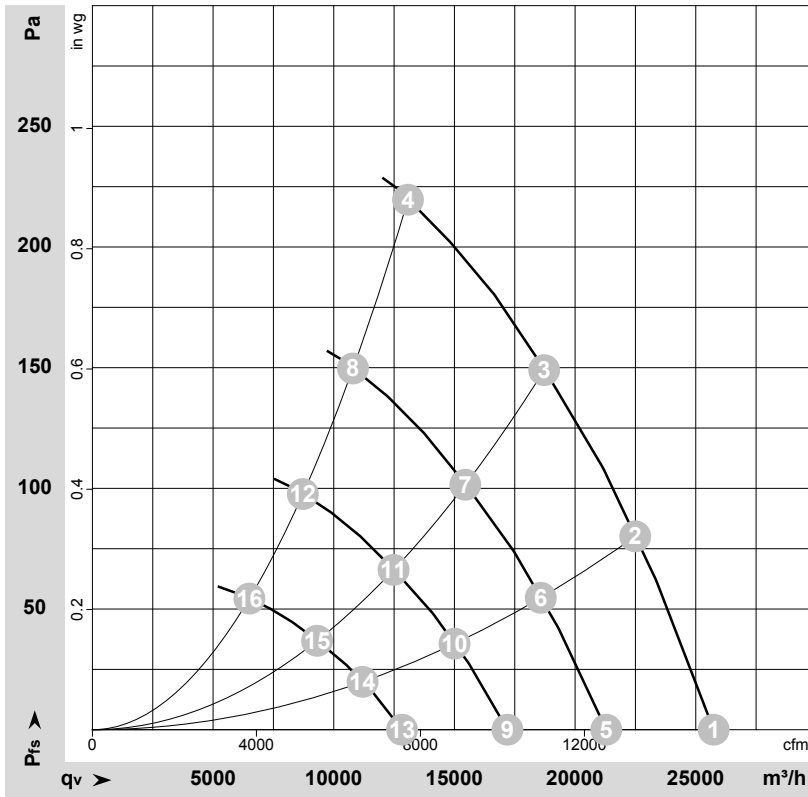

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-185106-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	400	50	940	1166	1.93	68	76	77	25740	0	15150	0.00
2	400	50	940	1457	2.35	67	74	75	22495	80	13240	0.32
3	400	50	940	1667	2.65	69	76	77	18720	150	11020	0.60
4	400	50	940	1950	3.10	79	86	88	13075	220	7695	0.88
5	400	50	780	660	1.09	64	71	72	21290	0	12530	0.00
6	400	50	780	821	1.32	62	69	70	18575	55	10935	0.22
7	400	50	780	938	1.49	65	71	72	15450	102	9095	0.41
8	400	50	780	1091	1.71	74	82	83	10795	150	6355	0.60
9	400	50	630	348	0.58	58	65	67	17195	0	10120	0.00
10	400	50	630	432	0.70	57	64	65	15005	36	8830	0.14
11	400	50	630	494	0.79	59	66	66	12480	66	7345	0.26
12	400	50	630	575	0.90	69	76	77	8720	98	5130	0.39
13	400	50	470	144	0.24	51	58	59	12830	0	7550	0.00
14	400	50	470	180	0.29	49	56	57	11195	20	6590	0.08
15	400	50	470	205	0.33	52	59	59	9310	37	5480	0.15
16	400	50	470	239	0.37	61	69	70	6505	54	3830	0.22

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · LwA_{out} = Sound power level outlet side
q_v = Air flow · P_{fs} = Pressure increase

