

40x40x20 mm

6.3~10.8 CFM




# ■ Specification


|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MF40200V1-10000-A99                                                               | ●       | 5             | 150           | 0.75              | 7000  | 8.9     | 0.22                    | 25.5    | 29.0   | 2     |
| MF40200V2-10000-A99                                                               | ●       | 5             | 107           | 0.54              | 6000  | 7.7     | 0.17                    | 21.0    | 29.0   | 3     |
| MF40200V3-10000-A99                                                               | ●       | 5             | 75            | 0.38              | 5000  | 6.3     | 0.11                    | 16.5    | 29.0   | 4     |
| MF40201VX-10000-A99                                                               | ●       | 12            | 80            | 0.96              | 8000  | 10.8    | 0.29                    | 27.5    | 29.0   | 1     |
| MF40201V1-10000-A99                                                               | ●       | 12            | 58            | 0.70              | 7000  | 8.9     | 0.22                    | 25.5    | 29.0   | 2     |
| MF40201V2-10000-A99                                                               | ●       | 12            | 45            | 0.54              | 6000  | 7.7     | 0.17                    | 21.0    | 29.0   | 3     |
| MF40201V3-10000-A99                                                               | ●       | 12            | 38            | 0.46              | 5000  | 6.3     | 0.11                    | 16.5    | 29.0   | 4     |
| MF40202VX-10000-A99                                                               | ●       | 24            | 39            | 0.94              | 8000  | 10.8    | 0.29                    | 27.5    | 29.0   | 1     |
| MF40202V1-10000-A99                                                               | ●       | 24            | 32            | 0.77              | 7000  | 8.9     | 0.22                    | 25.5    | 29.0   | 2     |
| MF40202V2-10000-A99                                                               | ●       | 24            | 25            | 0.60              | 6000  | 7.7     | 0.17                    | 21.0    | 29.0   | 3     |

# ■ Function (MF Series) R Type : F99 / F Type : G99

## ■ Air Flow-Static Pressure Characteristics

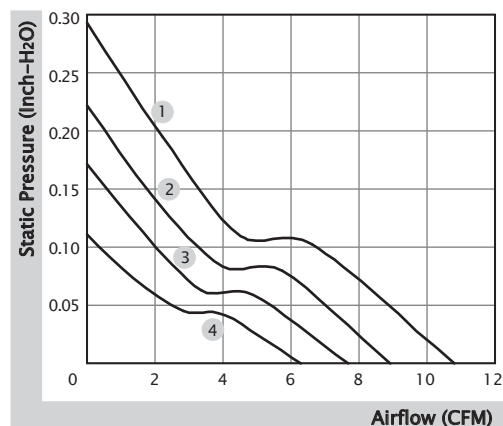


## ■ External Dimensions(mm)

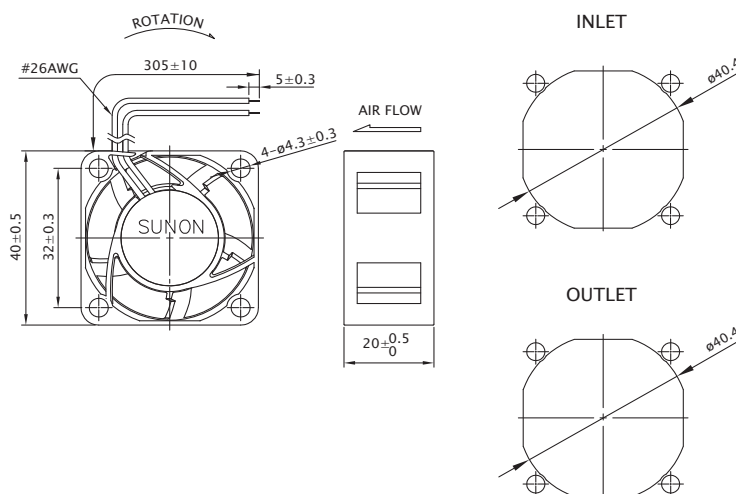

40x40x20 mm

6.3~10.8 CFM




#### ■ Specification


|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EF40201BX-10000-A99                                                               | ☼       | 12            | 65            | 0.78              | 8200  | 10.8    | 0.32                    | 28.5    | 32.5   | 1     |
| EF40201B1-10000-A99                                                               | ☼       | 12            | 55            | 0.66              | 7200  | 8.9     | 0.24                    | 24.5    | 32.5   | 2     |
| EF40201B2-10000-A99                                                               | ☼       | 12            | 40            | 0.48              | 6200  | 7.7     | 0.18                    | 21.3    | 32.5   | 3     |
| EF40201B3-10000-A99                                                               | ☼       | 12            | 35            | 0.42              | 5200  | 6.3     | 0.14                    | 16.2    | 32.5   | 4     |

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

#### ■ Air Flow-Static Pressure Characteristics

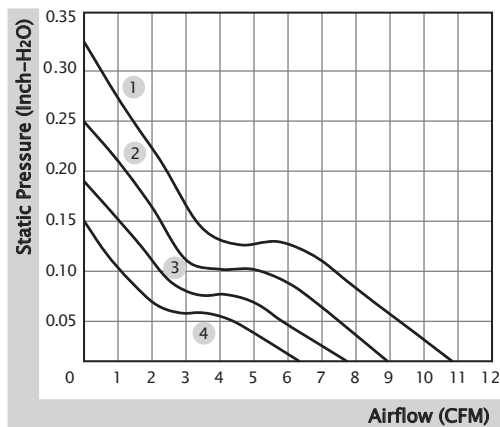

#### ■ External Dimensions(mm)

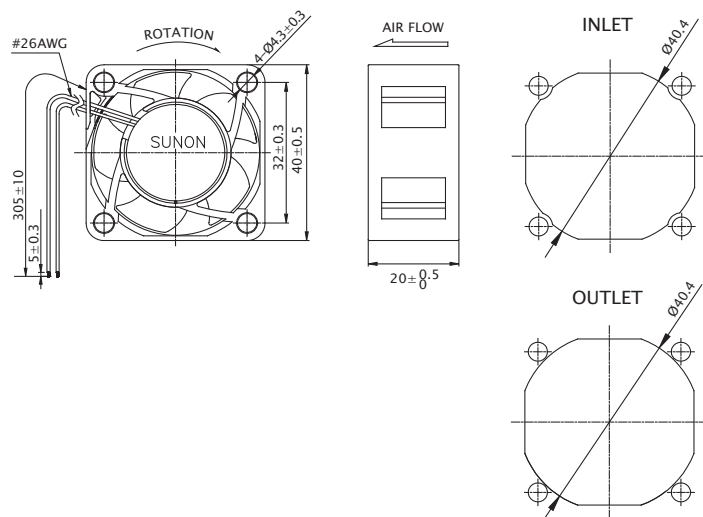

40x40x20 mm

## 5.5 CFM




### ■ Specification

|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| HA40201V4-10000-A99                                                               | ●       | 12            | 31            | 0.38              | 4500  | 5.5     | 0.10                    | 12.3    | 30.6   | 1     |

■ Function F Type : G99

## Air Flow–Static Pressure Characteristics

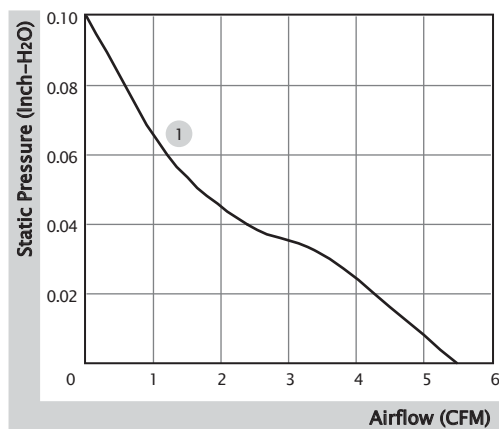

■ External Dimensions(mm)

