

40x40x20 mm


6.3~10.8 CFM




### ■ Specifications

|  | Bearing | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MF40200V1-1000U-A99                                                               | ●       | 5              | 150           | 0.75              | 7000  | 8.9      | 0.22                    | 25.5    | 29.0   | 2     |
| MF40200V2-1000U-A99                                                               | ●       | 5              | 107           | 0.54              | 6000  | 7.7      | 0.17                    | 21.0    | 29.0   | 3     |
| MF40200V3-1000U-A99                                                               | ●       | 5              | 75            | 0.38              | 5000  | 6.3      | 0.11                    | 16.5    | 29.0   | 4     |
| MF40201VX-1000U-A99                                                               | ●       | 12             | 80            | 0.96              | 8000  | 10.8     | 0.29                    | 27.5    | 29.0   | 1     |
| MF40201V1-1000U-A99                                                               | ●       | 12             | 58            | 0.70              | 7000  | 8.9      | 0.22                    | 25.5    | 29.0   | 2     |
| MF40201V2-1000U-A99                                                               | ●       | 12             | 45            | 0.54              | 6000  | 7.7      | 0.17                    | 21.0    | 29.0   | 3     |
| MF40201V3-1000U-A99                                                               | ●       | 12             | 38            | 0.46              | 5000  | 6.3      | 0.11                    | 16.5    | 29.0   | 4     |
| MF40202VX-1000U-A99                                                               | ●       | 24             | 39            | 0.94              | 8000  | 10.8     | 0.29                    | 27.5    | 29.0   | 1     |
| MF40202V1-1000U-A99                                                               | ●       | 24             | 32            | 0.77              | 7000  | 8.9      | 0.22                    | 25.5    | 29.0   | 2     |
| MF40202V2-1000U-A99                                                               | ●       | 24             | 25            | 0.60              | 6000  | 7.7      | 0.17                    | 21.0    | 29.0   | 3     |

### ■ Air Flow-Static Pressure Characteristics

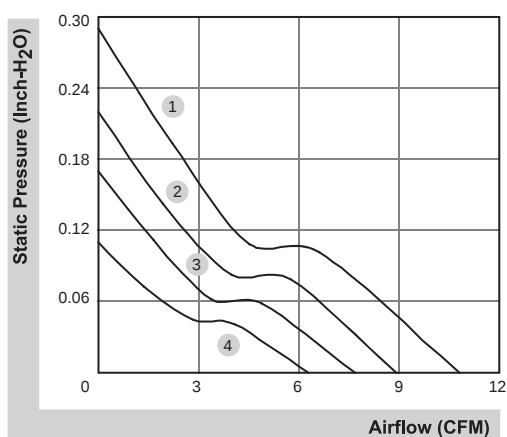

### ■ External dimensions(mm)

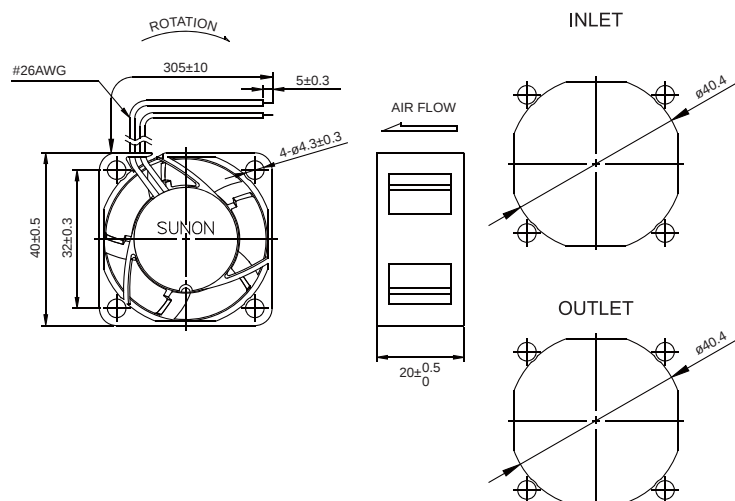


\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

40x40x20 mm


6.3~10.8 CFM




# ■ Specifications

| Model              | Bearing      | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EB40200S1-000U-999 | ○            | 5              | 218           | 1.09              | 7200  | 8.9      | 0.21                    | 25.5    | 30.0   | 2     |
| EB40200S2-000U-999 | ○            | 5              | 140           | 0.70              | 6200  | 7.7      | 0.16                    | 21.0    | 30.0   | 3     |
| EB40200S3-000U-999 | ○            | 5              | 100           | 0.50              | 5200  | 6.3      | 0.11                    | 18.0    | 30.0   | 4     |
| EB40201SX-000U-999 | ○            | 12             | 120           | 1.44              | 8200  | 10.8     | 0.27                    | 27.5    | 31.0   | 1     |
| EB40201S1-000U-999 | ○            | 12             | 90            | 1.08              | 7200  | 8.9      | 0.21                    | 25.5    | 31.0   | 2     |
| EB40201S2-000U-999 | ○            | 12             | 63            | 0.76              | 6200  | 7.7      | 0.16                    | 21.0    | 31.0   | 3     |
| EB40201S3-000U-999 | ○            | 12             | 45            | 0.54              | 5200  | 6.3      | 0.11                    | 18.0    | 31.0   | 4     |
| EB40202S1-000U-999 | ○            | 24             | 54            | 1.30              | 7200  | 8.9      | 0.21                    | 25.5    | 31.0   | 2     |
| EB40202S2-000U-999 | ○            | 24             | 33            | 0.80              | 6200  | 7.7      | 0.16                    | 21.0    | 31.0   | 3     |

## ■ Air Flow-Static Pressure Characteristics

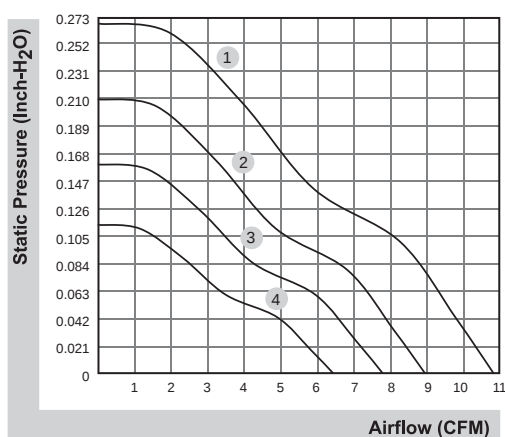

## ■ External dimensions(mm)

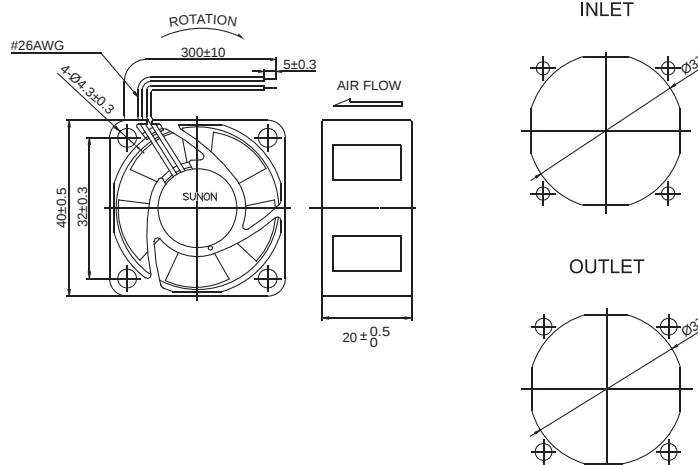

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

40x40x20 mm


6.3~10.8 CFM




### Specifications

| Model              | Bearing         | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|-----------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                    | 2BALL<br>Sleeve | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EF40201BX-000U-A99 | ☉               | 12             | 53            | 0.64              | 6800  | 10.8     | 0.27                    | 28.5    | 32.5   | 1     |
| EF40201B1-000U-A99 | ☉               | 12             | 46            | 0.56              | 6300  | 8.9      | 0.22                    | 26.5    | 32.5   | 2     |
| EF40201B2-000U-A99 | ☉               | 12             | 38            | 0.46              | 5400  | 7.7      | 0.16                    | 22.0    | 32.5   | 3     |
| EF40201B3-000U-A99 | ☉               | 12             | 34            | 0.41              | 5000  | 6.3      | 0.14                    | 19.0    | 32.5   | 4     |

### Air Flow-Static Pressure Characteristics

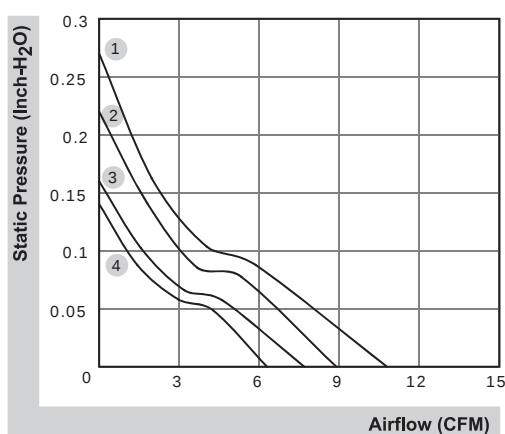

### External dimensions(mm)

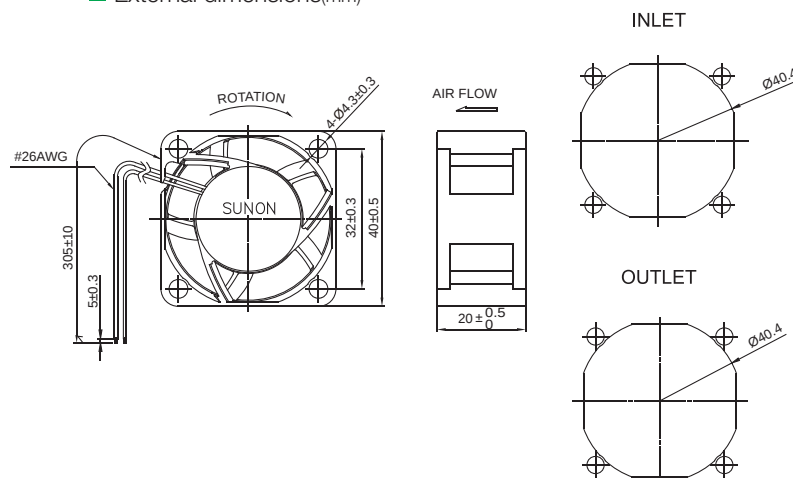

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com