

60x60x25 mm

16.0~27.0 CFM




■ Specification


	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
MF60251VX-10000-A99	●	12	130	1.56	5200	27.0	0.31	31.2	45.0	1
MF60251V1-10000-A99	●	12	75	0.90	4500	23.5	0.21	27.0	45.0	2
MF60251V2-10000-A99	●	12	72	0.87	3800	19.3	0.15	22.0	45.0	3
MF60251V3-10000-A99	●	12	44	0.53	3100	16.0	0.10	16.7	45.0	4
MF60252VX-10000-A99	●	24	80	1.92	5200	27.0	0.31	31.2	45.0	1
MF60252V1-10000-A99	●	24	50	1.20	4500	23.5	0.21	27.0	45.0	2
MF60252V2-10000-A99	●	24	30	0.72	3800	19.3	0.15	22.0	45.0	3
MF60252V3-10000-A99	●	24	22	0.53	3100	16.0	0.10	16.7	45.0	4
Model	○ 2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
EF60252S1-10000-A99	○	24	50	1.20	4500	23.5	0.21	27.0	45.0	2

■ Function (MF Series) R Type : F99 / F Type : G99
(EF Series) F Type : G99

■ Air Flow-Static Pressure Characteristics

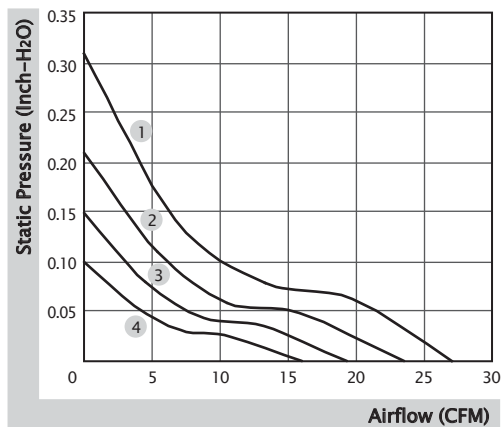

■ External Dimensions(mm)

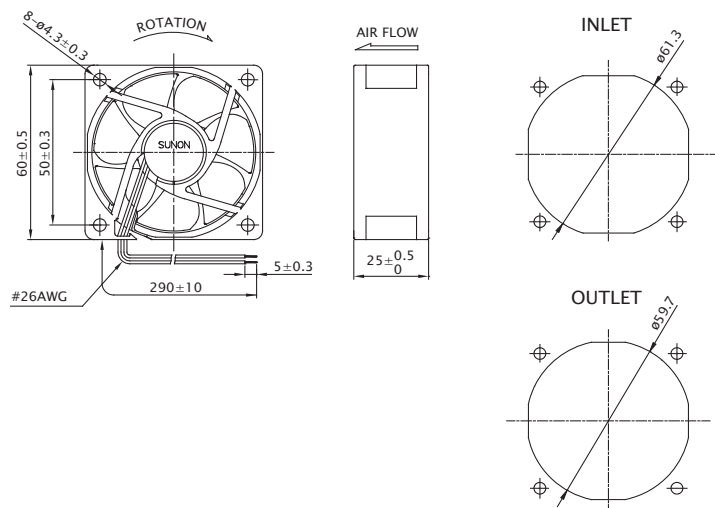

60x60x25 mm (GR487/IP68)

26.9~54.8 CFM




■ Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
GF60252BX-10000-ADP	☼	24	545	13.08	12900	54.8	1.44	55.4	84.0	1
GF60252B1-10000-ADP	☼	24	405	9.72	11500	48.4	1.21	53.2	84.0	2
GF60252B2-10000-ADP	☼	24	208	5.00	9000	36.5	0.79	47.2	84.0	3
GF60252B3-10000-ADP	☼	24	115	2.76	6450	26.9	0.42	38.0	84.0	4
GF60252BX-10000-AEP	☼	24	545	13.08	12900	54.8	1.44	55.4	84.0	1
GF60252B1-10000-AEP	☼	24	405	9.72	11500	48.4	1.21	53.2	84.0	2
GF60252B2-10000-AEP	☼	24	208	5.00	9000	36.5	0.79	47.2	84.0	3
GF60252B3-10000-AEP	☼	24	115	2.76	6450	26.9	0.42	38.0	84.0	4

■ Function (GR487) R Type : FDP / F Type : GDP / PWM : HDP, QDP, SDP
(IP68) R Type : FEP / F Type : GEP / PWM : HEP, QEP, SEP

■ Air Flow-Static Pressure Characteristics

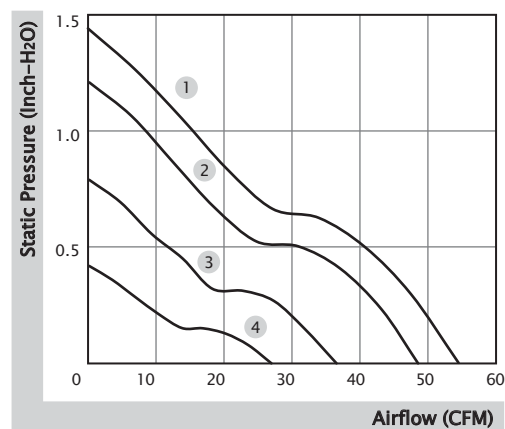

■ External Dimensions(mm)

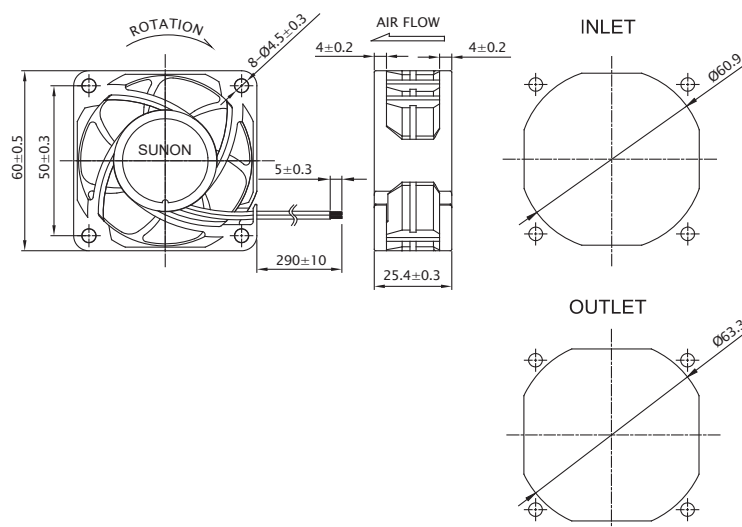

60x60x25 mm

29.0~40.0 CFM




■ Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
PF60251BX-10000-A99	☼	12	270	3.24	8300	40.0	0.66	46.0	65.0	1
PF60251B1-10000-A99	☼	12	195	2.34	7500	36.0	0.56	41.7	65.0	2
PF60251B2-10000-A99	☼	12	165	1.98	7000	31.5	0.50	40.7	65.0	3
PF60251B3-10000-A99	☼	12	118	1.42	6200	29.0	0.41	37.5	65.0	4
PF60252BX-10000-A99	☼	24	134	3.22	8300	40.0	0.66	46.0	65.0	1
PF60252B1-10000-A99	☼	24	107	2.57	7500	36.0	0.56	41.7	65.0	2
PF60252B2-10000-A99	☼	24	89	2.14	7000	31.5	0.50	40.7	65.0	3
PF60252B3-10000-A99	☼	24	65	1.56	6200	29.0	0.41	37.5	65.0	4

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

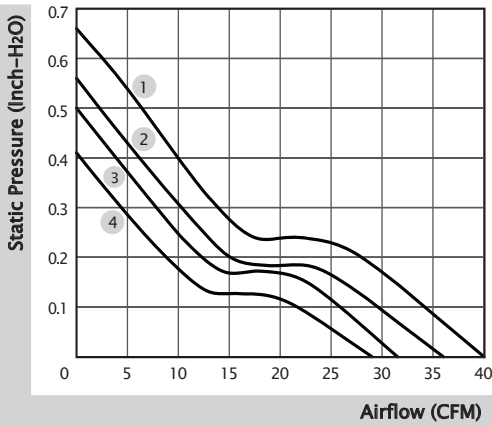

■ External Dimensions(mm)

