

70x70x15 mm

19.1~27.3 CFM




■ Specification


	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
MF70151V1-10000-A99	●	12	74	0.89	3,500	27.3	0.12	30.0	41.0	1
MF70151V2-10000-A99	●	12	51	0.62	3,000	23.1	0.09	25.6	41.0	2
MF70151V3-10000-A99	●	12	30	0.36	2,500	19.1	0.07	20.7	41.0	3

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

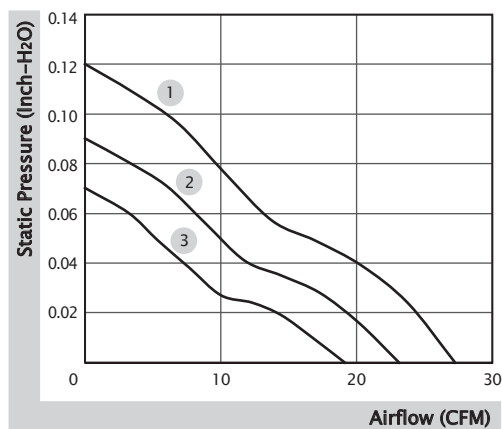

■ External Dimensions(mm)

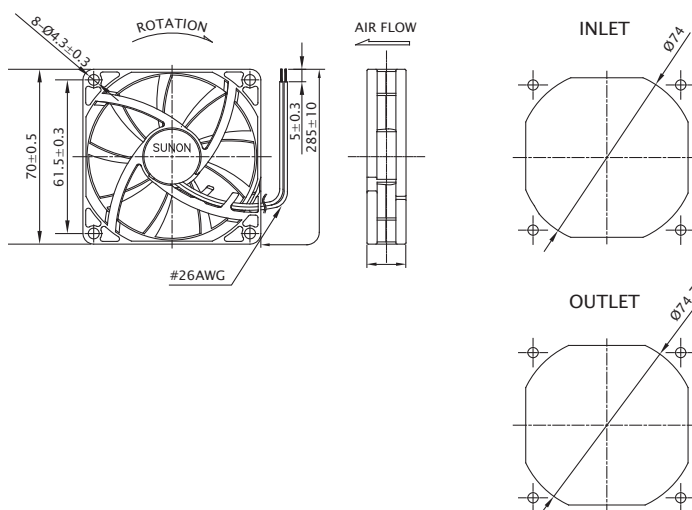

70x70x25 mm

40.0~49.0 CFM




■ Specification


	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
PMD2407PTV1-A GN	●	24	200	4.8	5100	49.0	0.36	44.0	90.0	1
PMD2407PTV2-A GN	●	24	160	3.8	4700	45.0	0.31	42.0	90.0	2
PMD2407PTV3-A GN	●	24	130	3.1	4200	40.0	0.25	38.0	90.0	3

■ Function R Type : (2).R.GN / F Type : (2).F.GN

■ Air Flow-Static Pressure Characteristics

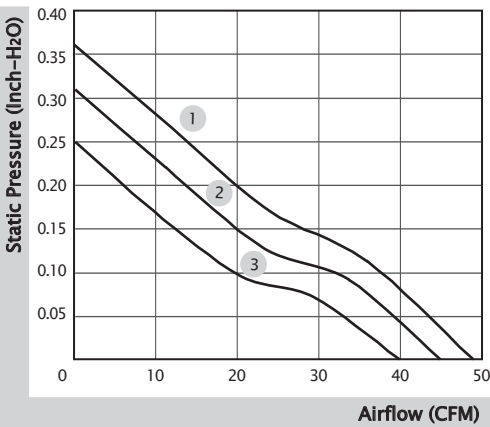

■ External Dimensions(mm)

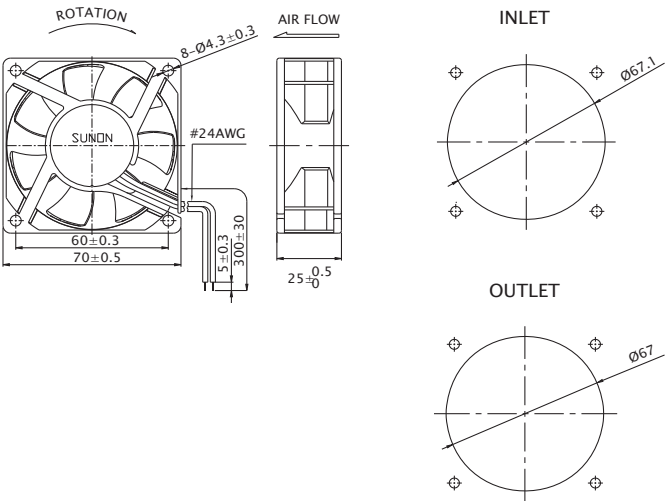

80x80x15 mm

30.0~37.0 CFM




■ Specification

	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
EF80151S1-10000-999	○	12	148	1.78	3500	37.0	0.17	32.9	67.0	1
EF80151S2-10000-999	○	12	105	1.26	3100	33.6	0.13	29.9	67.0	2
EF80151S3-10000-999	○	12	87	1.05	2800	30.0	0.11	26.5	67.0	3

■ Function F Type : C99

■ Air Flow-Static Pressure Characteristics

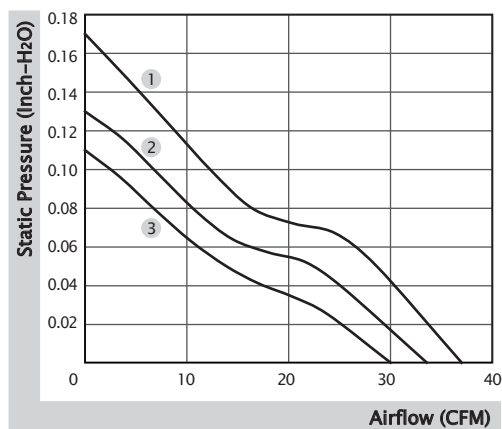

■ External Dimensions(mm)

