


40x40x56 mm

26.9~31.7 CFM




# ■ Specification


| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed       | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM)       | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PF40561BX-10000-A9H | ☉            | 12            | 1390          | 16.68             | 21500/18000 | 31.7    | 3.76                    | 65.9    | 87.0   | 1     |
| PF40561B1-10000-A9H | ☉            | 12            | 890           | 10.68             | 18000/15000 | 26.9    | 2.64                    | 62.3    | 87.0   | 2     |

■ Function R Type : F9H / F Type : G9H / PWM : H9H, Q9H, S9H

# ■ External dimensions(mm)

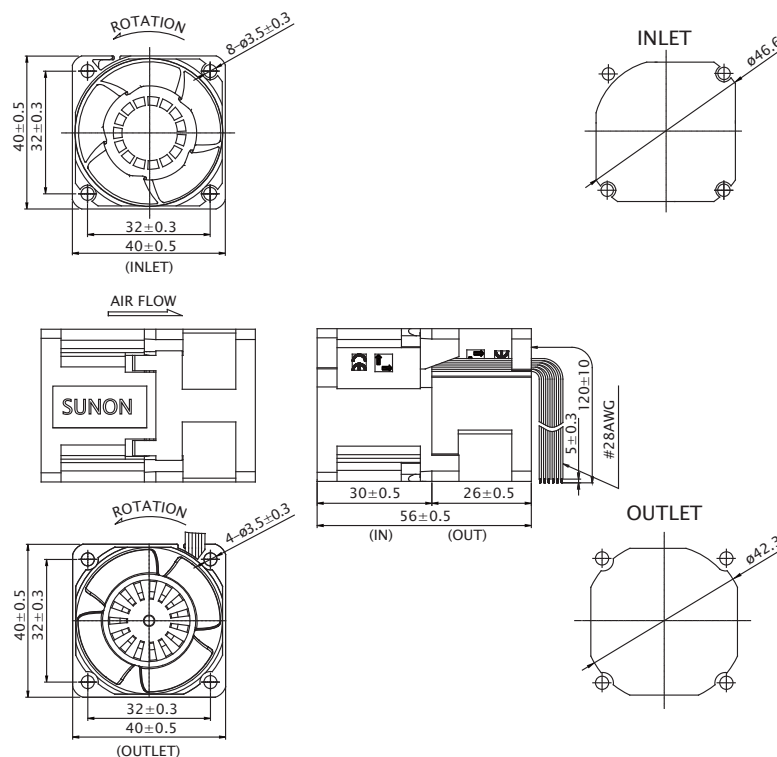

# ■ Air Flow-Static Pressure Characteristics

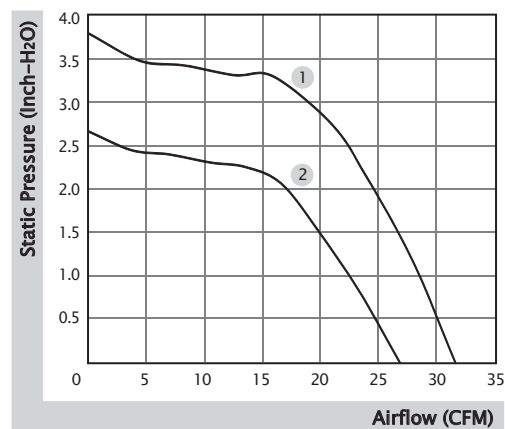

40x40x56 mm

19.7~25.0 CFM




■ Specification


| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed       | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM)       | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| VG40561BX-0000-A9H | ☉            | 12            | 1400          | 16.80             | 25500/22300 | 25.0    | 6.19                    | 65.0    | 87.0   | 1     |
| VG40561B1-0000-A9H | ☉            | 12            | 750           | 9.00              | 20400/17800 | 19.7    | 4.16                    | 62.5    | 87.0   | 2     |

■ Function    F Type : G9H   /   PWM : S9H

■ Air Flow-Static Pressure Characteristics

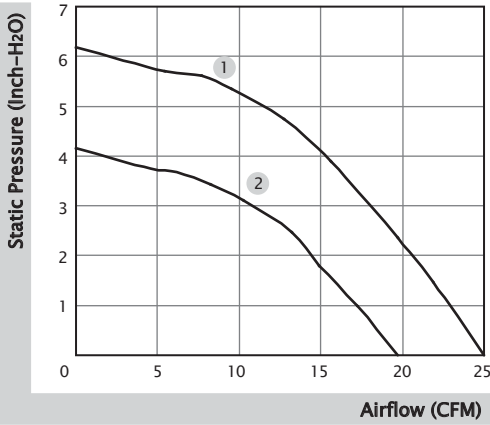

■ External Dimensions(mm)

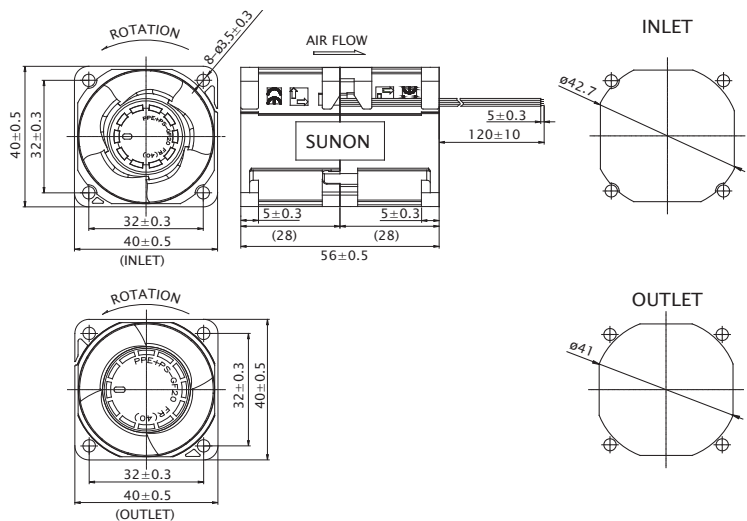

45x45x10 mm

9.4~12.4 CFM




# ■ Specification

|  | Bearing        | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|----------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO         | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MF45100V1-10000-A99                                                               | ●              | 5             | 205           | 1.03              | 6500  | 12.4    | 0.18                    | 32.5    | 16.0   | 1     |
| MF45100V2-10000-A99                                                               | ●              | 5             | 102           | 0.51              | 5000  | 9.4     | 0.12                    | 26.1    | 16.0   | 3     |
| MF45101V1-10000-A99                                                               | ●              | 12            | 100           | 1.20              | 6500  | 12.4    | 0.18                    | 32.5    | 16.0   | 1     |
| *MF45101V2-10000-A99                                                              | ●              | 12            | 47            | 0.57              | 5000  | 9.4     | 0.12                    | 26.1    | 16.0   | 3     |
| Model                                                                             | ○ 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EF45101S1-10000-999                                                               | ○              | 12            | 85            | 1.02              | 5700  | 10.8    | 0.16                    | 29.8    | 16.0   | 2     |
| EF45101S2-10000-999                                                               | ○              | 12            | 60            | 0.72              | 5000  | 9.4     | 0.12                    | 26.1    | 16.0   | 3     |

■ Function (MF Series) R Type : F99 / F Type : G99 / PWM : H99, Q99, S99  
(EF Series) F Type : C99

\*MF45101V2-10000-A99 only available : R Type : F99 / F Type : G99

# ■ Air Flow-Static Pressure Characteristics

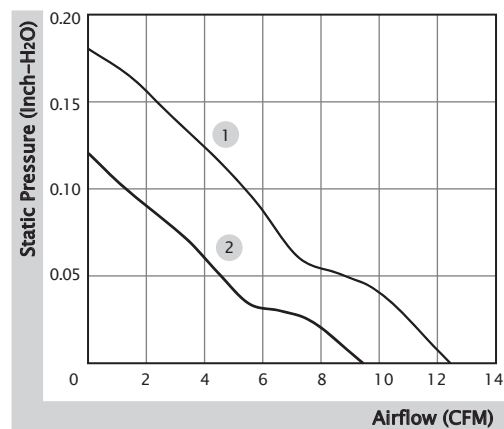

# ■ External Dimensions(mm)

