

60x60x25 mm

29.0~40.0 CFM




■ Specification


| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PF60251BX-10000-A99 | ☼            | 12            | 270           | 3.24              | 8300  | 40.0    | 0.66                    | 46.0    | 65.0   | 1     |
| PF60251B1-10000-A99 | ☼            | 12            | 195           | 2.34              | 7500  | 36.0    | 0.56                    | 41.7    | 65.0   | 2     |
| PF60251B2-10000-A99 | ☼            | 12            | 165           | 1.98              | 7000  | 31.5    | 0.50                    | 40.7    | 65.0   | 3     |
| PF60251B3-10000-A99 | ☼            | 12            | 118           | 1.42              | 6200  | 29.0    | 0.41                    | 37.5    | 65.0   | 4     |
| PF60252BX-10000-A99 | ☼            | 24            | 134           | 3.22              | 8300  | 40.0    | 0.66                    | 46.0    | 65.0   | 1     |
| PF60252B1-10000-A99 | ☼            | 24            | 107           | 2.57              | 7500  | 36.0    | 0.56                    | 41.7    | 65.0   | 2     |
| PF60252B2-10000-A99 | ☼            | 24            | 89            | 2.14              | 7000  | 31.5    | 0.50                    | 40.7    | 65.0   | 3     |
| PF60252B3-10000-A99 | ☼            | 24            | 65            | 1.56              | 6200  | 29.0    | 0.41                    | 37.5    | 65.0   | 4     |

■ Function    R Type : F99   /   F Type : G99   /   PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

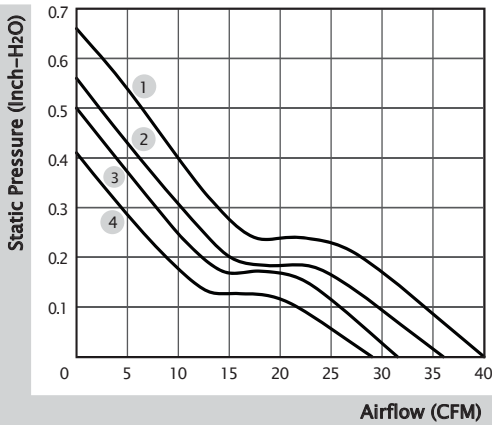

■ External Dimensions(mm)

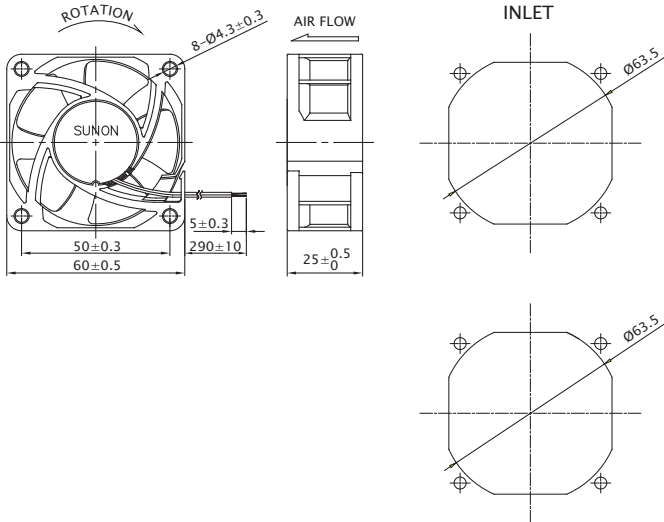

60x60x25 mm

29.0~40.0 CFM




## ■ Specification


|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PF60251VX-10000-A99                                                               | ●       | 12            | 340           | 4.08              | 8300  | 40.0    | 0.66                    | 46.0    | 65.0   | 1     |
| PF60251V1-10000-A99                                                               | ●       | 12            | 258           | 3.10              | 7500  | 36.0    | 0.56                    | 41.7    | 65.0   | 2     |
| PF60251V2-10000-A99                                                               | ●       | 12            | 215           | 2.58              | 7000  | 31.5    | 0.50                    | 40.7    | 65.0   | 3     |
| PF60251V3-10000-A99                                                               | ●       | 12            | 160           | 1.92              | 6200  | 29.0    | 0.41                    | 37.5    | 65.0   | 4     |
| PF60252VX-10000-A99                                                               | ●       | 24            | 160           | 3.84              | 8300  | 40.0    | 0.66                    | 46.0    | 64.0   | 1     |
| PF60252V1-10000-A99                                                               | ●       | 24            | 126           | 3.03              | 7500  | 36.0    | 0.56                    | 41.7    | 64.0   | 2     |
| PF60252V2-10000-A99                                                               | ●       | 24            | 105           | 2.52              | 7000  | 31.5    | 0.50                    | 40.7    | 64.0   | 3     |
| PF60252V3-10000-A99                                                               | ●       | 24            | 81            | 1.95              | 6200  | 29.0    | 0.41                    | 37.5    | 64.0   | 4     |

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

## ■ Air Flow-Static Pressure Characteristics

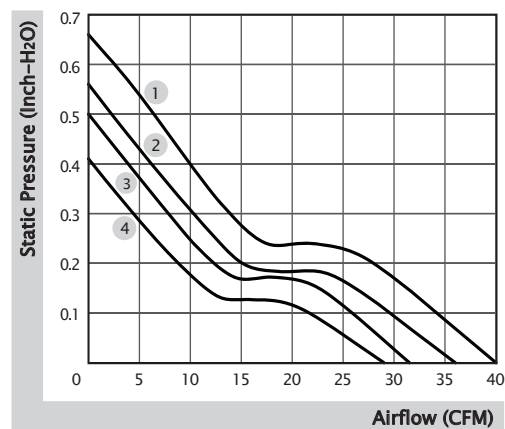

## ■ External Dimensions(mm)

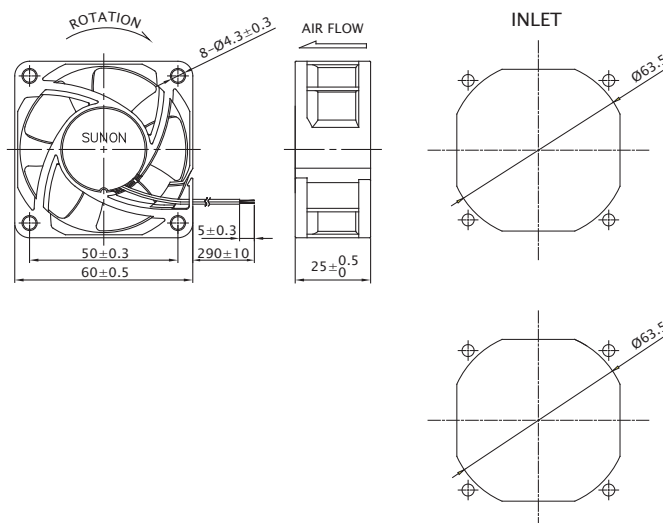

60x60x25 mm

13.8 CFM




■ Specification

|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| HA60251V4-10000-A99                                                               | ●       | 12            | 20            | 0.24              | 2500  | 13.8    | 0.06                    | 10.7    | 45.0   | 1     |

■ Function    F Type : G99

■ Air Flow-Static Pressure Characteristics

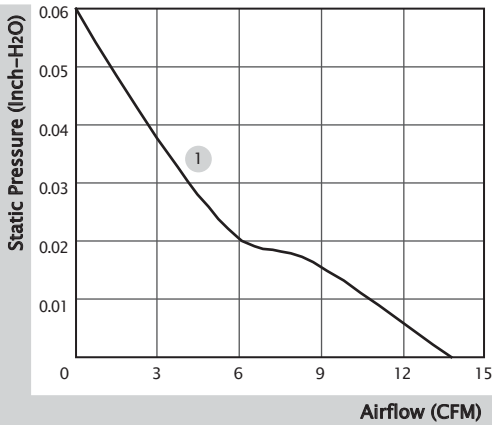

■ External Dimensions(mm)

