

60x60x38 mm

41.4~75.2 CFM




■ Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
PF60381BX-10000-A9H	☼	12	2500	30.00	16500	75.2	3.57	67.0	127.0	1
PF60381B1-10000-A9H	☼	12	1200	14.40	13200	60.6	2.30	61.2	127.0	2
PF60382BX-10000-A9H	☼	24	1130	27.12	16500	75.2	3.57	67.0	65.0	1
PF60382B1-10000-A9H	☼	24	550	13.20	13200	60.6	2.30	61.2	65.0	2
PF60382B2-10000-A9H	☼	24	290	6.96	10300	56.5	1.28	56.0	65.0	3
PF60382B3-10000-A9H	☼	24	135	3.24	7400	41.4	0.69	47.0	65.0	4

■ Function R Type : F9H / F Type : G9H / PWM : H9H, Q9H, S9H

■ Air Flow-Static Pressure Characteristics

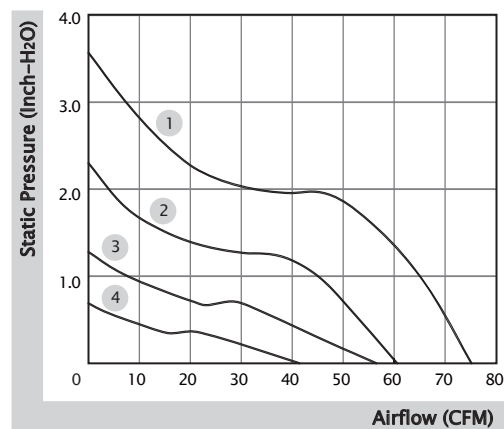

■ External Dimensions(mm)

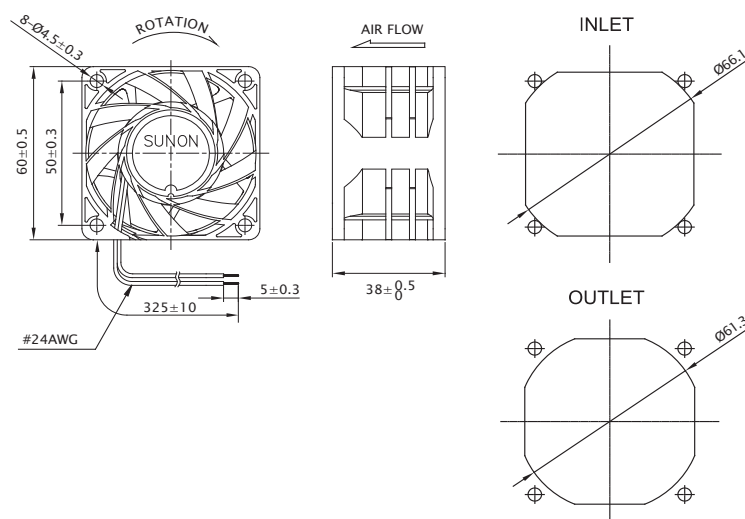

60x60x38 mm

54.1~67.8 CFM




■ Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
VF60381BX-0000-A9H	☼	12	1900	22.80	22800	67.8	4.84	64.1	120.0	1
VF60381B1-0000-A9H	☼	12	1000	12.00	18300	54.1	4.23	60.9	120.0	2
VF60384BX-10000-A9H	☼	48	460	22.08	22800	67.8	4.84	64.1	120.0	1
VF60384B1-10000-A9H	☼	48	265	12.72	18300	54.1	4.23	60.9	120.0	2

■ Function (12V) R Type : F9H / F Type : G9H / PWM : H9H, Q9H, S9H
(48V) R Type : F9H / F Type : G9H / PWM : Q9H, S9H

■ Air Flow-Static Pressure Characteristics

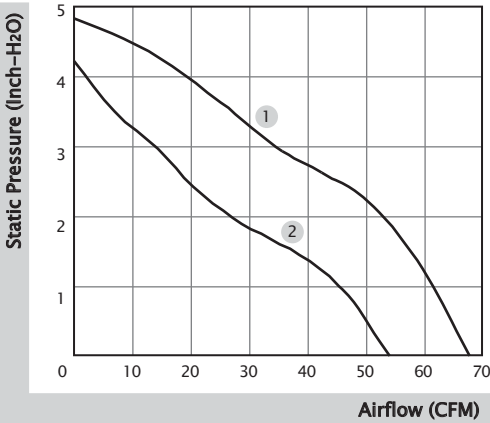

■ External Dimensions(mm)

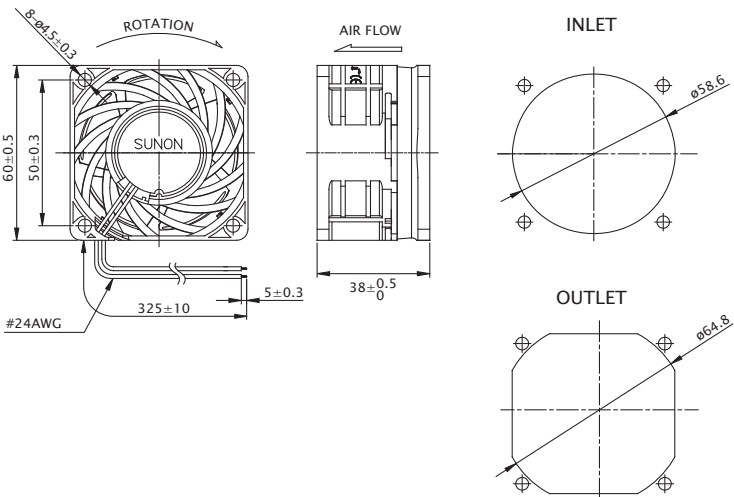

60x60x56 mm

58.5~72.9 CFM




■ Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
PF60561BX-0000-A9H	☉	12	2500	30.0	15300/14300	72.9	3.44	71.7	172.0	1
PF60561B1-0000-A9H	☉	12	1400	16.8	12300/11500	58.5	2.35	67.0	172.0	2

■ Function R Type : F9H / F Type : G9H / PWM : H9H, Q9H, S9H

■ Air Flow-Static Pressure Characteristics

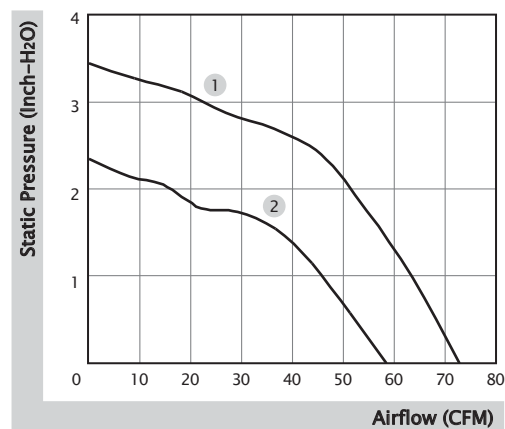

■ External Dimensions(mm)

