

120x120x32 mm

31.4~35.9 CFM




### ■ Specification



| Model                | Bearing       | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|----------------------|---------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                      | 2 BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PMB1212PLB2-A (2).GN | ☯             | 12            | 820           | 9.8               | 2500  | 35.9    | 0.89                    | 53.8    | 250.0  | 1     |
| PMB1212PLB3-A (2).GN | ☯             | 12            | 450           | 5.4               | 2100  | 31.4    | 0.64                    | 49.6    | 250.0  | 2     |

■ Function    R Type : (2).R.GN    /    F Type : (2).F.GN

### ■ Air Flow–Static Pressure Characteristics

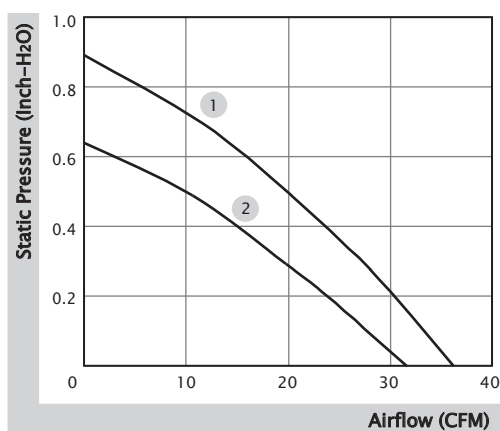

■ External dimensions(mm)

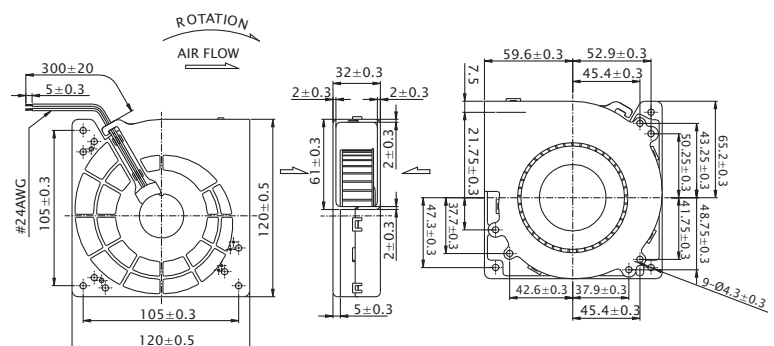

## Notes

[illegible]



Beijing Hengrui Mechanical and Electrical Equipment Co., Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

**SUNON®**

