

80x80x38 mm

59.5~84.1 CFM




#### ■ Specification


| Model                | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|----------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                      | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PMD1208PMB1-A (2).GN | ☼            | 12            | 760           | 9.1               | 5700  | 84.1    | 0.74                    | 55.2    | 175.0  | 1     |
| PMD1208PMB2-A (2).GN | ☼            | 12            | 530           | 6.4               | 4900  | 74.5    | 0.57                    | 51.6    | 175.0  | 2     |
| PMD1208PMB3-A (2).GN | ☼            | 12            | 370           | 4.4               | 4200  | 59.5    | 0.43                    | 47.3    | 175.0  | 3     |
| PMD2408PMB1-A (2).GN | ☼            | 24            | 400           | 9.6               | 5700  | 84.1    | 0.74                    | 55.2    | 175.0  | 1     |
| PMD2408PMB2-A (2).GN | ☼            | 24            | 300           | 7.2               | 4900  | 74.5    | 0.57                    | 51.6    | 175.0  | 2     |
| PMD2408PMB3-A (2).GN | ☼            | 24            | 200           | 4.8               | 4200  | 59.5    | 0.43                    | 47.3    | 175.0  | 3     |

■ Function R Type : (2).R.GN / F Type : (2).F.GN

#### ■ Air Flow-Static Pressure Characteristics

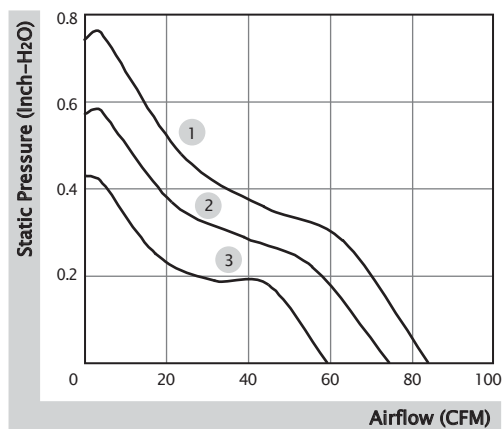

#### ■ External Dimensions(mm)

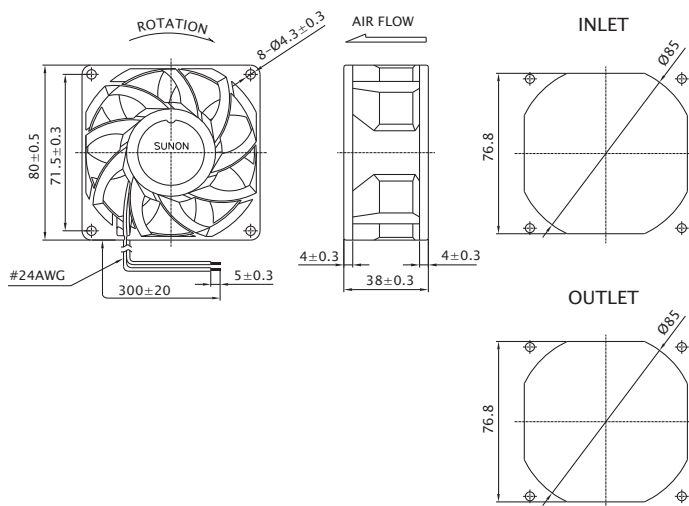

80x80x80 mm

122.0~151.5 CFM




■ Specification


| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed       | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM)       | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PF80801BX-0000-A9H | ☉            | 12            | 6800          | 81.60             | 15600/14100 | 151.5   | 5.44                    | 80.4    | 464.0  | 1     |
| PF80801B1-0000-A9H | ☉            | 12            | 3500          | 42.00             | 12600/11300 | 122.0   | 3.66                    | 75.1    | 464.0  | 2     |

■ Function    F Type : G9H   /   PWM : S9H

■ Air Flow-Static Pressure Characteristics

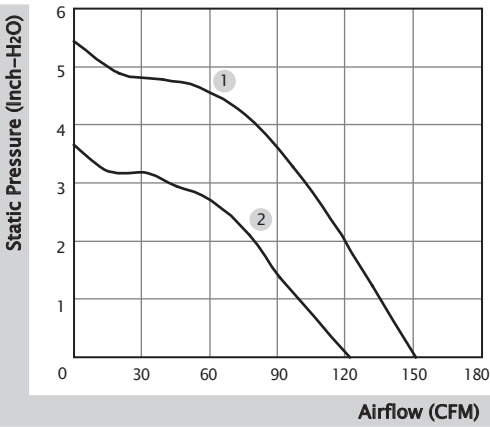

■ External Dimensions(mm)

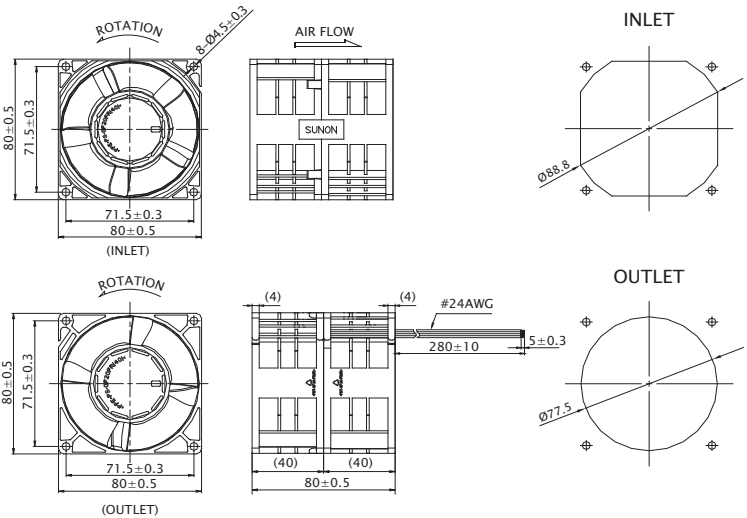

92x92x25 mm

65.0~75.0 CFM




# ■ Specification

|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PF92251V1-10000-A99                                                               | ●       | 12            | 370           | 4.44              | 4500  | 75.0    | 0.35                    | 45.5    | 106.0  | 1     |
| PF92251V2-10000-A99                                                               | ●       | 12            | 280           | 3.36              | 4200  | 70.0    | 0.30                    | 43.7    | 106.0  | 2     |
| PF92251V3-10000-A99                                                               | ●       | 12            | 230           | 2.76              | 3900  | 65.0    | 0.25                    | 41.6    | 106.0  | 3     |
| PF92252V1-10000-A99                                                               | ●       | 24            | 210           | 5.04              | 4500  | 75.0    | 0.35                    | 45.5    | 106.0  | 1     |
| PF92252V2-10000-A99                                                               | ●       | 24            | 145           | 3.48              | 4200  | 70.0    | 0.30                    | 43.7    | 106.0  | 2     |
| PF92252V3-10000-A99                                                               | ●       | 24            | 126           | 3.03              | 3900  | 65.0    | 0.25                    | 41.6    | 106.0  | 3     |

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

## ■ Air Flow-Static Pressure Characteristics

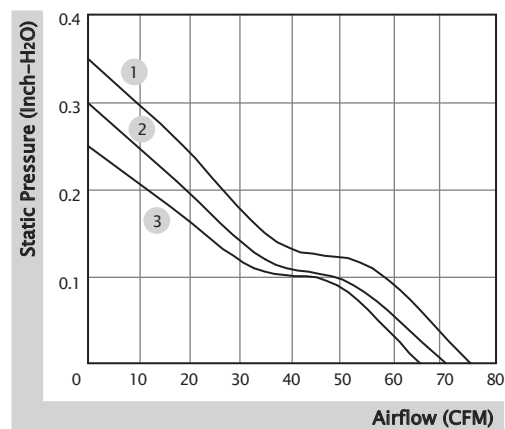

## ■ External Dimensions(mm)

