

# UF15KC series


**(172 x 150 x 55 mm)**

6.77 x 5.91 x 2.17 inches

Operating voltage: 115 or 230 VAC

 Construction: aluminum die cast frame;  
UL94V-0 PBT impeller


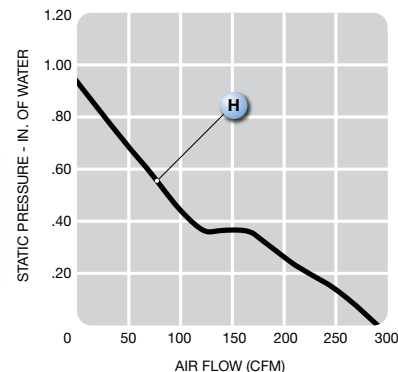
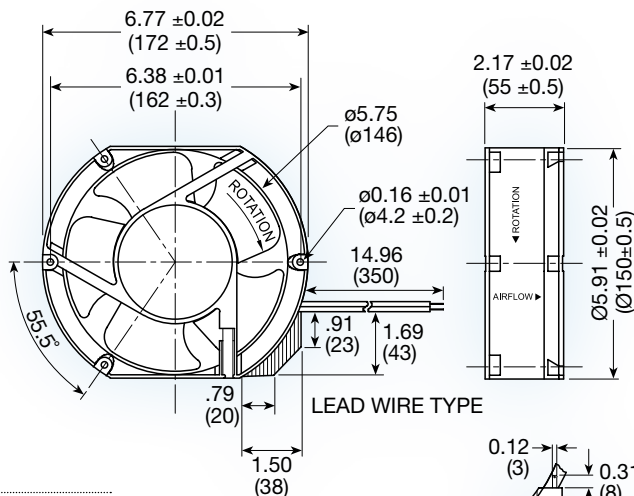
Bearing option: ball bearing

Motor: permanent split capacitor

Air Flow: exhaust over struts

Connection: terminal or 22 AWG lead wire

Protection: thermal

 Option: dual voltage 115/130VAC; IP55;  
IP55 + salt fog


| Model No.    | Rated Voltage<br>V | Freq.<br>HZ | Input Power<br>W | Rated Cur.<br>A | Locked Cur.<br>A | Speed<br>RPM | Air Volume           |     | Max. Static Pressure (H <sub>2</sub> O) |      | Sound Noise<br>dbA | Weight<br>kg |
|--------------|--------------------|-------------|------------------|-----------------|------------------|--------------|----------------------|-----|-----------------------------------------|------|--------------------|--------------|
|              |                    |             |                  |                 |                  |              | M <sup>3</sup> /Min. | CFM | MM                                      | INCH |                    |              |
| UF15KC12-__H | 115                | 60          | 38               | 0.34            | 0.76             | 3,400        | 8.3                  | 293 | 23                                      | 0.90 | 60                 | 1.05         |
| UF15KC23-__H | 230                | 60          | 38               | 0.17            | 0.38             | 3,400        | 8.3                  | 293 | 23                                      | 0.90 | 60                 | 1.05         |