



UF15KM series


(172 x 150 x 55 mm)


6.77 x 5.91 x 2.17 inches

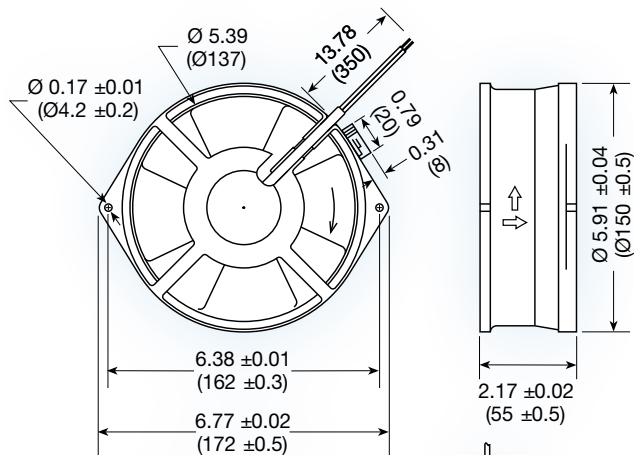

LEAD WIRE TYPE



TERMINAL TYPE

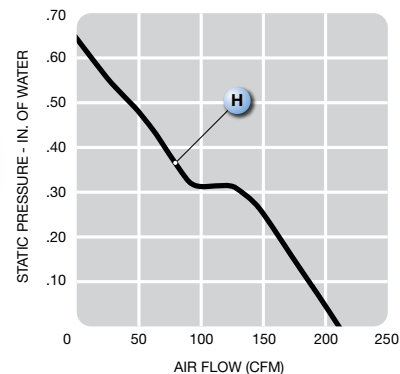
Features: high temp operating temperature range -40°C ~ 90°C

Operating voltage: 115 or 230 VAC

 Construction: aluminum die cast frame;
metal Impeller

Bearing option: ball bearing

Motor: shaded pole

Air Flow: exhaust over struts

Connection: terminal or 22 AWG lead wire

Protection: thermal

Option: tachometer output

 Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd
 +86 10-62547612
 zhangyu@bjhengrui.cn
 en.bjhengrui.com

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight kg
							M ³ /Min.	CFM	MM	INCH		
UF15KM12-__H	115	60	42	0.47	0.75	3,250	6.5	230	16	0.63	53	1.10
UF15KM23-__H	230	60	42	0.23	0.37	3,250	6.5	230	16	0.63	53	1.10