
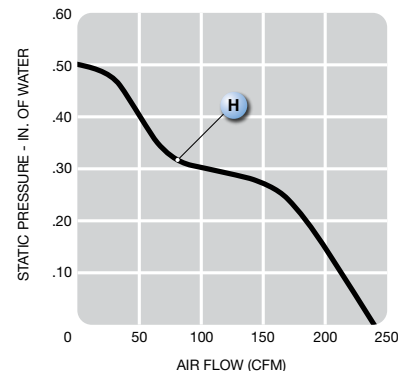


UF15KMR series

**(172 x 150 x 55 mm)**

6.77 x 5.91 x 2.17 inches

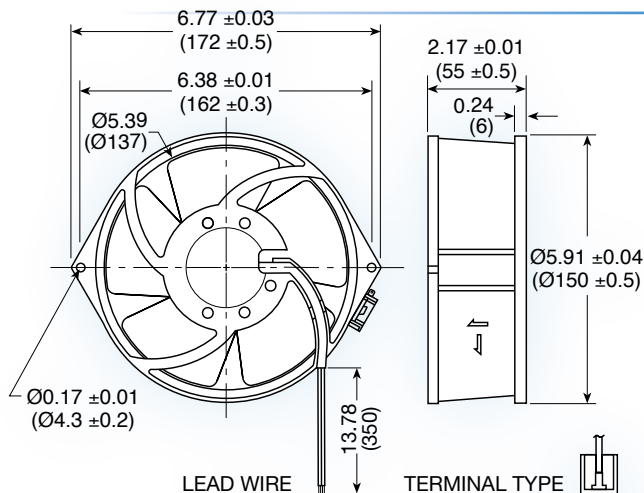

Features: high temp -40°C ~ 90°C
operating temperature

Operating voltage: 115 or 230 VAC

Construction: aluminum die cast frame;
metal impeller

Bearing option: ball bearing with high temp
lubricant

Motor: shaded pole - Class F insulation

Air Flow: intake over struts

Connection: terminal or 22 AWG lead wire

Protection: thermal

Beijing Hengrui Mechanical and Electrical Equipment Co., Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight kg
							M ³ /Min.	CFM	MM	INCH		
UF15KMR12-__H	115	60	45	0.51	0.80	3,150	7.2	255	12.5	0.50	61	1.10
UF15KMR23-__H	230	60	45	0.25	0.38	3,150	7.2	255	12.5	0.50	61	1.10