

UF15PC series



(172 x 150 x 51 mm)

6.77 x 5.91 x 2.0 inches

Operating voltage: 115 or 230 VAC

Construction: aluminum die cast frame;
UL94V-0 PBT impeller

Bearing option: ball bearing

Motor: permanent split capacitor



Air Flow: exhaust over struts

Connection: terminal or 22 AWG lead wire

Protection: thermal

Option: dual voltage 115/130VAC; IP55;
IP55 + salt fog, tachometer output

Beijing Hengrui Mechanical and Electrical Equipment Co., Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

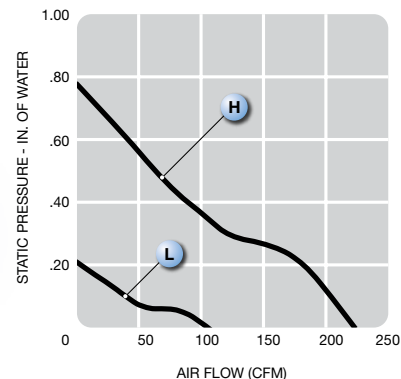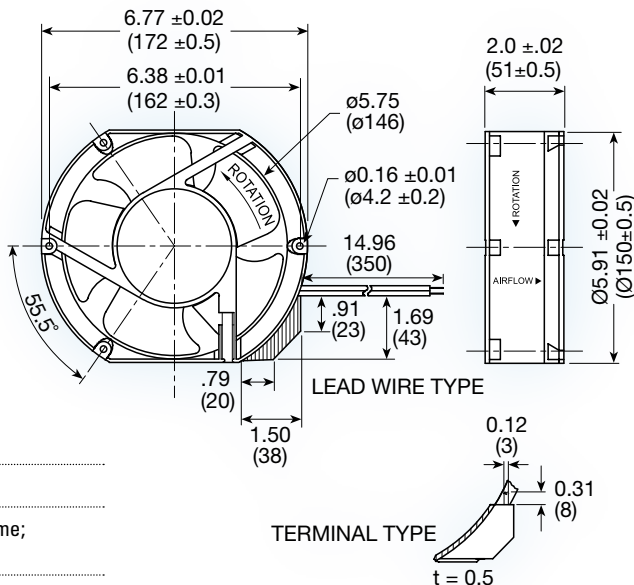

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight kg
							M ³ /Min.	CFM	MM	INCH		
UF15PC12 - __H	115	60	31	0.25	0.43	3,400	6.4	226	20.0	0.79	58	0.80
UF15PC23 - __H	230	60	29	0.12	0.19	3,400	6.4	226	20.0	0.79	58	0.80
UF15PC12 - __L	115	60	31	0.15	0.20	1,700	3.0	106	5.5	0.22	37	0.80
UF15PC23 - L	230	60	29	0.07	0.09	1,700	3.0	106	5.5	0.22	37	0.80