



# UF200BMA Series

Size : 225 x 225 x 80  
Unit : mm

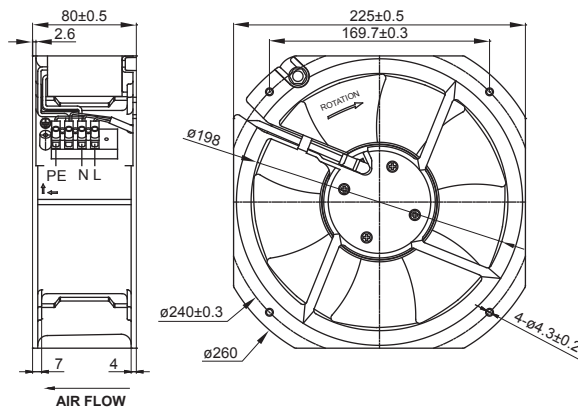

(Axial Fan)

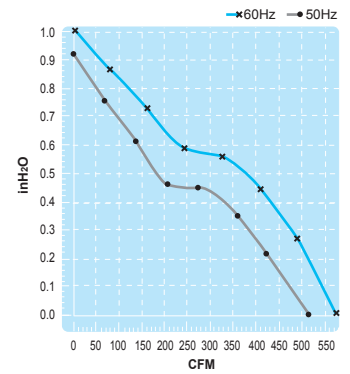



**Thermally-Protected**




| Spec.<br>Model  | Rated<br>Voltage<br>V | Frequency<br>Hz | Input<br>Power<br>W | Rated<br>Current<br>A | Locked<br>Current<br>A | Speed<br>RPM | Maximum<br>Air Flow<br>m <sup>3</sup> /min. | Maximum<br>Air Flow<br>CFM | Maximum<br>Pressure<br>mmH <sub>2</sub> O | Maximum<br>Pressure<br>InchH <sub>2</sub> O | Capacitor<br>μF/VDB | Noise<br>dB | Weight<br>kg |
|-----------------|-----------------------|-----------------|---------------------|-----------------------|------------------------|--------------|---------------------------------------------|----------------------------|-------------------------------------------|---------------------------------------------|---------------------|-------------|--------------|
| UF200BMA11H2C2A | 115                   | 50              | 73                  | 0.75                  | 1.30                   | 2700         | 14.7                                        | 520                        | 23.3                                      | 0.92                                        | 8/250               | 65          | 2.4          |
|                 |                       | 60              | 75                  | 0.66                  | 1.40                   | 3100         | 16.5                                        | 580                        | 25.4                                      | 1.00                                        |                     | 68          |              |
| UF200BMA23H2C2A | 230                   | 50              | 72                  | 0.38                  | 0.62                   | 2700         | 14.7                                        | 520                        | 23.3                                      | 0.92                                        | 2/450               | 65          | 2.4          |
|                 |                       | 60              | 77                  | 0.34                  | 0.63                   | 3100         | 16.5                                        | 580                        | 25.4                                      | 1.00                                        |                     | 68          |              |

# UF180BAB Series

Size : Ø180 x 63.5  
Unit : mm

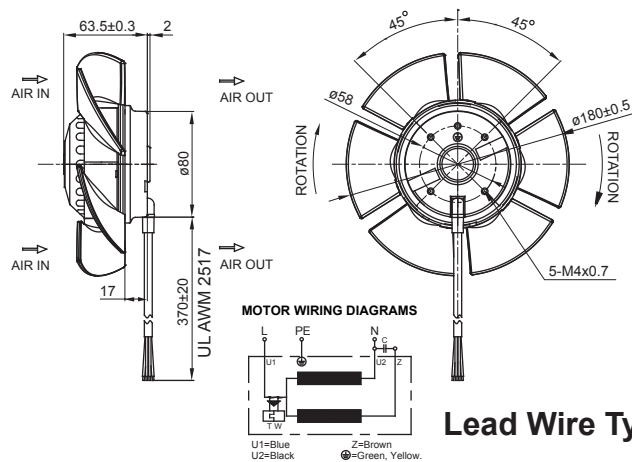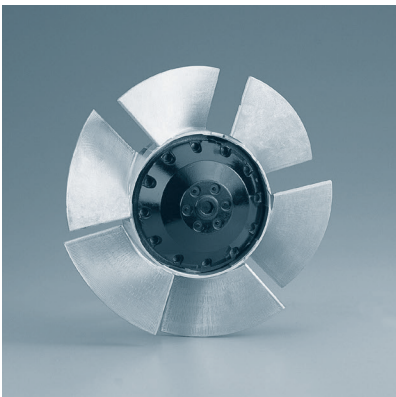

(Axial Fan)

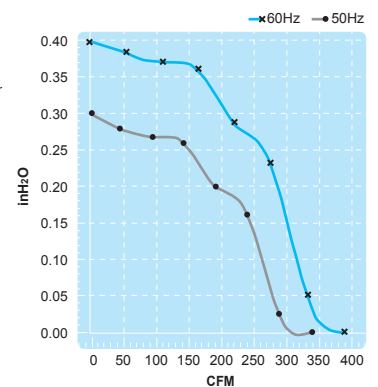

**Thermally-Protected**

**Lead Wire Type**



| Spec.<br>Model  | Rated<br>Voltage<br>V | Frequency<br>Hz | Input<br>Power<br>W | Rated<br>Current<br>A | Locked<br>Current<br>A | Speed<br>RPM | Maximum<br>Air Flow<br>m <sup>3</sup> /min. | Maximum<br>Air Flow<br>CFM | Maximum<br>Pressure<br>mmH <sub>2</sub> O | Maximum<br>Pressure<br>InchH <sub>2</sub> O | Capacitor<br>μF/VDB | Noise<br>dB | Weight<br>kg |
|-----------------|-----------------------|-----------------|---------------------|-----------------------|------------------------|--------------|---------------------------------------------|----------------------------|-------------------------------------------|---------------------------------------------|---------------------|-------------|--------------|
| UF180BAB11H1C2A | 115                   | 50              | 76                  | 0.70                  | 1.23                   | 2750         | 9.50                                        | 335                        | 7.50                                      | 0.3                                         | 10/250              | 62          | 1.2          |
|                 |                       | 60              | 75                  | 0.71                  | 1.23                   | 3100         | 11.0                                        | 388                        | 10.0                                      | 0.4                                         |                     | 65          |              |
| UF180BAB23H1C2A | 230                   | 50              | 76                  | 0.35                  | 0.54                   | 2750         | 9.50                                        | 335                        | 7.50                                      | 0.3                                         | 2/450               | 62          | 1.2          |
|                 |                       | 60              | 75                  | 0.40                  | 0.54                   | 3100         | 11.0                                        | 388                        | 10.0                                      | 0.4                                         |                     | 65          |              |



# EC FAN

# UFT200BMB Series

Size :  $\varnothing 250 \times 76.1$   
Unit : mm

## (Axial Fan)

①H: 2200RPM ②L: 1400RPM

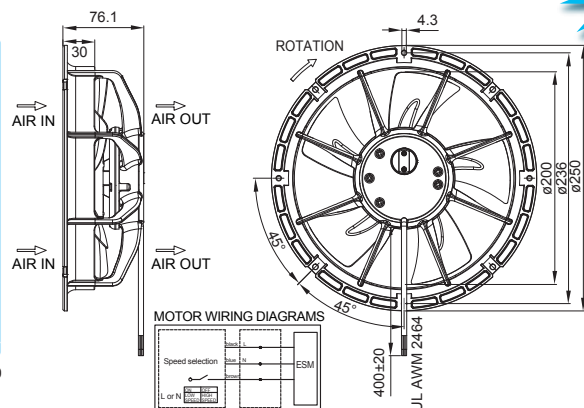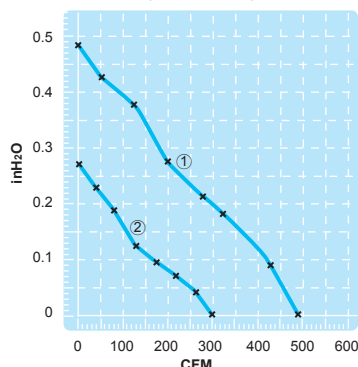

## Lead Wire Type

## Electronically-Protected

| Spec.            | Rated Voltage | Frequency | Input Power | Rated Current | Locked Current | Speed | Maximum Air Flow     | Maximum Air Flow | Maximum Pressure   | Maximum Pressure     | Noise | Weight |
|------------------|---------------|-----------|-------------|---------------|----------------|-------|----------------------|------------------|--------------------|----------------------|-------|--------|
| Model            | V             | Hz        | W           | A             | A              | RPM   | m <sup>3</sup> /min. | CFM              | mmH <sub>2</sub> O | InchH <sub>2</sub> O | dB    | kg     |
| UFT200BMB11H1D4A | 115           | 50/60     | 26.0        | 0.40          | 0.10           | 2200  | 13.0                 | 460              | 11.7               | 0.46                 | 55    | 1      |
|                  |               | 50/60     | 8.1         | 0.13          | 0.10           | 1400  | 8.2                  | 290              | 7.1                | 0.28                 | 44    |        |
| UFT200BMB23H1D4A | 230           | 50/60     | 27.0        | 0.24          | 0.10           | 2200  | 13.0                 | 460              | 11.7               | 0.46                 | 55    | 1      |
|                  |               | 50/60     | 8.5         | 0.08          | 0.10           | 1400  | 8.2                  | 290              | 7.1                | 0.28                 | 44    |        |



# EC FAN

# UFT200BPB Series

Size :  $\varnothing 250 \times 76.6$   
Unit : mm

## (Axial Fan)

①H: 2200RPM ②L: 1400RPM

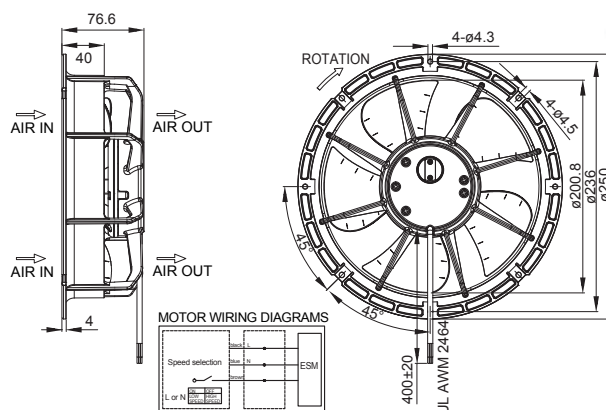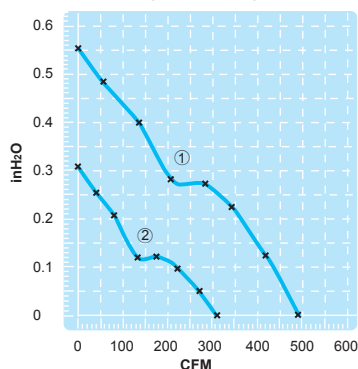

## Lead Wire Type


## Electronically-Protected

| Spec.            | Rated Voltage | Frequency | Input Power | Rated Current | Locked Current | Speed | Maximum Air Flow     | Maximum Air Flow | Maximum Pressure   | Maximum Pressure     | Noise | Weight |
|------------------|---------------|-----------|-------------|---------------|----------------|-------|----------------------|------------------|--------------------|----------------------|-------|--------|
| Model            | V             | Hz        | W           | A             | A              | RPM   | m <sup>3</sup> /min. | CFM              | mmH <sub>2</sub> O | InchH <sub>2</sub> O | dB    | kg     |
| UFT200BPB11H1D4A | 115           | 50/60     | 26.0        | 0.40          | 0.10           | 2200  | 14.0                 | 495              | 14.0               | 0.55                 | 56    | 0.92   |
|                  |               | 50/60     | 8.1         | 0.13          | 0.10           | 1400  | 8.9                  | 315              | 8.1                | 0.32                 | 47    |        |
| UFT200BPB23H1D4A | 230           | 50/60     | 27.0        | 0.24          | 0.20           | 2200  | 14.0                 | 495              | 14.0               | 0.55                 | 56    | 0.92   |
|                  |               | 50/60     | 8.5         | 0.08          | 0.20           | 1400  | 8.9                  | 315              | 8.1                | 0.32                 | 47    |        |


# UFT25GBP Series

EC FAN

Size :  $\varnothing 254 \times 89$   
Unit : mm

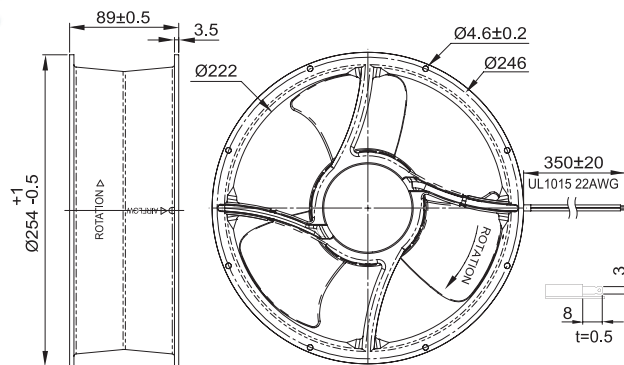

(Axial Fan)



Electronically-Protected

Terminal or Lead Wire Type




| Spec.           | Rated Voltage | Frequency | Input Power            | Rated Current              | Locked Current             | Speed | Maximum Air Flow     | Maximum Air Flow | Maximum Pressure   | Maximum Pressure     | Noise | Weight |
|-----------------|---------------|-----------|------------------------|----------------------------|----------------------------|-------|----------------------|------------------|--------------------|----------------------|-------|--------|
| Model           | V             | Hz        | W                      | A                          | A                          | RPM   | m <sup>3</sup> /min. | CFM              | mmH <sub>2</sub> O | InchH <sub>2</sub> O | dB    | kg     |
| UFT25GBP11H1D8A | 115           | 50/60     | 75                     | 1.05                       | 0.15                       | 2750  | 23.5                 | 830              | 30.5               | 1.20                 | 70    | 2.09   |
| UFT25GBP23H1D8A | 230           | 50/60     | 72                     | 0.64                       | 0.15                       | 2750  | 23.5                 | 830              | 30.5               | 1.20                 | 70    | 2.09   |
| UFT25GBP0AL1D8A | 115~230       | 50/60     | 21 (115V)<br>22 (230V) | 0.35 (115V)<br>0.21 (230V) | 0.14 (115V)<br>0.16 (230V) | 1700  | 14.2                 | 500              | 12.2               | 0.48                 | 56    | 2.09   |


# UFT92ABPB Series

EC FAN

Size : 92 x 92 x 38  
Unit : mm

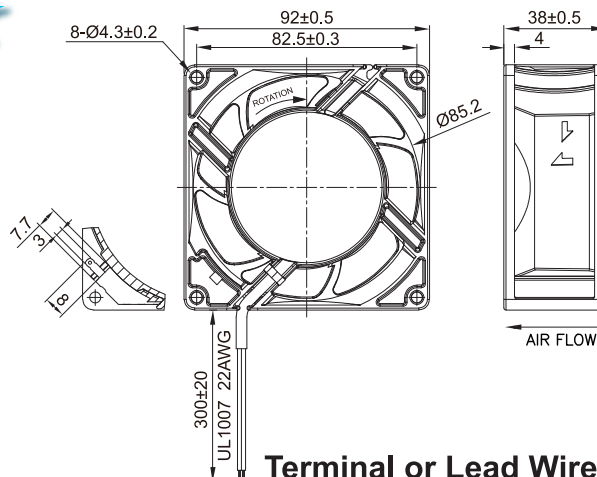

(Axial Fan)

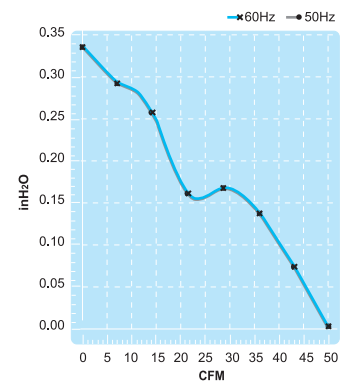

Electronically-Protected

Terminal or Lead Wire Type



| Spec.            | Rated Voltage | Frequency | Input Power              | Rated Current              | Locked Current             | Speed | Maximum Air Flow     | Maximum Air Flow | Maximum Pressure   | Maximum Pressure     | Noise | Weight |
|------------------|---------------|-----------|--------------------------|----------------------------|----------------------------|-------|----------------------|------------------|--------------------|----------------------|-------|--------|
| Model            | V             | Hz        | W                        | A                          | A                          | RPM   | m <sup>3</sup> /min. | CFM              | mmH <sub>2</sub> O | InchH <sub>2</sub> O | dB    | kg     |
| UFT92ABPB0AH1D4A | 115~230       | 50/60     | 4.8 (115V)<br>5.2 (230V) | 0.08 (115V)<br>0.05 (230V) | 0.07 (115V)<br>0.05 (230V) | 3850  | 1.4                  | 50               | 8.4                | 0.33                 | 43    | 0.225  |