

SUNON

SPECIFICATION FOR APPROVAL

FOR REFERENCE

CUSTOMER :
DESCRIPTION : AXIAL AC FAN
DIMENSIONS : 171X151X51 mm
M O D E L : A2175-HBL
P/N : TC.GN
SUNON SPEC. NO. : A17001730G-C1
CUSTOMER :
APPROVAL NO. :
APPROVED BY :
CUSTOMER
(AUTHORIZED)



DRAWN	NANCY	CHECKED	CINDY	APPROVED	CINDY	SPEC.NO	A17001730G-C1
						ISSUE DATE	04.08.2019
						EDITION	3
						REVISION DATE	09.18.2025
						E.SPEC	EA17103

HISTORY

REV	DESCRIPTION	DATE	APPROVED
0	INITIAL VERSION	2019.04.08	
1	A17001730G-C0→A17001730G-C1	2022.07.07	(C190404006-1)
2	For the hole on the frame with a diameter of 4.5 mm, it is recommended to use M4 machine screws with a tightening torque of 3– 4 kgf.cm.	2025.08.21	ECN(KD2025-EN1180)
3	To relax the tolerances based on customer requirements.	2025.09.18	ECN(KD2025-EN1285)

NO	A17001730G-C1	REVISION DATE	09.18.2025
DATE	04.08.2019	E D I T I O N	3
P A G E	2 OF 13		

MODEL NUMBERING SYSTEM

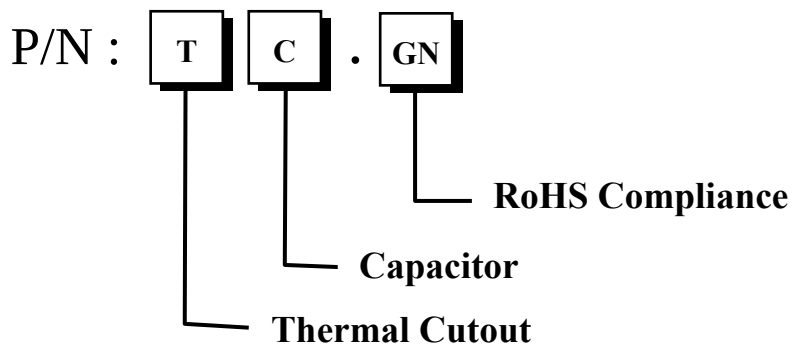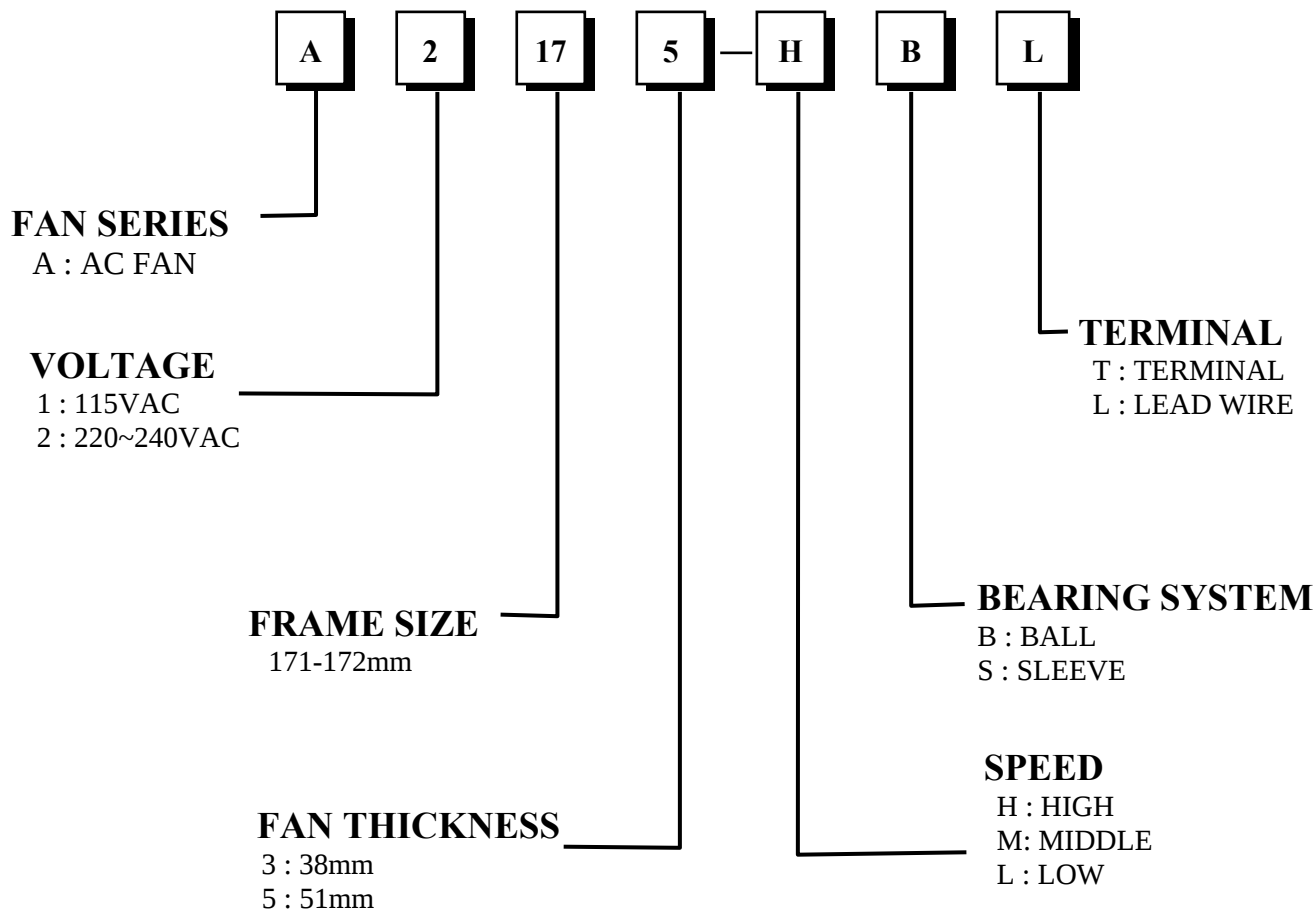

NO	A17001730G-C1	REVISION DATE	09.18.2025
DATE	04.08.2019	E D I T I O N	3
P A G E	3 O F 13		

AXIAL AC FAN

MODEL : A2175-HBL

P/N : TC.GN

CHARACTERISTICS

- 1. Motor Design** : Reliable Alveolate Motor Construction.
- 2. Insulation Resistance** : 500Megohms minimum at 500 VDC.
- 3. Dielectric Strength** : 1800 VAC for one second .
- 4. Motor Protection** : Thermal protected.
- 5. Noise Level** : Measured in a semi-anechoic chamber
with background noise level below 15
dB(A). The fan is running in free air with the
- from the fan intake.
- 6. Tolerance** : $\pm 15\%$ on rated power and current.
- 7. Air Performance** : Measured by a double chamber. The values
are recorded when the fan speed has stabilized
at rated voltage.


Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

SPEC.NO	A17001730G-C1	REVISION DATE	09.18.2025
ISSUE DATE	04.08.2019	E D I T I O N	3
P A G E	4 O F 13		

SPECIFICATIONS

MODEL: A2175-HBL**P/N : TC.GN**

- | | |
|-------------------------------------|--|
| 1-1. Rated Voltage | : 220-240 VAC 50/60 Hz |
| 1-2. Operating Voltage Range | : 150-250 VAC |
| 1-3. Starting Voltage | : 150 VAC(25 deg. C POWER ON/OFF) |
| 1-4. Rated Speed | : 2800/3200 RPM $\pm$ 10% |
| 1-5. Air Delivery | : Nominal 203/239 CFM |
| 1-6. Static Pressure | : Nominal 0.62/0.69 Inch-H₂O |
| 1-7. Rated Current | : 0.11/0.11 AMP |
| 1-8. Rated Power | : 25/26 WATTS |
| 1-9. Noise Level | : Nominal 51/58 dB(A) |
| 1-10. Direction of Rotation | : Clockwise viewed from front of fan blade |
| 1-11. Operating Temperature | : -10 to +70 deg. C |
| 1-12. Storage Temperature | : -40 to +70 deg. C |
| 1-13. Bearing System | : Precision ball bearing system |
| 1-14. Weight | : 908 g |
| 1-15. Safety | : UL/CUR/CE/TUV/CCC Approvals |
| 1-16. Protection | : ☐ Automatic Restart Capability
Note:The motor will shut down when rotor was locked, then auto restart within 10 seconds.
: ☐ Polarity Protection |

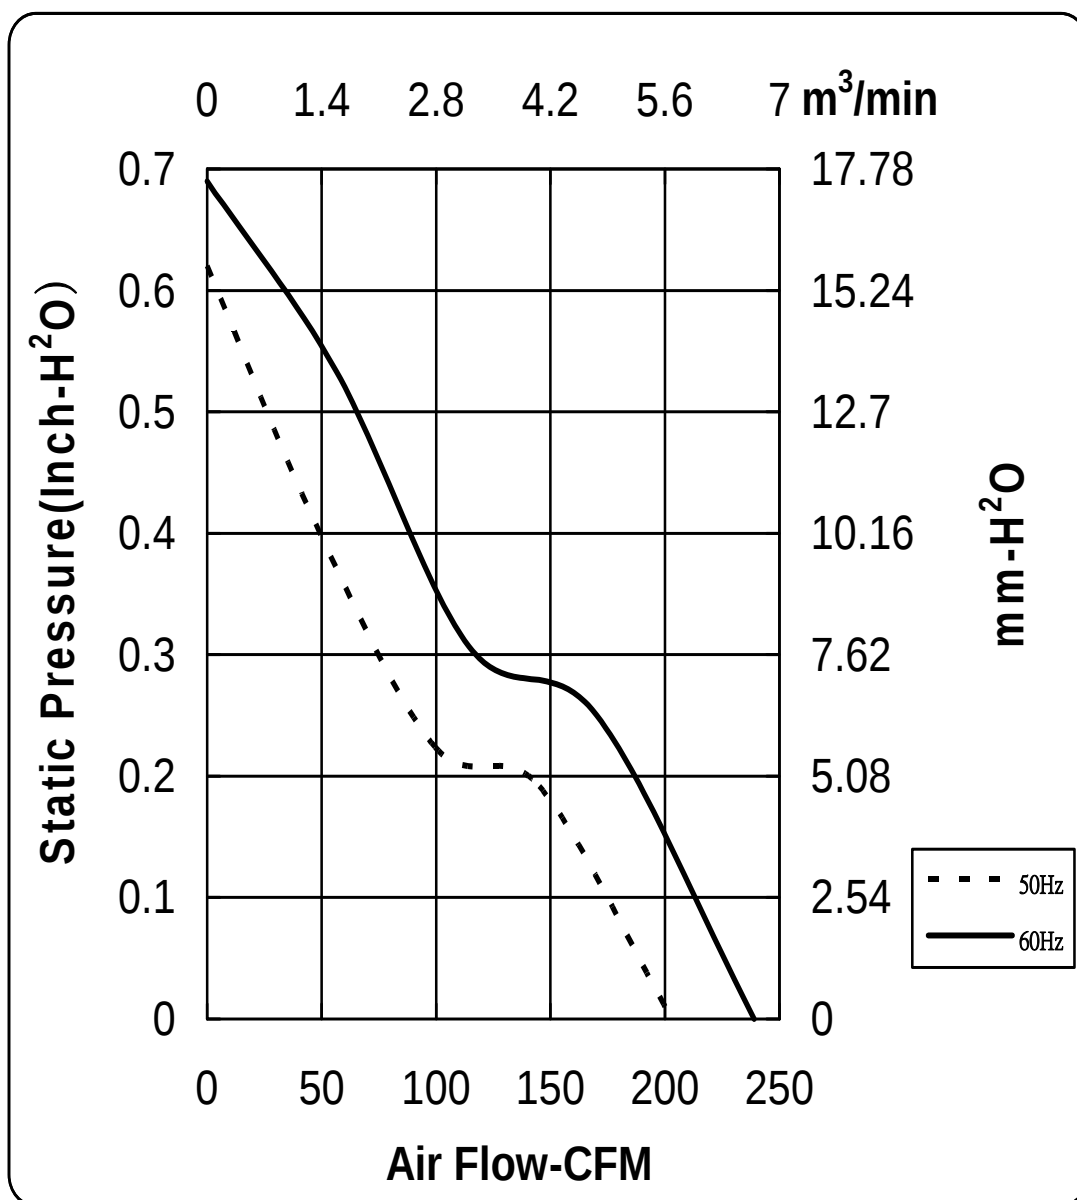MODEL : A2175-HBL**P/N : TC.GN****PERFORMANCE CURVES**

MATERIAL**2. Material**


2-1. Frame : DIE-CAST ALUMINUM

2-2. Impeller : PC of UL 94V-0

2-3. Lead Wire : UL1007, 18 awg, BLACK

DIMENSIONS


Screw Type (Pan head)	Torque	Screw Spec	
		Size	Standard
Machine screw	3~4 Kgf-cm	M4.0	JIS B1111-1974

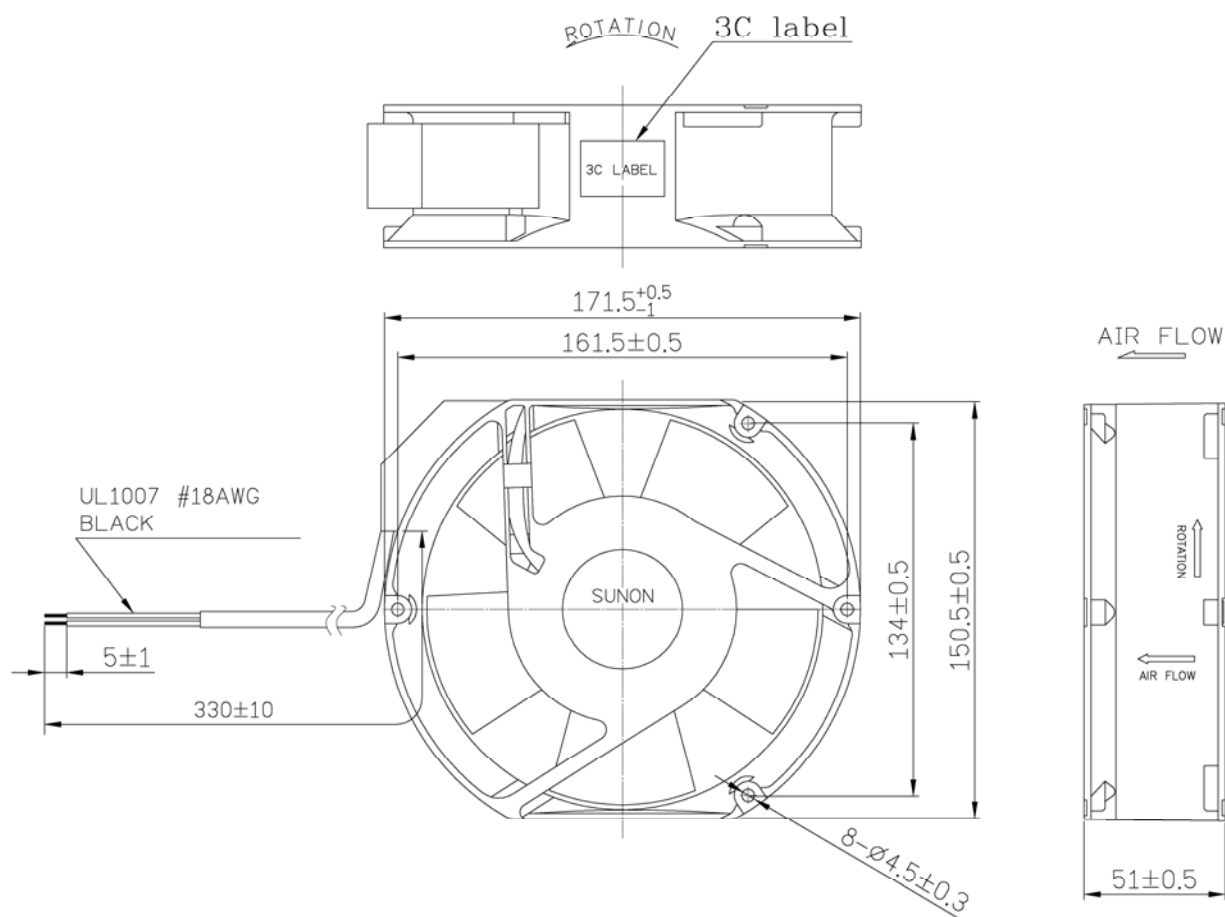

Air Flow Direction: Toward label side.

UNIT : mm

LABEL

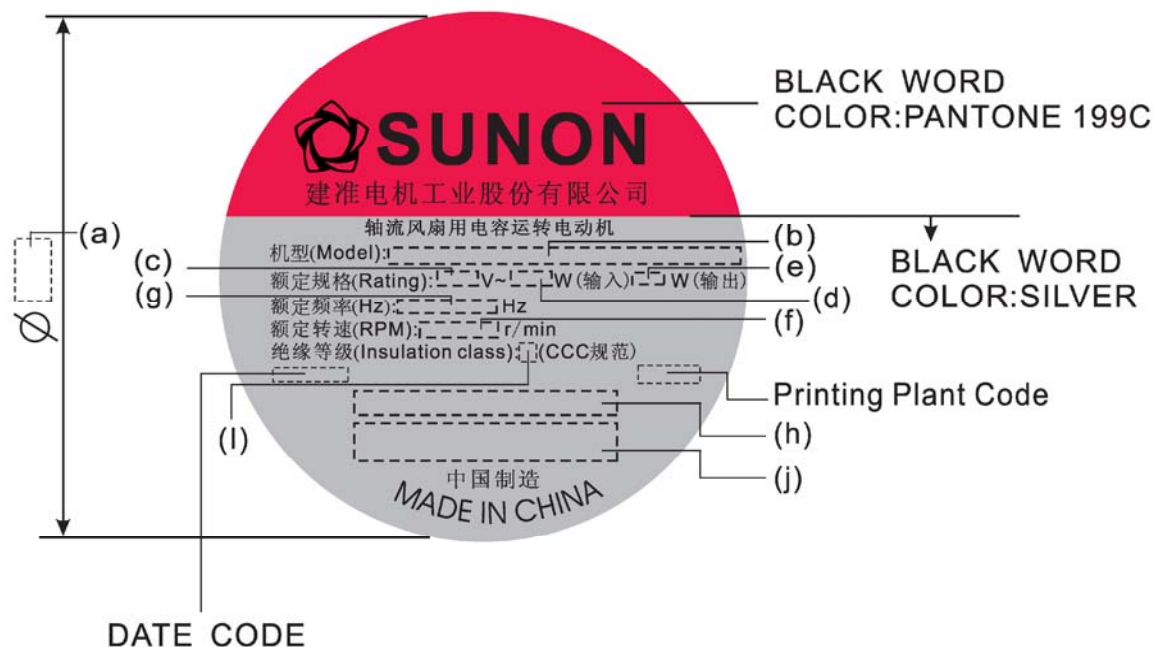

(a)Dimension	(b)Model Name	(c)Voltage	(d)Power Consumption	(e)Output Power Consumption
49	A2175-HBLTC.GN	220-240	25/26	9.5/13.5

(f)Rated Speed	(g)Frequency	(h)Protection	(i)Protection Class	(j)Safety
2800/3200	50/60	THERMAL PROTECTED	B	CCC/CE/TUV(ID20)/UL+CUR

1.English Font: Swis721 Series & Switzerland Narrow,Chinses Font: 超研澤中明簡體.

2.Safety(CCC/CE/TUV/UL+CUR)
TUV Certificate ID Number: 2000000000.




Alveolate Motor



Thermal Cutout

With Capacitor

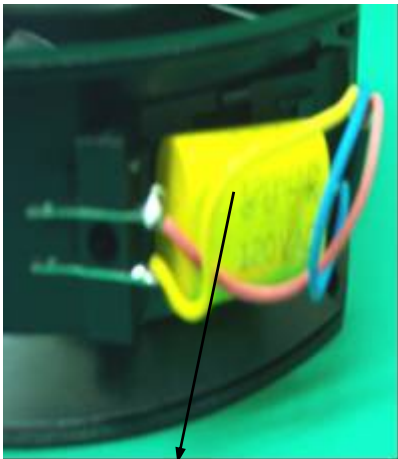

Capacitor

O	A17001730G-C1	REVISION DATE	09.18.2025
DATE	04.08.2019	E D I T I O N	3
P A G E	9 O F 13		

Notes

I .SAFETY

1. **DO NOT** use or operate this fan in excess of the limitations set forth in this specification. SUNON is not responsible for the non-performance of this fan and/or any damages resulting from its use, if it is not used or operated in accordance with the specifications.
 2. SUNON recommends adding a protection circuit to the product or application in which this fan is installed, such as a thermo-fuse, or current-fuse or thermo-protector. The failure to use such a device may result in smoke, fire, electric shock by insulation degradation in cases of motor lock, motor lead short circuit, overload, or over voltage, and/or other failure.
 3. SUNON recommends installing a protection device to the product or application in which this fan is installed if there is a possibility of reverse-connection between VDC (+) and GND (-). The failure to install such a device may result in smoke, fire, and/or destruction, although these conditions may
- Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com
4. **THIS FAN MUST BE INSTALLED AND USED** in compliance with all applicable safety standards and regulations.
 5. Use proper care when handling and/or installing this fan. Improper handling or installation of this fan may cause damage that could result in unsafe conditions.
 6. Use proper care during installation and/or wiring. Failure to use proper care may cause damage to certain components of the fan including, but not limited to, the coil and lead wires, which could result in smoke and/or fire.
 7. **DO NOT** use power or ground PWM to control the fan speed. If the fan speed needs to be adjusted, please contact SUNON to customize the product design for your application.
 8. For critical or extreme environments, including non stop operation, please contact SUNON we will gladly provide assistance with your product selection to ensure an appropriate cooling product for your application.

SPEC.NO	A17001730G-C1	REVISION DATE	09.18.2025
ISSUE DATE	04.08.2019	E D I T I O N	3
P A G E	10 OF 13		

Notes

II. SPECIFICATION MODIFICATION

1. SUNON offers engineering assistance on fan installation and cooling system design.
2. All changes, modifications and/or revisions to the specifications, if any, are incorporated in the attached specifications.
3. No changes, modifications and/or revisions to these specifications are effective absent agreement, by both SUNON the customer, in writing.
4. This fan will be shipped in accordance with the attached specification unless SUNON and the customer have agreed otherwise, in writing, as specified in Paragraph 3, above.

III. OTHER

1. When building your device, please examine thoroughly any variation of EMC, temperature rise, life data, quality, etc. of this product by shock/drop/vibration testing, etc. If there are any problems or accidents in connection with this product, it should be mutually discussed and examined.
2. Use proper care when handling this fan. Components such as fan holders or bearings may be damaged, if touched with fingers or other objects. Additionally, static electricity (ESD) may damage the internal circuits of the fan.
3. DO NOT operate this fan in proximity to hazardous materials such as organic silicon, cyanogens, formalin, phenol, or corrosive gas environments including, but not limited to, H₂S, SO₂, NO₂, or Cl₂.
4. SUNON recommends that you protect this fan from exposure to outside elements such as dust, condensation, humidity or insects. Exposure of this fan to outside elements such as dust, condensation, humidity or insects may affect its performance and may cause safety hazards. SUNON does not warrant against damage to the product caused by outside elements.

Re: The term can be excluded, if the fan has been with IP design and meets customer's IP requirement.

NO	A17001730G-C1	REVISION DATE	09.18.2025
DATE	04.08.2019	E D I T I O N	3
P A G E	11 OF 13		

Notes

5. This fan must be installed properly and securely. Improper mounting may cause harsh resonance, vibration, and noise.
6. Fan guards may prevent injury during handling or installation of the fan and are available for sale with this fan.
7. Unless otherwise noted, all testing of this fan is conducted at 25°C ambient temperature and sixty-five percent (65%) relative humidity.
8. **DO NOT** store this fan in an environment with high humidity. This fan must be stored in accordance with the attached specifications regarding storage temperature. If this fan is stored for more than 6 months, SUNON recommends functional testing before using.
9. SUNON reserves the right to use components from multiple sources at its discretion. The use of components from other sources will not affect the specifications as described herein.
10. The “Life Expectancy” of this fan has not been evaluated for use in combination with any end application. Therefore, the Life Expectancy Test Reports (L10 and MTTF Report) that relate to this fan are only for reference.

IV. WARRANTY

This fan is warranted against all defects which are proved to be fault in our workmanship and material for one year from the date of our delivery. The sole responsibility under the warranty shall be limited to the repair of the fan or the replacement thereof, at SUNON’s sole discretion. SUNON will not be responsible for the failures of its fans due to improper handing, misuse or the failure to follow specifications or instructions for use. In the event of warranty claim, the

Beijing Hengrui Mechanical and Electrical Equipment Co., Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

amage to the customer’s equipment as a

result of any fans proven to be defective.

SPEC.NO	A17001730G-C1	REVISION DATE	09.18.2025
ISSUE DATE	04.08.2019	E D I T I O N	3
P A G E	12 OF 13		

Declaration of RoHS

Control declaration of environment- related substances/ materials

1. In accordance with the Restriction of Hazardous Substances (RoHS) Directive 2011/65/EU, SUNON product with P/N: GN models have complied with law and discipline not to employ the forbidden substances, and restrict the allowable

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

Substance		Criteria
1	CFCs & HCFCs (ozone depleting substances)	Forbidden
2	Chlorinated Organic Solvent	Forbidden
3	Lead and its compounds	Plastic (Frame, Impeller, wire harness, etc.)
		Solder
		Steel alloy
		Aluminium alloy
		Copper alloy
4	Cadmium and its compounds	Solder
		Parts composed of metals containing zinc (e.g. brass, zinc for die casting)
		Plastic
5	PBBs and PBDEs	Forbidden
6	PCB and PCT	Forbidden
7	CP, Short-chain Chlorinated paraffins C10-13, Cl ≥48 wt%	Forbidden
8	Mirex	Forbidden
9	PCN	Forbidden
10	Hexavalent Chromium compounds	<100ppm
11	Mercury and its compounds	Forbidden
12	Asbestos	Forbidden
13	Organic Tin compounds	Forbidden
14	Azo compounds	Forbidden
15	TBBP-A in external case plastic parts of products (PCB is exempted)	<1000ppm
16	Nickel in external case parts, which are likely to result in prolonged skin exposure	<1000ppm
17	Hexabromocyclododecane (HBCDD)	<1000ppm
18	Di-butyl Phthalate (DBP)	<1000ppm
19	Benzyl butyl Phthalate (BBP)	<1000ppm
20	Di-ethylhexyl Phthalate (DEHP)	<1000ppm
21	Di-isobutyl Phthalate (DIBP)	<1000ppm

SPEC.NO	A17001730G-C1	REVISION DATE	09.18.2025
ISSUE DATE	04.08.2019	E D I T I O N	3
P A G E	13 OF 13		