

120x120x25 mm

75.0~108.2 CFM




### ■ Specification



|  | Bearing           | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|-------------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO            | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MFC0251V1-0000-A99                                                                | ●                 | 12            | 350           | 4.20              | 3100  | 108.2   | 0.28                    | 44.5    | 162.0  | 1     |
| MFC0251V2-0000-A99                                                                | ●                 | 12            | 250           | 3.00              | 2700  | 93.0    | 0.22                    | 40.5    | 162.0  | 2     |
| MFC0251V3-0000-A99                                                                | ●                 | 12            | 140           | 1.68              | 2200  | 75.0    | 0.16                    | 34.0    | 162.0  | 3     |
| MEC0252V1-0000-A99                                                                | ●                 | 24            | 207           | 5.00              | 3100  | 108.2   | 0.28                    | 44.5    | 162.0  | 1     |
| MEC0252V2-0000-A99                                                                | ●                 | 24            | 146           | 3.50              | 2700  | 93.0    | 0.22                    | 40.5    | 162.0  | 2     |
| MEC0252V3-0000-A99                                                                | ●                 | 24            | 84            | 2.00              | 2200  | 75.0    | 0.16                    | 34.0    | 162.0  | 3     |
| Model                                                                             | 2BALL<br>O Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EEC0251B1-0000-A99                                                                | ☉                 | 12            | 451           | 5.4               | 3100  | 108.2   | 0.28                    | 44.5    | 157.0  | 1     |
| EEC0251B2-0000-A99                                                                | ☉                 | 12            | 279           | 3.4               | 2700  | 93.0    | 0.22                    | 40.5    | 157.0  | 2     |
| EEC0251B3-0000-A99                                                                | ☉                 | 12            | 161           | 1.9               | 2200  | 75.0    | 0.16                    | 34.0    | 157.0  | 3     |
| EEC0252B1-0000-A99                                                                | ☉                 | 24            | 207           | 5.0               | 3100  | 108.2   | 0.28                    | 44.5    | 157.0  | 1     |
| EEC0252B2-0000-A99                                                                | ☉                 | 24            | 146           | 3.5               | 2700  | 93.0    | 0.22                    | 40.5    | 157.0  | 2     |
| EEC0252B3-0000-A99                                                                | ☉                 | 24            | 84            | 2.0               | 2200  | 75.0    | 0.16                    | 34.0    | 157.0  | 3     |
| EEC0254B1-0000-A99                                                                | ☉                 | 48            | 119           | 5.7               | 3100  | 108.2   | 0.28                    | 44.5    | 157.0  | 1     |
| EEC0254B2-0000-A99                                                                | ☉                 | 48            | 79            | 3.8               | 2700  | 93.0    | 0.22                    | 40.5    | 157.0  | 2     |
| EEC0254B3-0000-A99                                                                | ☉                 | 48            | 54            | 2.6               | 2200  | 75.0    | 0.16                    | 34.0    | 157.0  | 3     |

### ■ Function R Type : F99 / F Type : G99

### ■ Air Flow-Static Pressure Characteristics

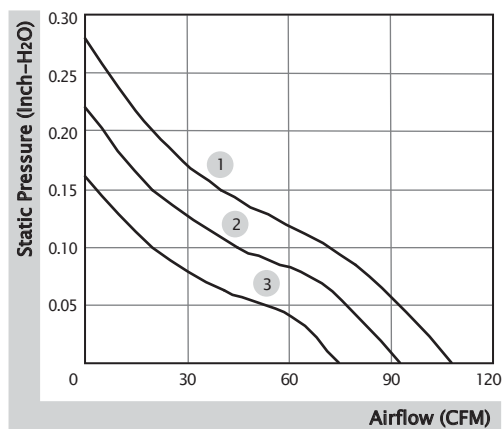

### ■ External Dimensions(mm)

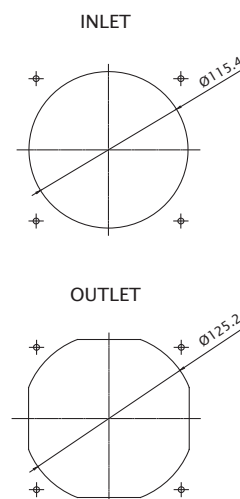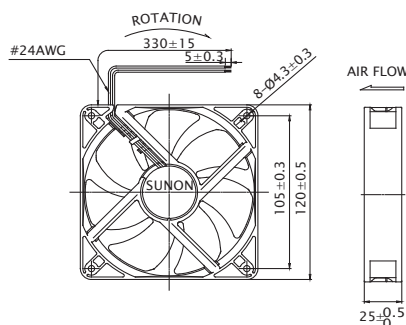

120x120x25 mm

55.1 CFM




■ Specification


| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| HAC0251S4-10000-999 | ○            | 12            | 88            | 1.06              | 1600  | 55.1    | 0.07                    | 28.8    | 106.0  | 1     |

■ Function    F Type : C99

■ Air Flow-Static Pressure Characteristics

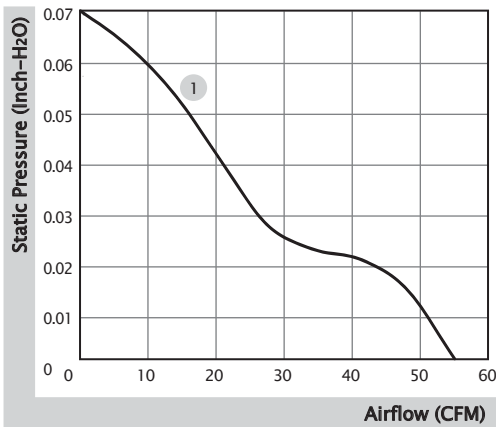

■ External Dimensions(mm)

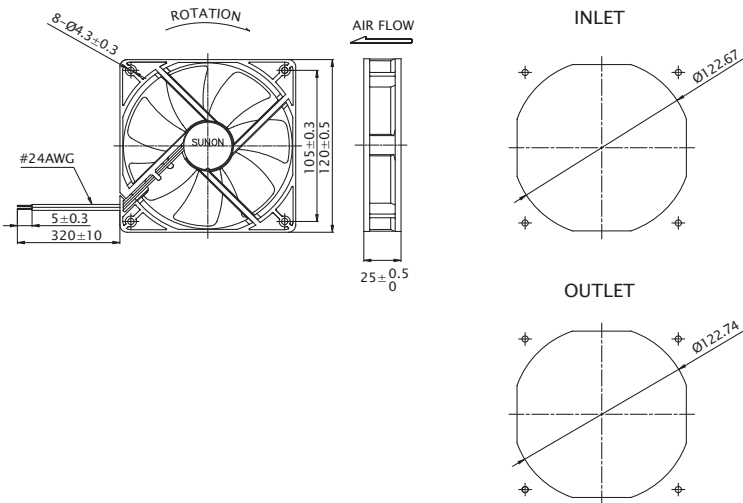

120x120x38 mm

301.7 CFM




■ Specification

| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| XGC0384BX-10000-A9H | ☉            | 48            | 2100          | 100.8             | 11600 | 301.7   | 5.58                    | 75.0    | 465.0  | 1     |

■ Function    F Type : G9H   /   PWM : H9H, S9H

■ Air Flow-Static Pressure Characteristics

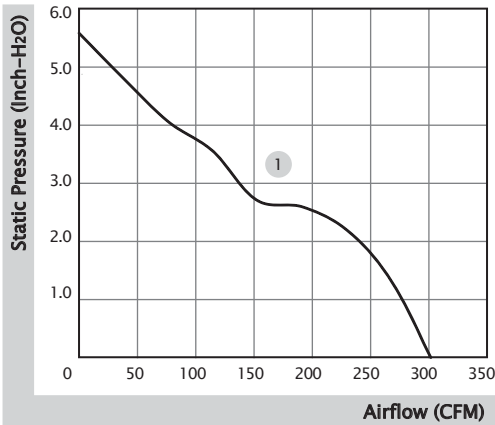

■ External Dimensions(mm)

