

120x120x25 mm


55.0 CFM




■ Specifications

| Model              | Bearing      | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| HAC0251S4-000U-999 | ○            | 12             | 155           | 1.9               | 1600  | 55.0     | 0.06                    | 29.6    | 99.0   | 1     |

■ Air Flow-Static Pressure Characteristics

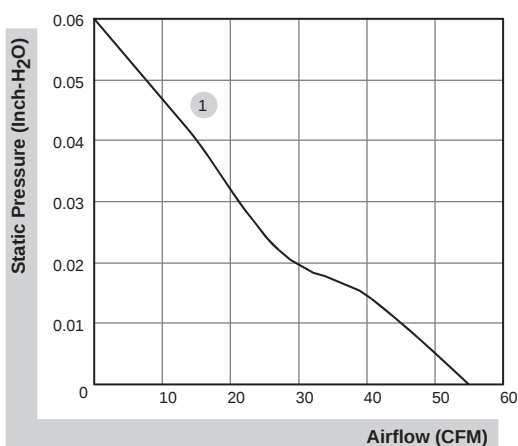

■ External dimensions(mm)

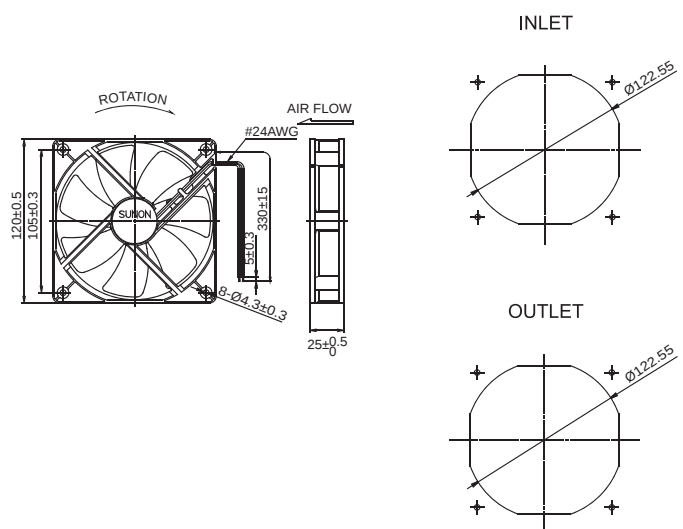

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

120x120x38 mm


170.0~190.0 CFM




### ■ Specifications

| Model                | Bearing      | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|----------------------|--------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                      | 2BALL Sleeve | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PMD1212PMB1-A (2).GN | ☉            | 12             | 1600          | 19.2              | 4200  | 190.0    | 0.65                    | 54.0    | 330.0  | 1     |
| PMD1212PMB2-A (2).GN | ☉            | 12             | 1200          | 14.4              | 3800  | 170.0    | 0.54                    | 51.0    | 330.0  | 2     |
| PMD2412PMB1-A (2).GN | ☉            | 24             | 760           | 18.2              | 4200  | 190.0    | 0.65                    | 54.0    | 330.0  | 1     |
| PMD2412PMB2-A (2).GN | ☉            | 24             | 570           | 13.7              | 3800  | 170.0    | 0.54                    | 51.0    | 330.0  | 2     |
| PMD4812PMB1-A (2).GN | ☉            | 48             | 400           | 19.2              | 4200  | 190.0    | 0.65                    | 54.0    | 330.0  | 1     |
| PMD4812PMB2-A (2).GN | ☉            | 48             | 300           | 14.4              | 3800  | 170.0    | 0.54                    | 51.0    | 330.0  | 2     |

### ■ Air Flow-Static Pressure Characteristics

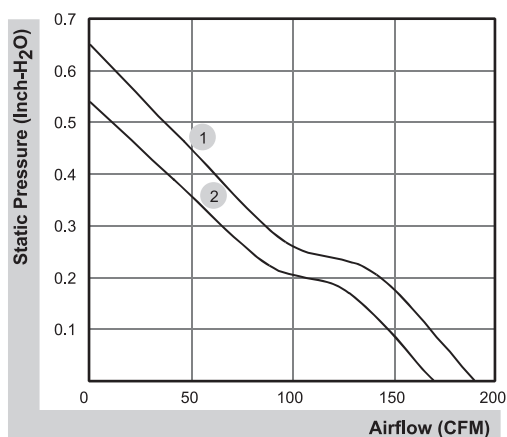

### ■ External dimensions(mm)

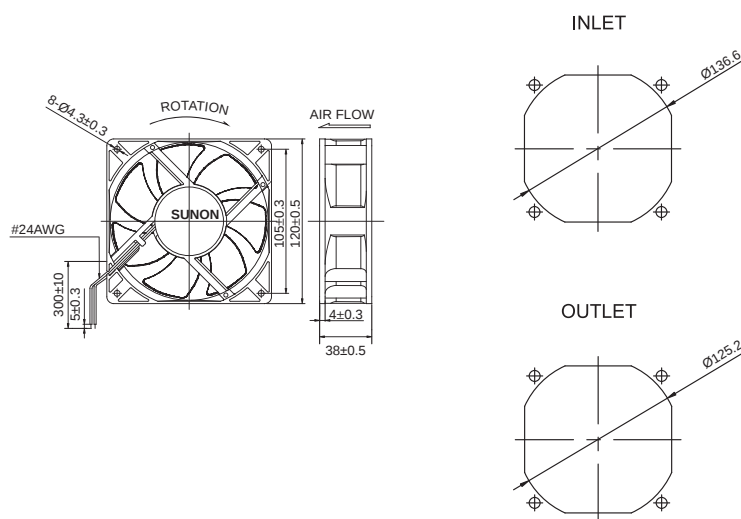

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

# 120x120x38 mm

## 93.0~138.0 CFM




### Specifications


|  | Bearing | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MEC0381V1-000U-A99                                                                | ●       | 12             | 833           | 10.0              | 3100  | 138.0    | 0.36                    | 48.0    | 218.0  | 1     |
| MEC0381V2-000U-A99                                                                | ●       | 12             | 421           | 5.1               | 2600  | 116.0    | 0.26                    | 44.0    | 218.0  | 2     |
| MEC0381V3-000U-A99                                                                | ●       | 12             | 241           | 2.9               | 2100  | 93.0     | 0.18                    | 37.0    | 218.0  | 3     |
| MEC0382V1-000U-A99                                                                | ●       | 24             | 383           | 9.2               | 3100  | 138.0    | 0.36                    | 48.0    | 218.0  | 1     |
| MEC0382V2-000U-A99                                                                | ●       | 24             | 224           | 5.4               | 2600  | 116.0    | 0.26                    | 44.0    | 218.0  | 2     |
| MEC0382V3-000U-A99                                                                | ●       | 24             | 130           | 3.1               | 2100  | 93.0     | 0.18                    | 37.0    | 218.0  | 3     |
| MEC0384V1-000U-A99                                                                | ●       | 48             | 203           | 9.7               | 3100  | 138.0    | 0.36                    | 48.0    | 218.0  | 1     |
| MEC0384V2-000U-A99                                                                | ●       | 48             | 120           | 5.8               | 2600  | 116.0    | 0.26                    | 44.0    | 218.0  | 2     |
| MEC0384V3-000U-A99                                                                | ●       | 48             | 69            | 3.3               | 2100  | 93.0     | 0.18                    | 37.0    | 218.0  | 3     |

| Model              | Bearing        | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|----------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                    | ⊙ 2BALL Sleeve | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EEC0381B1-000U-A99 | ⊙              | 12             | 833           | 10.0              | 3100  | 138.0    | 0.36                    | 48.0    | 214.0  | 1     |
| EEC0381B2-000U-A99 | ⊙              | 12             | 421           | 5.1               | 2600  | 116.0    | 0.26                    | 44.0    | 214.0  | 2     |
| EEC0381B3-000U-A99 | ⊙              | 12             | 241           | 2.9               | 2100  | 93.0     | 0.18                    | 37.0    | 214.0  | 3     |
| EEC0382B1-000U-A99 | ⊙              | 24             | 383           | 9.2               | 3100  | 138.0    | 0.36                    | 48.0    | 214.0  | 1     |
| EEC0382B2-000U-A99 | ⊙              | 24             | 224           | 5.4               | 2600  | 116.0    | 0.26                    | 44.0    | 214.0  | 2     |
| EEC0382B3-000U-A99 | ⊙              | 24             | 130           | 3.1               | 2100  | 93.0     | 0.18                    | 37.0    | 214.0  | 3     |
| EEC0384B1-000U-A99 | ⊙              | 48             | 203           | 9.7               | 3100  | 138.0    | 0.36                    | 48.0    | 214.0  | 1     |
| EEC0384B2-000U-A99 | ⊙              | 48             | 120           | 5.8               | 2600  | 116.0    | 0.26                    | 44.0    | 214.0  | 2     |
| EEC0384B3-000U-A99 | ⊙              | 48             | 69            | 3.3               | 2100  | 93.0     | 0.18                    | 37.0    | 214.0  | 3     |

### Air Flow-Static Pressure Characteristics

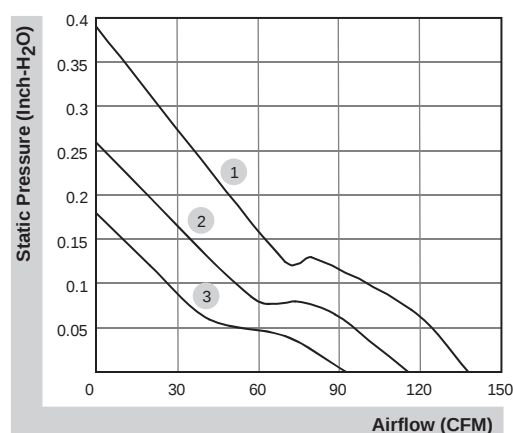

### External dimensions(mm)

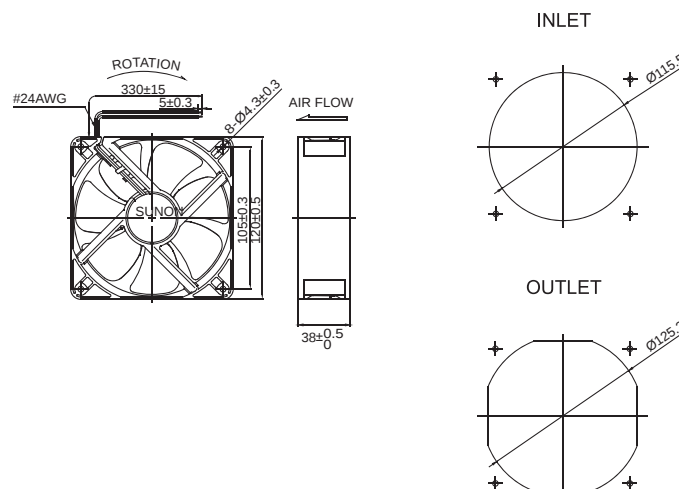

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com