

# EC centrifugal fan - RadiCal

backward curved, single inlet



Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd  
Phone +86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | R3G225-RD05-03    |            |
| Motor                    | M3G055-CF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed                    | min <sup>-1</sup> | 2200       |
| Power input              | W                 | 82         |
| Current draw             | A                 | 0.7        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | +60        |


ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations



## Technical features

|                                                                    |                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                               | 1.4 kg                                                                                                                                                                                                                                                                                                                                           |
| Size                                                               | 225 mm                                                                                                                                                                                                                                                                                                                                           |
| Surface of rotor                                                   | Thick layer passivated                                                                                                                                                                                                                                                                                                                           |
| Material of electronics housing                                    | Die-cast aluminium                                                                                                                                                                                                                                                                                                                               |
| Material of impeller                                               | PA plastic                                                                                                                                                                                                                                                                                                                                       |
| Number of blades                                                   | 7                                                                                                                                                                                                                                                                                                                                                |
| Direction of rotation                                              | Clockwise, seen on rotor                                                                                                                                                                                                                                                                                                                         |
| Type of protection                                                 | IP 54                                                                                                                                                                                                                                                                                                                                            |
| Insulation class                                                   | "B"                                                                                                                                                                                                                                                                                                                                              |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                                                                                                                                                                                                                                                                                                          |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                                                                                                                                                                                                                                                                                                          |
| Mounting position                                                  | Any                                                                                                                                                                                                                                                                                                                                              |
| Condensate discharge holes                                         | None, open rotor                                                                                                                                                                                                                                                                                                                                 |
| Operation mode                                                     | S1                                                                                                                                                                                                                                                                                                                                               |
| Motor bearing                                                      | Ball bearing                                                                                                                                                                                                                                                                                                                                     |
| Technical features                                                 | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Tach output</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Over-temperature protected electronics / motor</li> </ul> |
| EMC interference immunity                                          | Acc. to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                    |
| EMC harmonics                                                      | Acc. to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                           |
| EMC interference emission                                          | Acc. to EN 55022 (Class B, household environment), on account of the installation conditions, ferritic damping in the connection line may be required for the application.                                                                                                                                                                       |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                        |
| Motor protection                                                   | Locked-rotor protection                                                                                                                                                                                                                                                                                                                          |
| Cable exit                                                         | Variable                                                                                                                                                                                                                                                                                                                                         |
| Protection class                                                   | I (if protective earth is connected by customer)                                                                                                                                                                                                                                                                                                 |
| Product conforming to standard                                     | EN 60335-1                                                                                                                                                                                                                                                                                                                                       |

## Product drawing

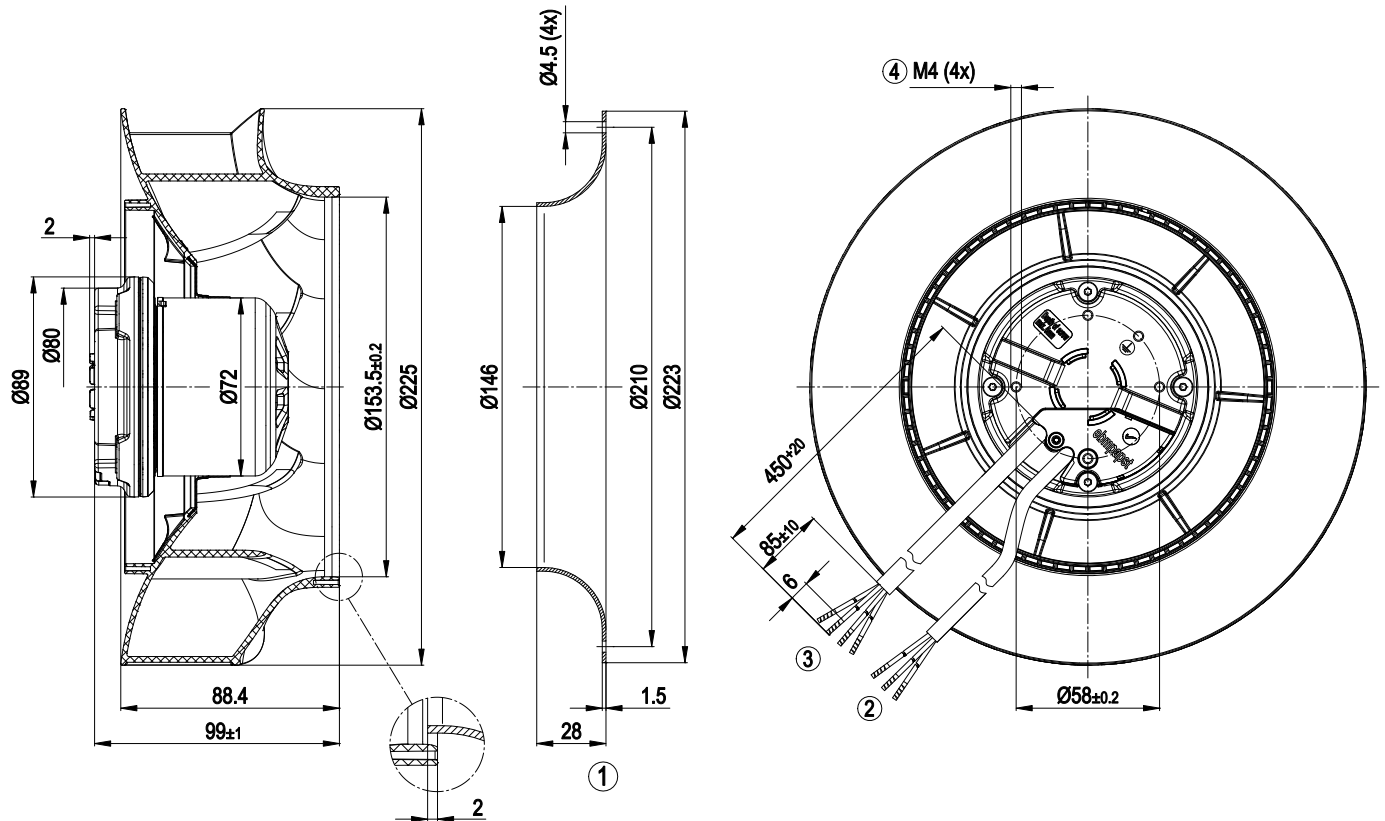


- |   |                                                                                           |
|---|-------------------------------------------------------------------------------------------|
| 1 | Accessory part: Inlet nozzle 96358-2-4013, not included in the standard scope of delivery |
| 2 | Connection line PVC 3G AWG20, 3x brass lead tips crimped                                  |
| 3 | Control cable PVC AWG 22, 4 x brass lead tips crimped                                     |
| 4 | Depth of screw max. 5 mm                                                                  |

# EC centrifugal fan - RadiCal

backward curved, single inlet

## Connection screen

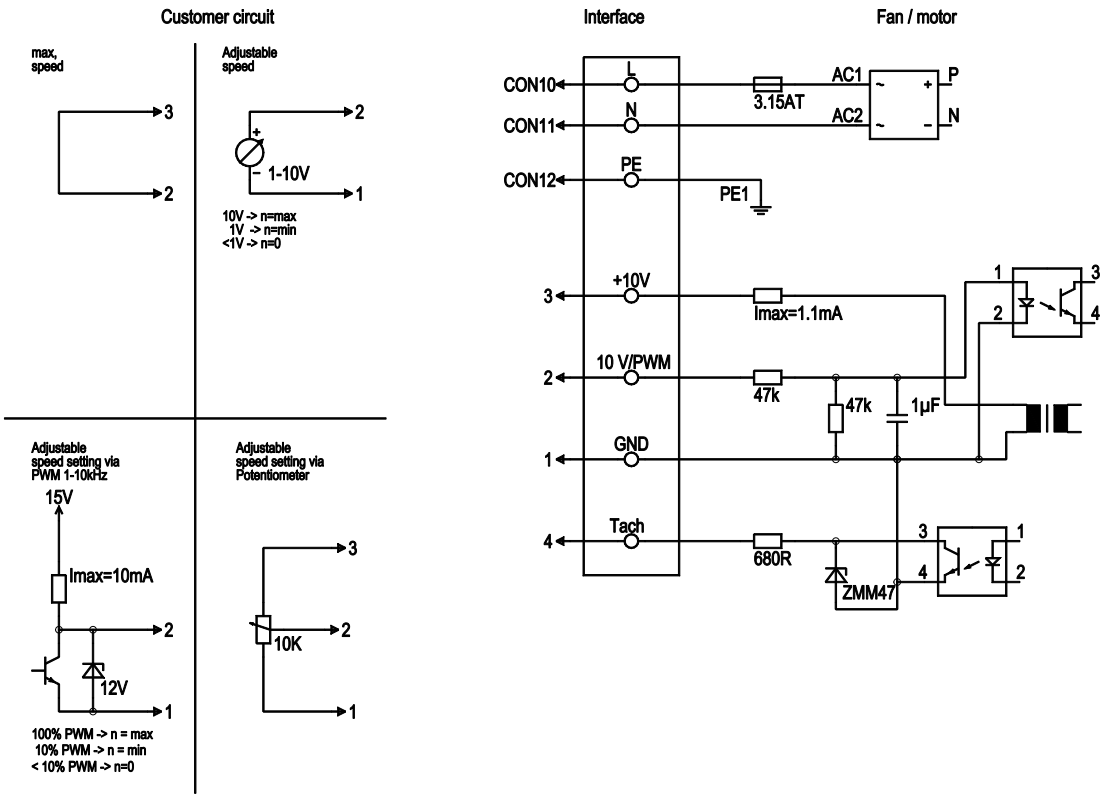


| Line | No.   | Signal         | Colour       | Function / assignment                                                      |
|------|-------|----------------|--------------|----------------------------------------------------------------------------|
|      | CON10 | L              | black        | Power supply 230 VAC, 50-60 Hz, for voltage range refer to rating plate    |
|      | CON11 | N              | blue         | Neutral conductor                                                          |
|      | CON12 | PE             | green/yellow | Protective earth                                                           |
|      | 1     | GND            | blue         | GND - Connection for control interface                                     |
|      | 2     | 0- 10V PWM     | yellow       | Control input 0 - 10 V or PWM, electrically isolated                       |
|      | 3     | 10V/ max 1.1mA | red          | Voltage output 10V/ 1.1mA, electrically isolated, not short-circuit-proof. |
|      | 4     | Tach           | white        | Tach output: open collector, 1 pulse per revolution, electrically isolated |



# EC centrifugal fan - RadiCal

backward curved, single inlet

## Charts: Air flow 50 Hz

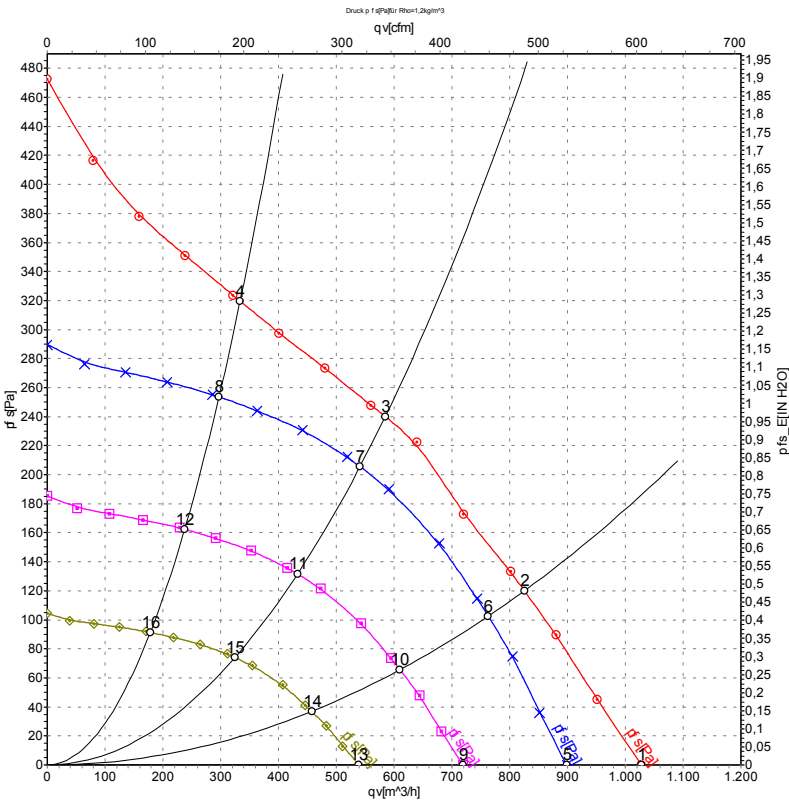

Measurement: LU-128059

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebm-papst. Suction-side noise  
levels: L<sub>wA</sub> measured as per ISO 13347 /  
L<sub>pA</sub> measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | qv   | p <sub>ts</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h | Pa              |
| 1  | 230 | 50 | 2285              | 70              | 0.62 | 62                | 69                | 1030 | 0               |
| 2  | 230 | 50 | 2165              | 77              | 0.66 | 57                | 64                | 825  | 120             |
| 3  | 230 | 50 | 2200              | 82              | 0.70 | 52                | 60                | 585  | 240             |
| 4  | 230 | 50 | 2245              | 72              | 0.61 | 59                | 67                | 335  | 320             |
| 5  | 230 | 50 | 2000              | 47              | 0.41 | 59                | 66                | 900  | 0               |
| 6  | 230 | 50 | 2000              | 62              | 0.52 | 55                | 63                | 765  | 102             |
| 7  | 230 | 50 | 2000              | 62              | 0.52 | 51                | 58                | 540  | 206             |
| 8  | 230 | 50 | 2000              | 51              | 0.44 | 56                | 65                | 295  | 254             |
| 9  | 230 | 50 | 1600              | 24              | 0.21 | 54                | 62                | 720  | 0               |
| 10 | 230 | 50 | 1600              | 32              | 0.27 | 50                | 58                | 610  | 66              |
| 11 | 230 | 50 | 1600              | 32              | 0.27 | 46                | 54                | 435  | 132             |
| 12 | 230 | 50 | 1600              | 26              | 0.22 | 51                | 60                | 240  | 162             |
| 13 | 230 | 50 | 1200              | 10              | 0.09 | 48                | 55                | 540  | 0               |
| 14 | 230 | 50 | 1200              | 13              | 0.11 | 44                | 52                | 460  | 37              |
| 15 | 230 | 50 | 1200              | 13              | 0.11 | 39                | 47                | 325  | 74              |
| 16 | 230 | 50 | 1200              | 11              | 0.09 | 45                | 53                | 180  | 91              |

U = Supply voltage · f = Frequency · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · qv = Air flow  
p<sub>ts</sub> = Pressure increase

