

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd
 Phone +86 10-62547612
 zhangyu@bjhengrui.cn
 en.bjhengrui.com



Nominal data

Type	R4D355-AH11-09				
Motor	M4D074-EI				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	230	400	400
Connection		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Type of data definition		fa	fa	fa	fa
Valid for approval / standard		CE	CE	CE	CE
Speed	min ⁻¹	1400	1600	1400	1600
Power input	W	170	235	170	235
Current draw	A	0.90	0.87	0.52	0.50
Min. back pressure	Pa	0	0	0	0
Min. ambient temperature	°C	-25	-25	-25	-25
Max. ambient temperature	°C	70	65	70	65
Starting current	A	2.6	2.55	1.5	1.45

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
 Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

	Actual	Request 2013	Request 2015
Overall efficiency η_{es}	44.8	40.8	44.8
Efficiency grade N	62	58	62
Power input P_e	kW	0.23	
Air flow q_v	m ³ /h	1445	
Pressure increase p_{fs}	Pa	251	
Speed n	min ⁻¹	1350	

Data established at point of optimum efficiency




Technical features

Mass	4.9 kg
Size	355 mm
Surface of rotor	Coated in black
Material of impeller	Aluminium sheet, laser-welded
Number of blades	6
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44
Insulation class	"F"
Humidity class	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) brought out
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE
Approval	CCC

AC centrifugal fan

backward curved, single inlet

Product drawing

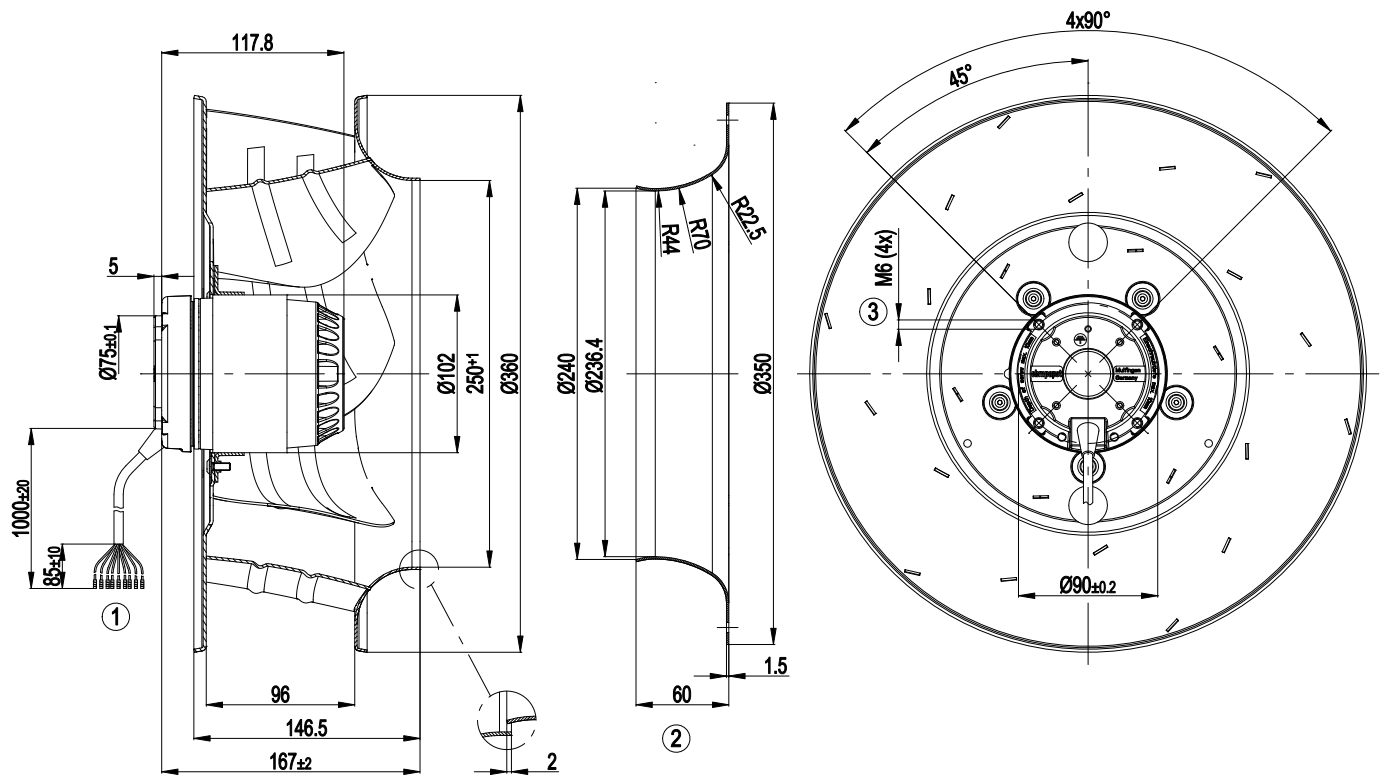


- | | |
|---|--|
| 1 | Connection line silicone 0.5 mm, 9 x brass lead tips crimped |
| 2 | Accessory part: Inlet nozzle 35560-2-4013 not included in the standard scope of delivery, other inlet nozzles on request |
| 3 | Depth of screw max. 10 mm |

AC centrifugal fan

backward curved, single inlet

Connection screen

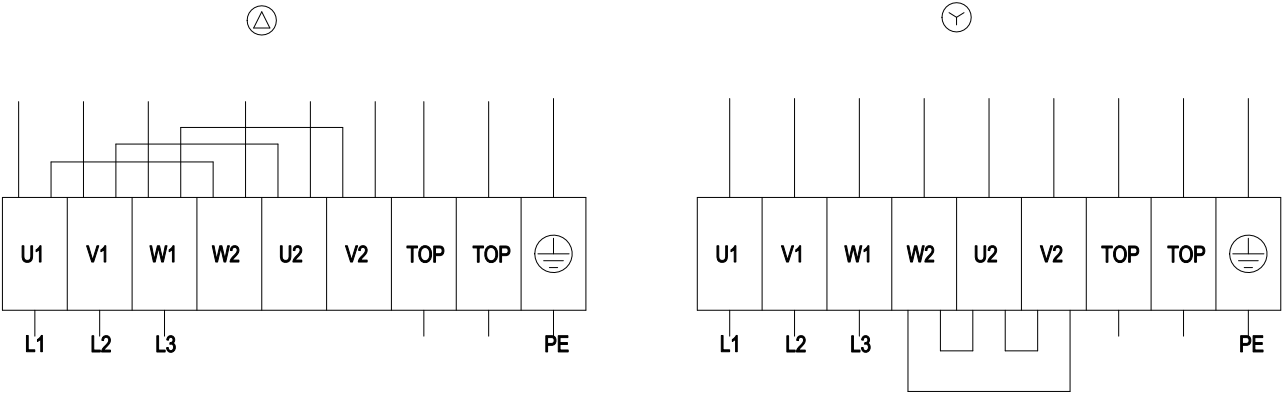


Δ	Delta-connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green / yellow				

AC centrifugal fan

backward curved, single inlet

Charts: Air flow 50 Hz

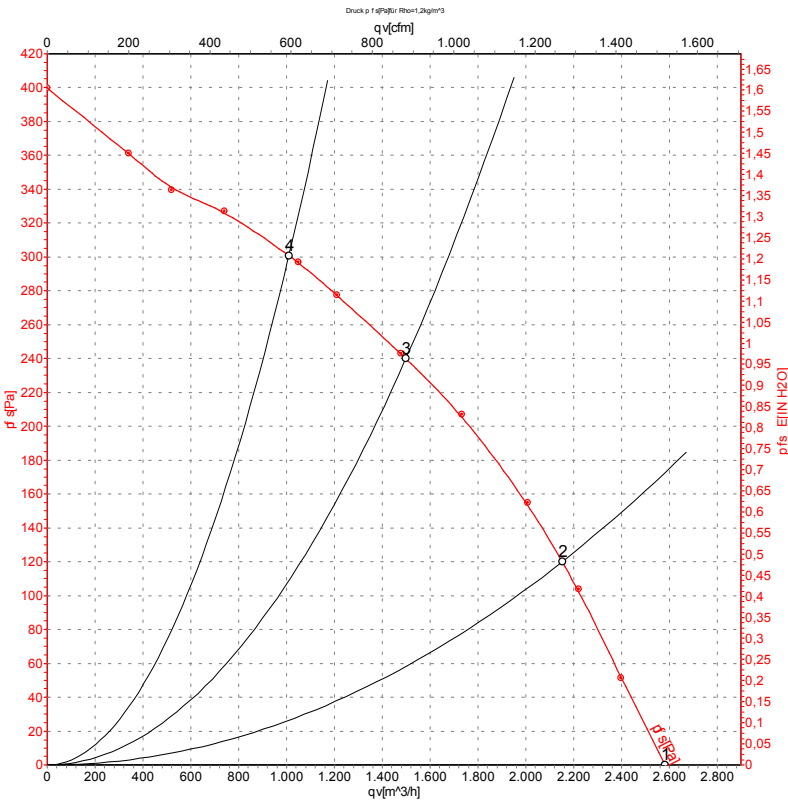

Measurement: LU-54350

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.


Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	400	50	1400	170	0.52	2585	0
2	400	50	1375	211	0.55	2155	120
3	400	50	1360	231	0.57	1500	240
4	400	50	1370	215	0.54	1010	300

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



Charts: Air flow 60 Hz

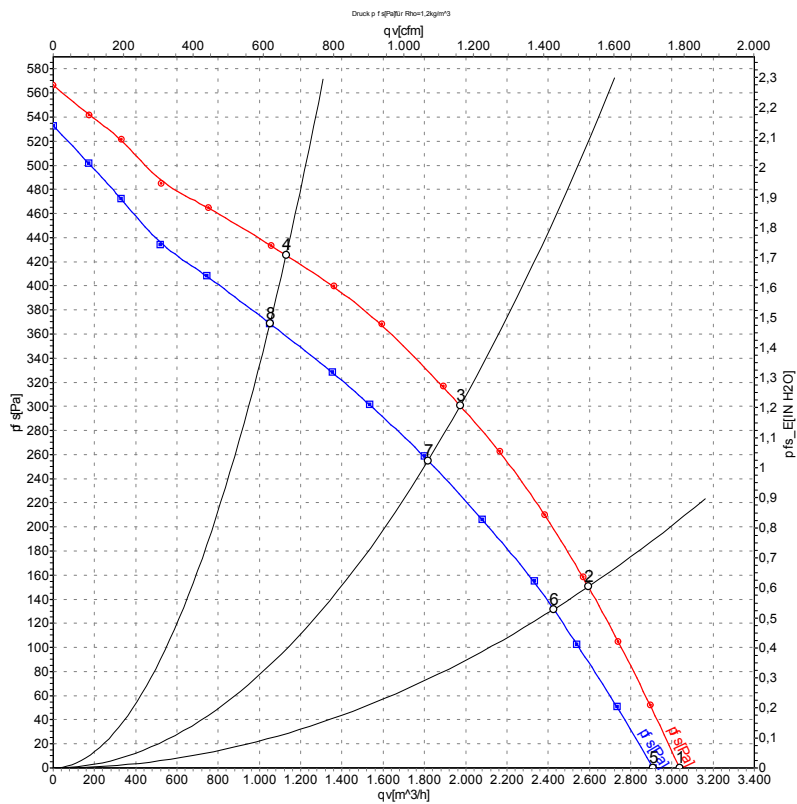

Measurement: LU-54436
Measurement: LU-54351

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	480	60	1670	260	0.55	3040	0
2	480	60	1625	316	0.58	2595	150
3	480	60	1595	354	0.61	1975	300
4	480	60	1620	325	0.58	1130	425
5	400	60	1600	235	0.50	2910	0
6	400	60	1525	287	0.57	2425	132
7	400	60	1475	318	0.62	1815	256
8	400	60	1510	294	0.58	1050	369

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · q_v = Air flow · P_{fs} = Pressure increase