

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd

Phone +86 10-62547612

zhangyu@bjhengrui.cn

en.bjhengrui.com



Nominal data

Type	R4E355-RB10-01	
Motor	M4E074-GA	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Type of data definition		ml
Valid for approval / standard		CE
Speed	min ⁻¹	1330
Power input	W	270
Current draw	A	1.18
Motor capacitor	μF	6
Capacitor voltage	VDB	400
Capacitor standard		P0 (CE)
Min. back pressure	Pa	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60
Starting current	A	2.2

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}	%	45.4	41.4	45.4
Efficiency grade N		62	58	62
Power input P_e	kW	0.26		
Air flow q_v	m ³ /h	2110		
Pressure increase p_{fs}	Pa	201		
Speed n	min ⁻¹	1340		


Data definition with optimum efficiency. LU-139678
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



Technical features


Size	355 mm
Surface of rotor	Thick layer passivated
Material of impeller	PP plastic
Number of blades	6
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"F"
Humidity class	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	CE
Approval	CCC

Product drawing

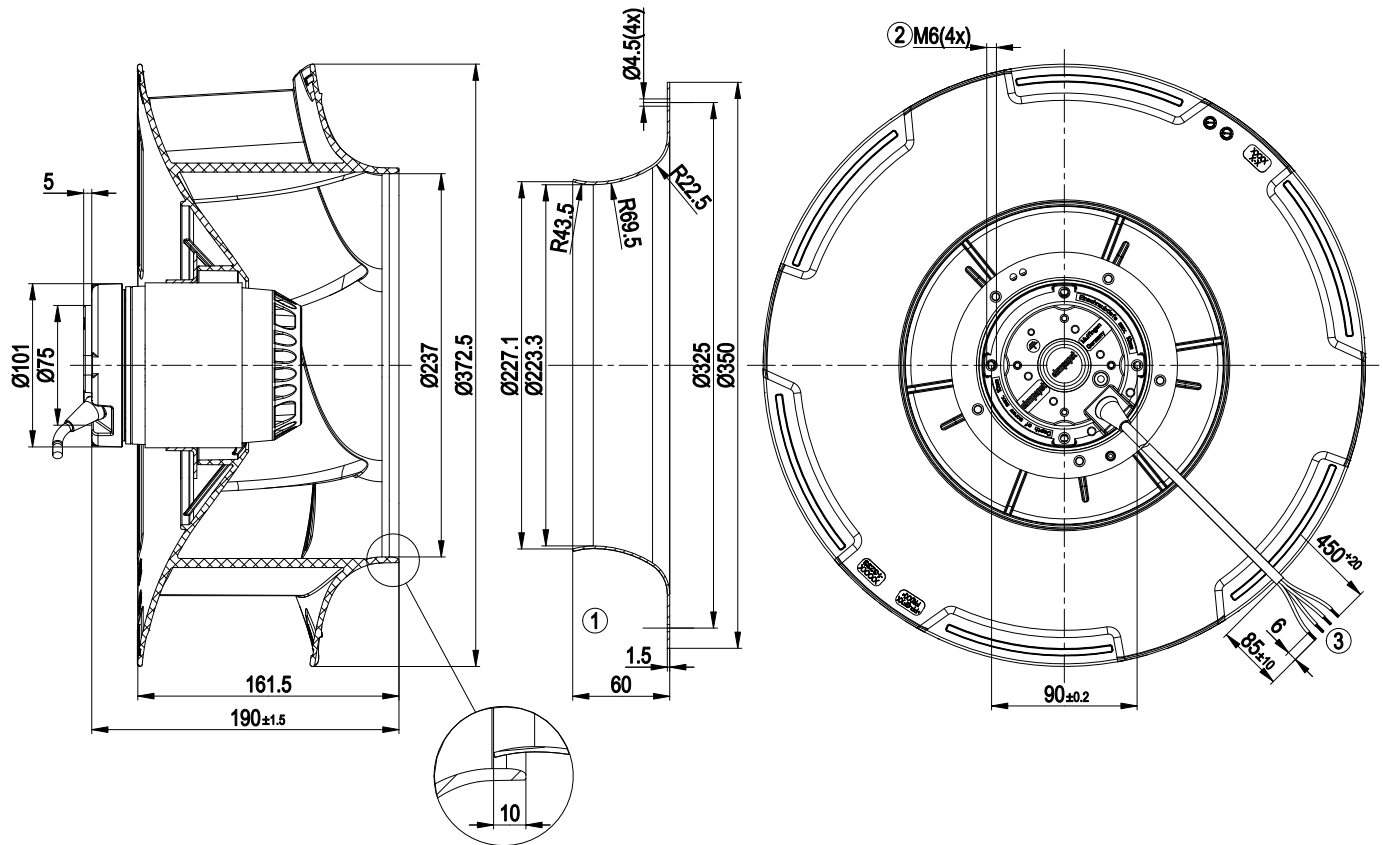


- | | |
|---|--|
| 1 | Accessory part: inlet nozzle 35500-2-4013 not included in the standard scope of delivery; other inlet nozzles on request |
| 2 | Depth of screw max. 10 mm |
| 3 | Connection line silicone 4G 0.5 mm², 4 x brass lead tips crimped |

Connection screen



U1	blue	Z	brown	U2	black
PE	green/yellow				

Charts: Air flow 50 Hz

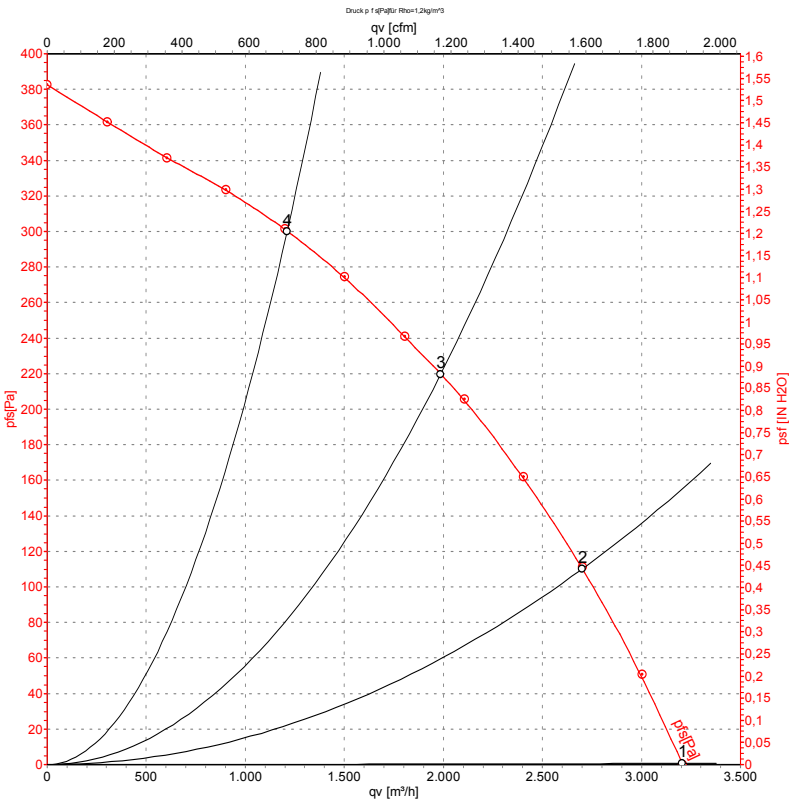

Measurement: LU-139678

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	L _{wA_{in}}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	m³/h	Pa
1	230	50	1405	200	0.89	72	3200	0
2	230	50	1375	230	1.02	66	2700	110
3	230	50	1330	270	1.18	61	1990	220
4	230	50	1360	245	1.07	63	1210	300

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · L_{wA_{in}} = Sound power level inlet side · qv = Air flow · p_{fs} = Pressure increase

