

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd

Phone +86 10-62547612

zhangyu@bjhengrui.cn

en.bjhengrui.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | A3G800-AY27-01    |            |
| Motor                    | M3G150-IF         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 1130       |
| Power consumption        | W                 | 2400       |
| Current draw             | A                 | 3.7        |
| Max. back pressure       | Pa                | 240        |
| Max. back pressure       | in. wg            | 0.96       |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 70         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011

|                                   |   | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency $\eta_{es}$ | % | 47.7   | 35.9      |
| 02 Measurement category           |   | A      |           |
| 03 Efficiency category            |   | Static |           |
| 04 Efficiency grade N             |   | 51.8   | 40        |
| 05 Variable speed drive           |   | Yes    |           |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

|                               |                   |       |
|-------------------------------|-------------------|-------|
| 09 Power consumption $P_{ed}$ | kW                | 2.25  |
| 09 Air flow $q_v$             | m³/h              | 15830 |
| 09 Pressure increase $p_{fs}$ | Pa                | 230   |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 1135  |
| 11 Specific ratio*            |                   | 1.00  |

\* Specific ratio =  $1 + p_s / 100\,000\text{ Pa}$ 

LU-122292




## Technical description

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 26.1 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Size                                                                       | 800 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Motor size                                                                 | 150                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Electronics housing material                                               | Die-cast aluminum, painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Blade material                                                             | Sheet aluminum insert, sprayed with PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Number of blades                                                           | 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Blade pitch                                                                | -5°                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Airflow direction                                                          | V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Degree of protection                                                       | IP55                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Insulation class                                                           | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Moisture (F) / Environmental (H) protection class                          | H2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Condensation drainage holes                                                | On rotor side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Output 20 VDC, max. 50 mA</li> <li>- Output for slave 0-10 V</li> <li>- Operation and alarm display</li> <li>- Input for sensor 0-10 V or 4-20 mA</li> <li>- External 24 V input (parameter setting)</li> <li>- External release input</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limitation</li> <li>- PFC, passive</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from supply</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC immunity to interference                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| EMC interference emission                                                  | According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | ≤ 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Electrical hookup                                                          | Terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Motor protection                                                           | Reverse polarity and locked-rotor protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Protection class                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Conformity with standards                                                  | EN 61800-5-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |




## Product drawing

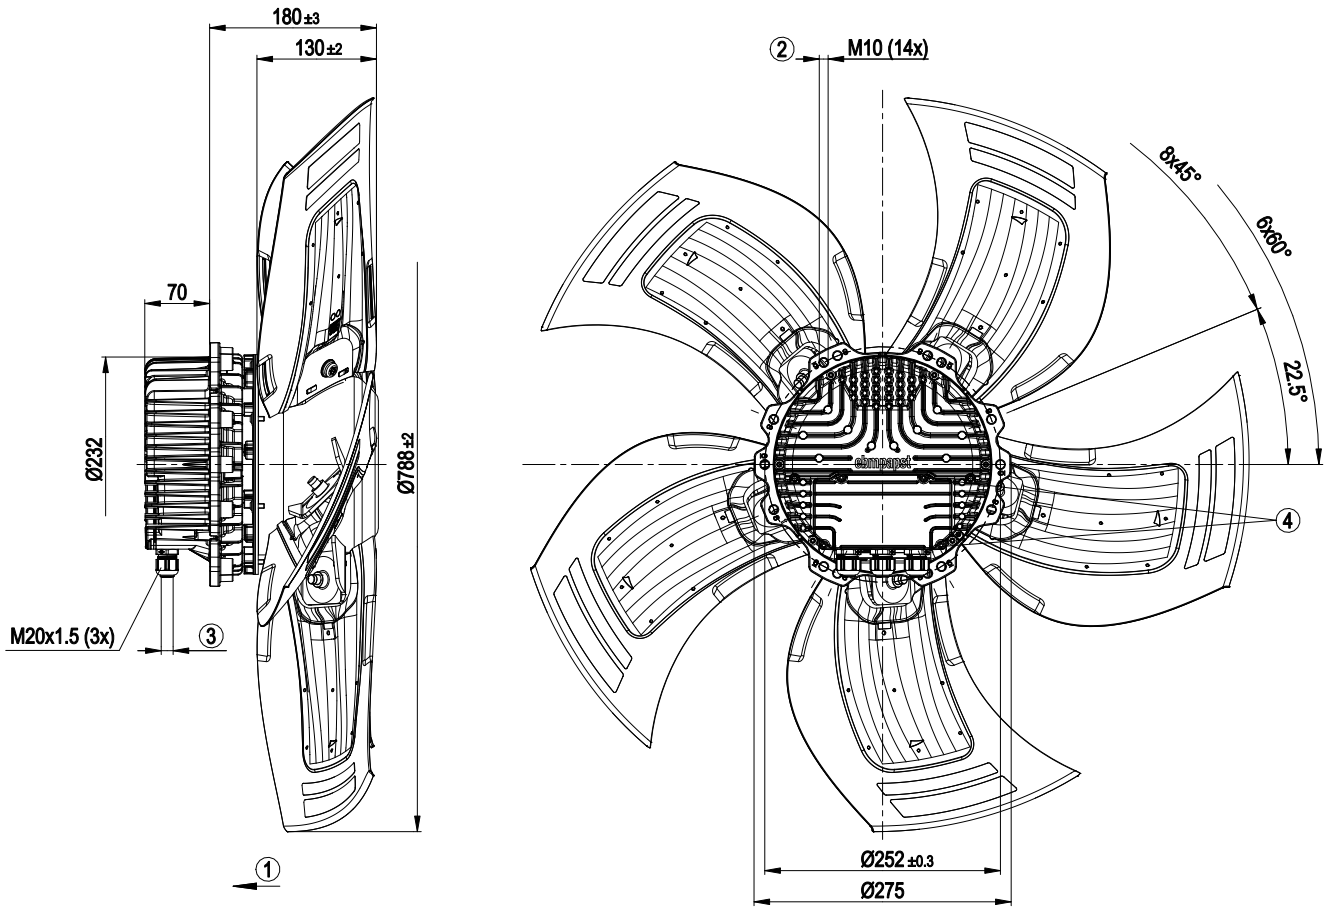

|   |                                                                        |
|---|------------------------------------------------------------------------|
| 1 | Direction of air flow "V"                                              |
| 2 | Max. clearance for screw 25 mm                                         |
| 3 | Cable diameter min. 4 mm, max. 10 mm, tightening torque $4 \pm 0.6$ Nm |
| 4 | Tightening torque $3.5 \pm 0.5$ Nm                                     |

## Connection diagram

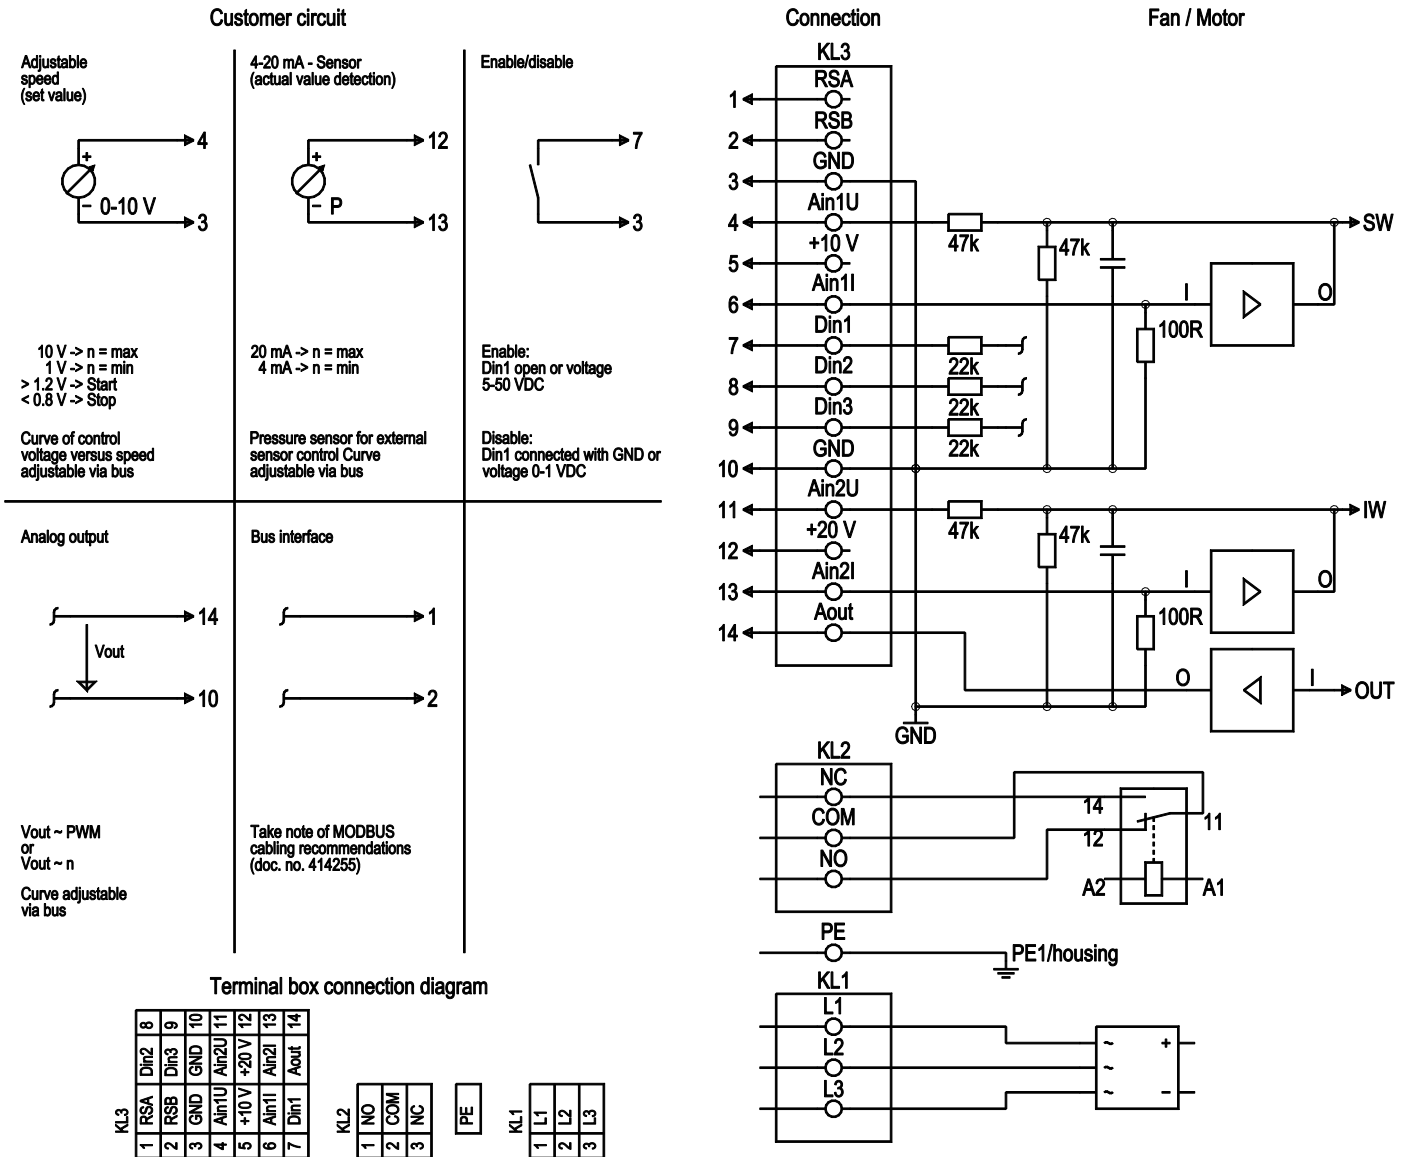

| No.  | Conn.  | Designation | Function/assignment                                                                                                                |
|------|--------|-------------|------------------------------------------------------------------------------------------------------------------------------------|
| KL 1 | 1      | L1          | Supply connection, power supply; for nominal voltage range see technical data                                                      |
| KL 1 | 2      | L2          | Supply connection, power supply; for nominal voltage range see technical data                                                      |
| KL 1 | 3      | L3          | Supply connection, power supply; for nominal voltage range see technical data                                                      |
| PE   |        | PE          | Ground connection, PE connection                                                                                                   |
| KL 2 | 1      | NO          | Status relay, floating status contact, make for failure                                                                            |
| KL2  | 2      | COM         | Status relay, floating status contact, changeover contact, common connection, contact rating 250 VAC / max. 2 A (AC1) / min. 10 mA |
| KL2  | 3      | NC          | Status relay, floating status contact, break for failure                                                                           |
| KL 3 | 1      | RSA         | Bus connection RS485, RSA, MODBUS-RTU; SELV                                                                                        |
| KL 3 | 2      | RSB         | Bus connection RS485, RSB, MODBUS-RTU; SELV                                                                                        |
| KL 3 | 3 / 10 | GND         | Reference ground for control interface; SELV                                                                                       |
| KL 3 | 4      | Ain1 U      | Analog input 1, set value: 0-10 V, Ri = 100 kΩ, adjustable curve, only usable as alternative to input Ain1I; SELV                  |


# EC axial fan - HyBlade

sickle-shaped blades (S series)

| No.  | Conn. | Designation | Function/assignment                                                                                                                                                                                                                                                                        |
|------|-------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KL 3 | 5     | + 10 V      | Fixed voltage output 10 VDC, +10 V $\pm 3\%$ , max. 10 mA, short-circuit-proof power supply for external devices (e.g. pot); SELV                                                                                                                                                          |
| KL 3 | 6     | Ain1 I      | Analog input 1, set value: 4-20 mA, $R_i = 100\ \Omega$ , adjustable curve, only usable as alternative to input Ain1U; SELV                                                                                                                                                                |
| KL 3 | 7     | Din1        | Digital input 1: enable electronics,<br>enable: pin open or applied voltage 5-50 VDC<br>disable: bridge to GND or applied voltage < 1 VDC<br>reset function: triggers software reset after a level change to < 1 VDC; SELV                                                                 |
| KL 3 | 8     | Din2        | Digital input 2: Switching parameter sets 1/2, according to EEPROM setting, the valid or used parameter set can be selected via bus or via digital input DIN2.<br>Parameter set 1: pin open or applied voltage 5-50 VDC<br>Parameter set 2: bridge to GND or applied voltage < 1 VDC; SELV |
| KL 3 | 9     | Din3        | Digital input 3: according to EEPROM setting, the integrated controller's direction of action can be selected via bus or digital input Din3;<br>normal: pin open or applied voltage 5-50 VDC<br>inverse: bridge to GND or applied voltage < 1 VDC; SELV                                    |
| KL 3 | 11    | Ain2 U      | Analog input 2, measured value: 0-10 V, $R_i = 100\ k\Omega$ , adjustable curve, only usable as alternative to input Ain2I; SELV                                                                                                                                                           |
| KL 3 | 12    | + 20 V      | Fixed voltage output 20 VDC, +20 V $\pm 25/-10\%$ , max. 50 mA, short-circuit-proof power supply for external devices (e.g. sensors); SELV<br>or: +24 VDC input for parameter setting without line voltage                                                                                 |
| KL 3 | 13    | Ain2 I      | Analog input 2, measured value: 4-20 mA, $R_i = 100\ \Omega$ , adjustable curve, only usable as alternative to input Ain2U; SELV                                                                                                                                                           |
| KL 3 | 14    | Aout        | Analog output 0-10 VDC, max. 5 mA, output of current motor modulation level / motor speed adjustable curve; SELV                                                                                                                                                                           |



## Curves: Air performance 50 Hz

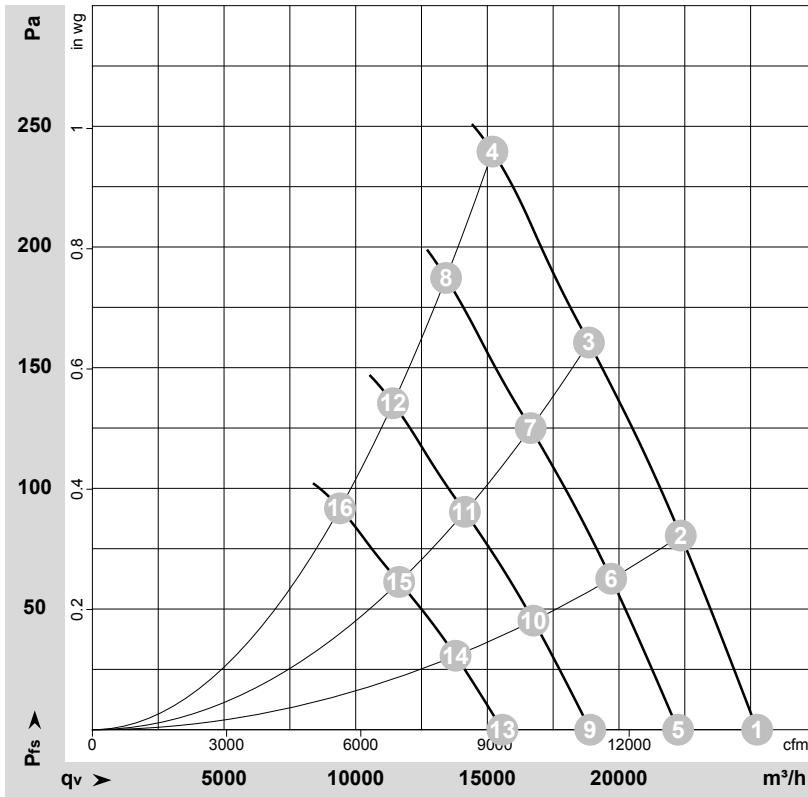

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-122292-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 400 | 50 | 1130              | 1410            | 2.16 | 71                | 78                | 78                 | 25250             | 0               | 14860          | 0.00            |
| 2  | 400 | 50 | 1130              | 1756            | 2.69 | 69                | 75                | 75                 | 22345             | 80              | 13155          | 0.32            |
| 3  | 400 | 50 | 1130              | 2038            | 3.14 | 71                | 78                | 76                 | 18860             | 160             | 11100          | 0.64            |
| 4  | 400 | 50 | 1130              | 2400            | 3.70 | 76                | 82                | 81                 | 15195             | 240             | 8945           | 0.96            |
| 5  | 400 | 50 | 1000              | 964             | 1.48 | 68                | 75                | 75                 | 22245             | 0               | 13095          | 0.00            |
| 6  | 400 | 50 | 1000              | 1204            | 1.84 | 65                | 72                | 72                 | 19705             | 63              | 11600          | 0.25            |
| 7  | 400 | 50 | 1000              | 1401            | 2.16 | 68                | 74                | 73                 | 16645             | 125             | 9795           | 0.50            |
| 8  | 400 | 50 | 1000              | 1582            | 2.40 | 72                | 79                | 78                 | 13435             | 187             | 7905           | 0.75            |
| 9  | 400 | 50 | 850               | 592             | 0.91 | 64                | 70                | 71                 | 18910             | 0               | 11130          | 0.00            |
| 10 | 400 | 50 | 850               | 739             | 1.13 | 61                | 68                | 68                 | 16750             | 45              | 9860           | 0.18            |
| 11 | 400 | 50 | 850               | 861             | 1.33 | 64                | 70                | 69                 | 14150             | 90              | 8325           | 0.36            |
| 12 | 400 | 50 | 850               | 971             | 1.48 | 68                | 75                | 74                 | 11420             | 135             | 6720           | 0.54            |
| 13 | 400 | 50 | 700               | 331             | 0.51 | 59                | 66                | 66                 | 15570             | 0               | 9165           | 0.00            |
| 14 | 400 | 50 | 700               | 413             | 0.63 | 56                | 63                | 63                 | 13795             | 31              | 8120           | 0.12            |
| 15 | 400 | 50 | 700               | 481             | 0.74 | 59                | 65                | 64                 | 11650             | 61              | 6860           | 0.24            |
| 16 | 400 | 50 | 700               | 542             | 0.82 | 64                | 70                | 69                 | 9405              | 92              | 5535           | 0.37            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

