

Movement by Perfection



The Royal League in ventilation, control and drive technology



Product documentation

Type
FB063-6EK.4I.V4P

Article number
101680

Product documentation

Customer
Actrol

Beijing Hengrui Mechanical and Electrical Equipment
Co., Ltd

Project
Axial Fan

+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

Type
FB063-6EK.4I.V4P

Article number
101680



Contents

1.	Product specification	3
2.	Characteristic Curve	4
3.	Drawing	5
4.	Connection diagram	6

1. Product specification

Technical data

Article number	101680
Type	FB063-6EK.4I.V4P
Designation	Axial fan with sheet blades
Rated values	1~230V±10% 50Hz P ₁ 0,63kW 3.00A ΔI=0% 860/min 12.0uF/400V 40°C
Electrical connection	Terminal box K62
Min. operating temperature °C	-25***
Mounting type terminal box	Mounted on Stator
Type of protection	IP54
Thermal class	THCL155
Connection diagram	1360-104XA
Rating plate	1x fixed
Fitting position	H/Vu/Vo
Motor protection	thermal contact
Impregnation	Moisture and hot climate protection
Quality of bearings	ball bearing with long-time lubrication
Material Rotor	Aluminium
Painting rotor	Rotor 1 coat painted
colour rotor	RAL 9005 (jet black)
Material blades	Aluminium
Painting impeller	1 coat painted
Colour blades	RAL 9005 (jet black)
Control	--
Painting mot.suspens	Motor suspension 1 coat paint
colour suspension	RAL 9005 (jet black)
Weight kg	12,80
ErP Data	Efficiency η_{statA} : 28,3 % Efficiency grade: $N_{actual} = 36,1 / N_{target} = 36^*$ *ErP 2013* Does not comply with the stipulations of the ErP regulations

*** Occasional operation $\leq -20^{\circ}\text{C}$ and in consideration of lowest temperature according to product documentation permissible. For cooling applications with continuous operation $\leq -20^{\circ}\text{C}$ cold design on request.


2. Characteristic Curve

FB063-6EK.4I.V4P


1~ 230V 50Hz

Messdichte 1,16


Air performance

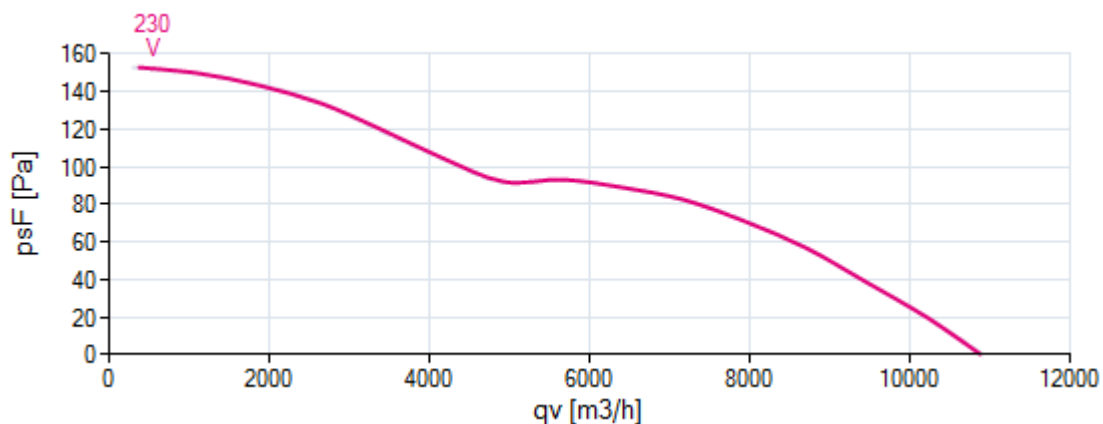


Acoustics

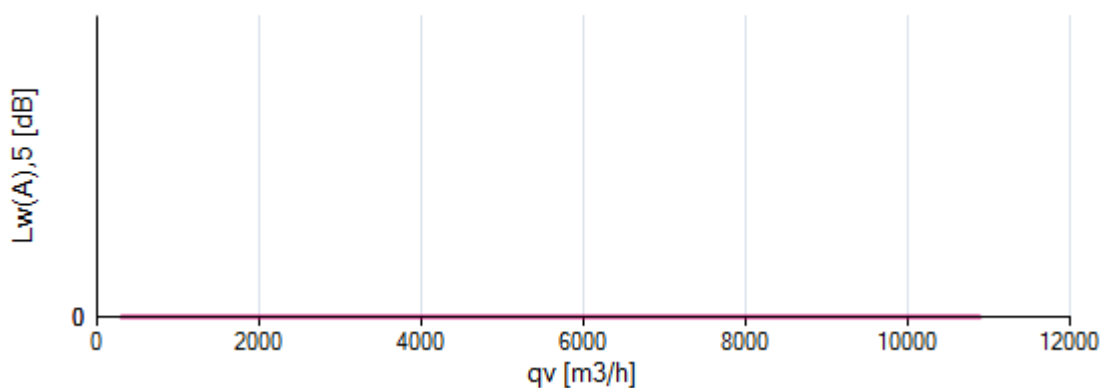

Power input

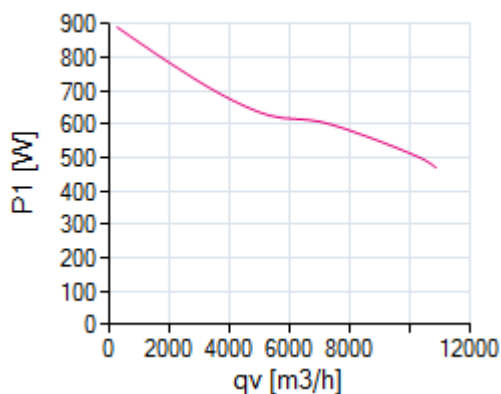

Efficiency

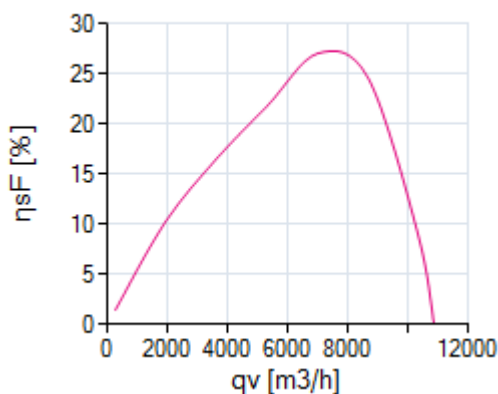

Please note: It's not allowed to use this fan in the stall area!*

*In doubt please ask your responsible ZIEHL-ABEGG sales contact.


4. Connection diagram

1360-104XA

1~Motor with capacitor and thermostatic switch (if built in).

BN brown
BU blue
BK black
OG orange
WH white
GNYE green-yellow

Clockwise rotation

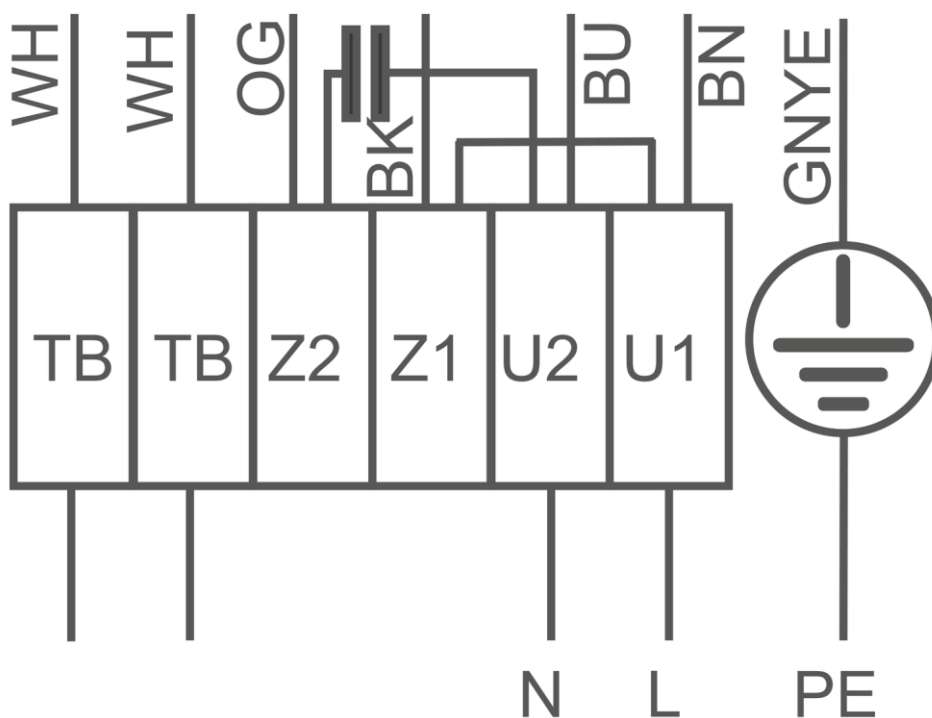



The Royal League in ventilation, control and drive technology

Intelligent control technology for any application

ZIEHL-ABEGG system capabilities:

Everything from a single source – perfectly matched for optimal performance

Please contact us. We would be pleased to design an individual solution for your requirements.

We would like to welcome you on our worldwide exhibitions. Please find our next exhibitions [here](#).