


30x30x15 mm

2.7~6.0 CFM




#### ■ Specification


|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MF30150V1-10000-A99                                                               | ●       | 5             | 140           | 0.70              | 9500  | 6.0     | 0.17                    | 27.0    | 9.7    | 1     |
| MF30150V2-10000-A99                                                               | ●       | 5             | 80            | 0.40              | 7300  | 4.9     | 0.12                    | 20.0    | 9.7    | 2     |
| MF30150V3-10000-A99                                                               | ●       | 5             | 45            | 0.23              | 5200  | 2.8     | 0.05                    | 9.8     | 9.7    | 3     |
| MF30151V1-10000-A99                                                               | ●       | 12            | 65            | 0.78              | 9500  | 6.0     | 0.17                    | 27.0    | 9.7    | 1     |
| MF30151V2-10000-A99                                                               | ●       | 12            | 35            | 0.42              | 7000  | 4.8     | 0.12                    | 19.0    | 9.7    | 2     |
| MF30151V3-10000-A99                                                               | ●       | 12            | 20            | 0.24              | 4600  | 2.7     | 0.05                    | 7.8     | 9.7    | 3     |

■ Function (5V) R Type : F99 / F Type : G99 / PWM : H99, Q99, S99  
(12V) R Type : F99 / F Type : G99

#### ■ Air Flow-Static Pressure Characteristics

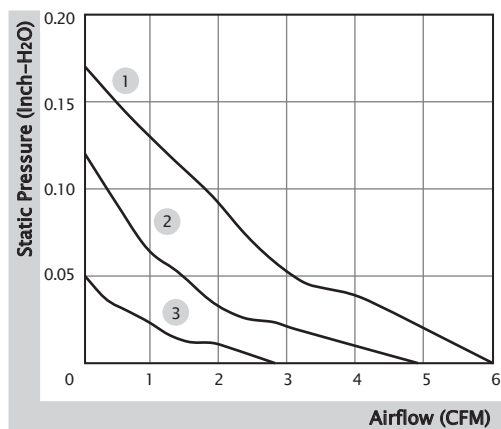

#### ■ External Dimensions(mm)

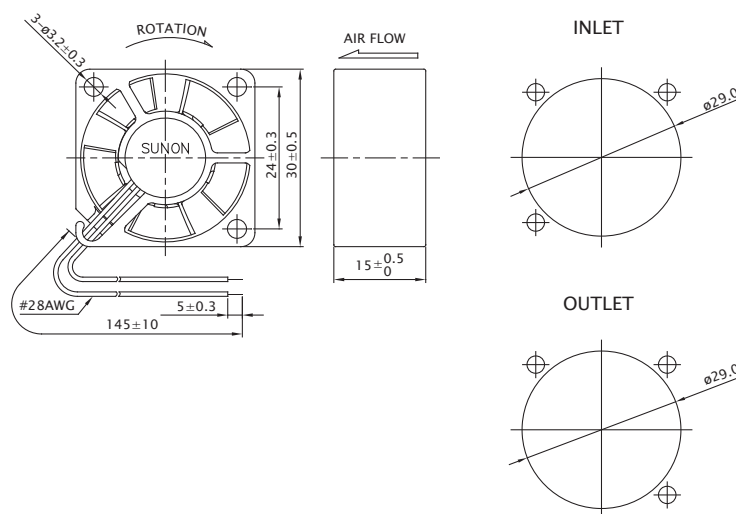

35x35x6 mm

4.3~5.5 CFM




■ Specification


|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MF35060V1-10000-A99                                                               | ●       | 5             | 120           | 0.60              | 7600  | 5.5     | 0.11                    | 26.0    | 7.0    | 1     |
| MF35060V2-10000-A99                                                               | ●       | 5             | 66            | 0.33              | 5800  | 4.3     | 0.07                    | 18.3    | 7.0    | 2     |

■ Function    R Type : F99   /   F Type : G99   /   PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

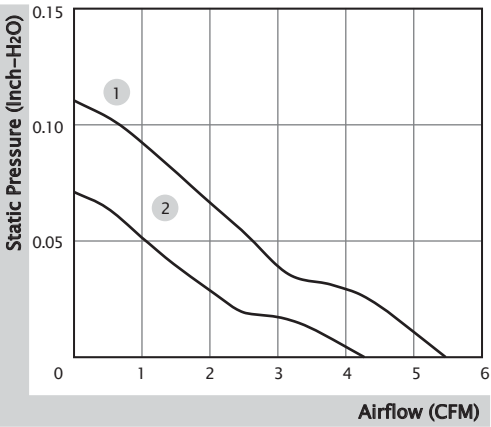

■ External Dimensions(mm)

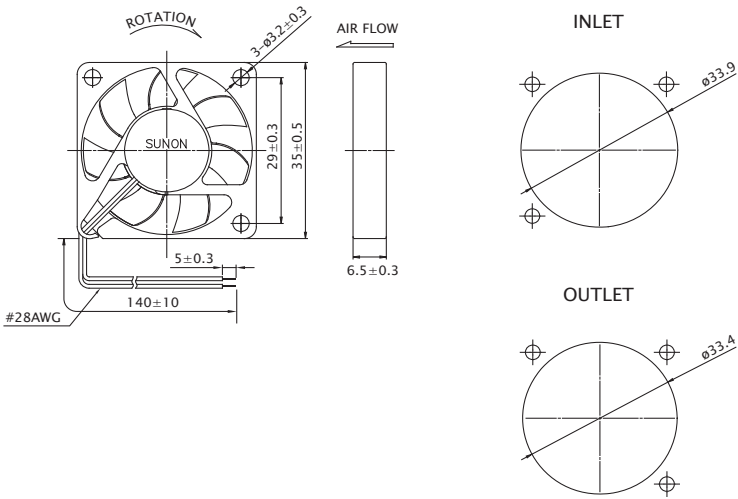

# 35x35x10 mm

## 3.6~7.2 CFM




### ■ Specification

|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MF35100V1-10000-A99                                                               | ●       | 5             | 135           | 0.68              | 10000 | 7.2     | 0.22                    | 28.0    | 10.5   | 1     |
| MF35100V2-10000-A99                                                               | ●       | 5             | 80            | 0.40              | 7500  | 6.5     | 0.13                    | 21.8    | 10.5   | 2     |
| MF35100V3-10000-A99                                                               | ●       | 5             | 45            | 0.23              | 5300  | 3.7     | 0.07                    | 13.1    | 10.5   | 3     |
| MF35101V1-10000-A99                                                               | ●       | 12            | 60            | 0.72              | 10000 | 7.2     | 0.22                    | 28.0    | 10.5   | 1     |
| MF35101V2-10000-A99                                                               | ●       | 12            | 35            | 0.42              | 7500  | 6.5     | 0.13                    | 21.8    | 10.5   | 2     |
| MF35101V3-10000-A99                                                               | ●       | 12            | 20            | 0.24              | 5000  | 3.6     | 0.07                    | 12.0    | 10.5   | 3     |

■ Function (5V) R Type : F99 / F Type : G99 / PWM : H99, Q99, S99  
(12V) R Type : F99 / F Type : G99

### ■ Air Flow-Static Pressure Characteristics

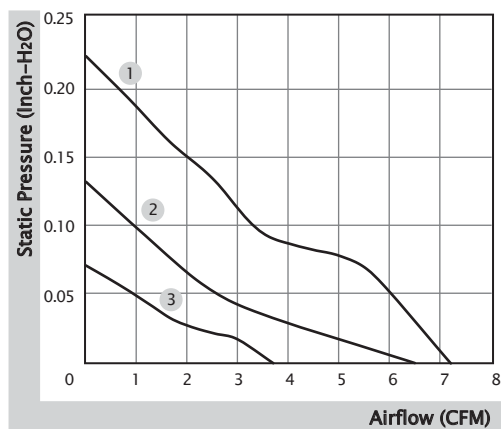

### ■ External Dimensions(mm)

